

FIELD HOCKEY FIELD REPLACEMENT

GRADING PERMIT PLAN SET

BUILDING 09-347

HOCKEY FIELD

667 NELSON MALL

STANFORD UNIVERSITY

STANFORD

CALIFORNIA

PROJECT MANAGER:

Mark Bonino

340 Bonair Siding Road

Stanford, CA 94305

mbonino@stanford.edu

COUNTY OF SANTA CLARA

General Construction Specifications

GENERAL CONDITIONS

- ALL CONSTRUCTION WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE SOILS AND/OR GEOTECHNICAL REPORT PREPARED BY _____ AND DATED _____. THIS REPORT IS SUPPLEMENTED BY: 1) THESE PLANS AND SPECIFICATIONS, 2) THE COUNTY OF SANTA CLARA STANDARD DETAILS, 3) THE COUNTY OF SANTA CLARA STANDARD SPECS, 4) STATE OF CALIFORNIA STANDARD DETAILS, 5) STATE OF CALIFORNIA STANDARD SPECIFICATIONS. IN THE EVENT OF CONFLICT THE FORMER SHALL TAKE PRECEDENCE OVER THE LATTER, THE PERFORMANCE AND COMPLETION OF ALL WORK MUST BE TO THE SATISFACTION OF THE COUNTY.
- DEVELOPER IS RESPONSIBLE FOR INSTALLATION OF THE IMPROVEMENTS SHOWN ON THESE PLANS AND HE OR HIS SUCCESSOR PROPERTY OWNERS ARE RESPONSIBLE FOR THEIR CONTINUED MAINTENANCE.
- DEVELOPER SHALL BE RESPONSIBLE FOR CORRECTION OF ANY ERRORS OR OMISSIONS IN THESE PLANS, THE COUNTY SHALL BE AUTHORIZED TO REQUIRE DISCONTINUANCE OF ANY WORK AND SUCH CORRECTION AND MODIFICATION OF PLANS AS MAY BE NECESSARY TO COMPLY WITH COUNTY STANDARDS OR CONDITIONS OF CONSENT APPROVAL.
- DEVELOPER SHALL OBTAIN ENCROACHMENT PERMITS FROM THE SANTA CLARA VALLEY WATER DISTRICT AND CALIFORNIA DEPARTMENT OF TRANSPORTATION WHERE NEEEDED. COPIES OF THESE PERMITS SHALL BE KEPT AT THE JOB SITE FOR REVIEW BY THE COUNTY INSPECTOR.
- DEVELOPER SHALL REMOVE OR TRIM ALL TREES TO PROVIDE AN UNOBSTRUCTED FIFTEEN (15) FOOT VERTICAL CLEARANCE FOR ROADWAY AREA.
- THIS PLAN AUTHORIZES THE REMOVAL OF ONLY THOSE TREES WITH TRUNK DIAMETERS GREATER THAN 12 INCHES MEASURED 4.5 FEET ABOVE THE GROUND THAT ARE SHOWN TO BE REMOVED UNLESS AN AMENDED PLAN IS APPROVED OR A SEPARATE TREE REMOVAL PERMIT IS OBTAINED FROM THE PLANNING OFFICE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT REMOVAL OF ADDITIONAL TREES HAS BEEN PERMITTED.
- DEVELOPER SHALL PROVIDE ADEQUATE DUST CONTROL AS REQUIRED BY THE COUNTY INSPECTOR.
- ALL PERSONS MUST COMPLY WITH SECTION 4442 OF THE PUBLIC RESOURCES CODE AND SECTION 13005 OF THE HEALTH AND SAFETY CODE RELATING TO THE USE OF SPARK ARRESTERS.
- UPON DISCOVERING OR UNEARTHING ANY BURIAL SITE AS EVIDENCED BY HUMAN SKELETAL REMAINS OR ARTIFACTS, THE PERSON MAKING SUCH DISCOVERY SHALL IMMEDIATELY NOTIFY THE COUNTY CORONER AT (408) 454-2520 AND LAND DEVELOPMENT ENGINEERING OFFICE AT (408) 299-5730. NO FURTHER DISTURBANCE OF THE SITE MAY BE MADE EXCEPT AS AUTHORIZED BY THE LAND DEVELOPMENT OFFICE IN ACCORD WITH PROVISIONS OF THIS ORDINANCE (COUNTY ORDINANCE CODE SECTION BE-18).
- THESE PLANS ARE FOR THE WORK DESCRIBED IN THE SCOPE OF WORK ONLY. A SEPARATE PERMIT WILL BE REQUIRED FOR THE SEPTIC LINE CONSTRUCTION. ANY DEVIATION FROM THESE APPROVED PLANS SHALL BE RE-APPROVED IN WRITING BY THE COUNTY ENGINEER PRIOR TO CONSTRUCTION.

CONSTRUCTION STAKING

- THE DEVELOPER'S ENGINEER IS RESPONSIBLE FOR THE INITIAL PLACEMENT AND REPLACEMENT OF CONSTRUCTION GRADE STAKES. THE STAKES ARE TO BE ADEQUATELY IDENTIFIED, LOCATED, STABILIZED, ETC. FOR THE CONVENIENCE OF CONTRACTORS. LATERAL OFFSET OF STAKES SET FOR CURBS AND GUTTERS SHALL NOT EXCEED 2 1/2 FEET FROM BACK OF CURB.
- ANY PROPERTY LINE STAKES OR ROAD MONUMENTS DISTURBED DURING CONSTRUCTION SHALL BE REPLACED BY DEVELOPER'S ENGINEER AND LICENSED LAND SURVEYOR.
- PROPERTY LINE STAKING MUST BE PERFORMED BY THE PROJECT ENGINEER OR LAND SURVEYOR TO ESTABLISH OR RE-ESTABLISH THE PROJECT BOUNDARY AND SHALL BE INSPECTED BY THE COUNTY INSPECTOR PRIOR TO THE BEGINNING OF THE WORK.
- PROPER CONSTRUCTION STAKES SHALL BE SET IN THE FIELD BY THE PROJECT ENGINEER OR LAND SURVEYOR AND VERIFIED BY THE COUNTY INSPECTOR PRIOR TO THE COMMENCEMENT OF GRADING.

CONSTRUCTION INSPECTION

- CONTRACTOR SHALL NOTIFY PERMIT INSPECTION UNIT, SANTA CLARA COUNTY PRIOR TO COMMENCING WORK AND FOR FINAL INSPECTION OF WORK AND SITE.
- THE COUNTY OFFICE OF 24 HOURS ADVANCE NOTICE FOR GENERAL INSPECTION, 48 HOURS FOR ASPHALT CONCRETE INSPECTION.
- INSPECTION BY SANTA CLARA COUNTY SHALL BE LIMITED TO INSPECTION OF MATERIALS AND PROCESSES OF CONSTRUCTION TO OBSERVE THEIR COMPLIANCE WITH THESE SPECIFICATIONS BUT DOES NOT INCLUDE RESPONSIBILITY FOR THE SUPERINTENDENT OF CONSTRUCTION, SITE CONDITIONS, EQUIPMENT OR PERSONNEL. CONTRACTOR SHALL NOTIFY THE COUNTY LAND DEVELOPMENT INSPECTOR AT PHONE (408) 299-6868 AT LEAST 24 HOURS PRIOR TO COMMENCING WORK AND FOR FINAL INSPECTION OF WORK AND SITE.
- DEVELOPER AND/OR HIS AUTHORIZED REPRESENTATIVE MUST SUBMIT WRITTEN REQUEST FOR FINAL INSPECTION AND ACCEPTANCE. SAID REQUEST SHALL BE DIRECTED TO THE INSPECTION OFFICE NOTED ON THE PERMIT FORM.
- THE CONTRACTOR SHALL PROVIDE TO THE COUNTY CONSTRUCTION INSPECTOR WITH PAD ELEVATION AND LOCATION CERTIFICATES, PREPARED BY THE PROJECT ENGINEER OR LAND SURVEYOR, PRIOR TO COMMENCEMENT OF THE BUILDING FOUNDATION.

SITE PREPARATION (CLEARING AND GRUBBING)

- EXISTING TREES AUTHORIZED FOR REMOVAL, ROOTS, AND FOREIGN MATERIAL IN AREAS TO BE IMPROVED WILL BE REMOVED TO AN AUTHORIZED DISPOSAL SITE AS FOLLOWS:
 - TO A MINIMUM DEPTH OF TWO FEET BELOW THE FINISHED GRADE OF PROPOSED ROADWAYS (EITHER PRIVATE OR TO BE DEDICATED TO PUBLIC USE)
 - FROM AREAS AFFECTED BY THE PROPOSED GRADING EXCEPT WHERE NOTED ON THE PLANS.
- IT SHALL BE THE RESPONSIBILITY OF THE DEVELOPER TO MOVE OR RELOCATE UTILITY POLES AND OTHER OBSTRUCTIONS IN THE WAY OF CONSTRUCTION.

UTILITY LOCATION, TRENCHING & BACKFILL

- CONTRACTOR SHALL NOTIFY USA (UNDERGROUND SERVICE ALERT) AT 1-800-277-2600 A MINIMUM OF 24 HOURS BEFORE BEGINNING UNDERGROUND WORK FOR VERIFICATION OF THE LOCATION OF UNDERGROUND UTILITIES.
- ACCURATE VERIFICATION AS TO SIZE, LOCATION, AND DEPTH OF EXISTING UNDERGROUND CONDUITS OR FACILITIES SHALL BE THE INDIVIDUAL CONTRACTORS RESPONSIBILITY. PLAN LOCATIONS ARE APPROXIMATE AND FOR GENERAL INFORMATION ONLY.
- ALL UNDERGROUND INSTALLATIONS SHALL BE IN PLACE AND THE TRENCH BACKFILLED AND COMPACTED BEFORE PLACING AGGREGATE BASE MATERIAL OR SURFACE STRUCTURES. SURFACING MAY BE DONE IF THE UTILITY COMPANY CONCERNED INDICATES BY LETTER THAT IT WILL BORE, UNLESS SPECIFICALLY AUTHORIZED BY THE COUNTY, GAS AND WATER MAINS SHALL BE INSTALLED OUTSIDE THE PAVED AREAS.
- TRENCH BACKFILL IN EXISTING PAVEMENT AREAS SHALL BE SAND MATERIAL IN ACCORDANCE WITH THE APPLICABLE PROVISIONS OF THE STATE SPECIFICATIONS. THE STRUCTURAL SECTION FOR TRENCH REPLACEMENT SHALL CONSIST OF NOT LESS THAN 12 INCHES OF APPROVED AGGREGATE BASE MATERIAL COMPACTED TO A RELATIVE COMPACTION OF AT LEAST 95% AND 4 INCHES OF HOT ASPHALT CONCRETE PLACED IN TWO LIFTS. TRENCH RESTORATION FOR HIGHWAY TYPE PAVEMENTS SHALL BE MADE IN KIND OR AS DIRECTED BY THE COUNTY.
- TRENCH BACKFILL IN NEW CONSTRUCTION AREAS SHALL BE SAND MATERIAL COMPACTED TO A RELATIVE COMPACTION OF AT LEAST 90%. THE REQUIREMENT FOR SELECT MATERIAL MAY BE WAIVED BY COUNTY IF THE NATIVE SOIL IS SUITABLE FOR USE AS TRENCH BACKFILL BUT THE COMPACTION REQUIREMENTS WILL NOT BE THEREBY WAIVED.
- BACKFILL AND TRENCH RESTORATION REQUIREMENTS SHALL APPLY AS MINIMUM STANDARDS TO ALL UNDERGROUND FACILITIES INSTALLED BY OTHER FIRMS OR PUBLIC AGENCIES.

RETAINING WALLS

- REINFORCED CONCRETE AND CONCRETE MASONRY UNIT RETAINING WALLS SHALL HAVE FOUNDATION AND REINFORCEMENT INSPECTED BY THE COUNTY ENGINEERING INSPECTOR AND ENGINEER OF RECORD PRIOR TO POURING THE FOUNDATION AND FORMING THE WALL.
- SEGMENTAL BLOCK RETAINING WALLS SHALL HAVE FOUNDATION AND REINFORCEMENT INSPECTED BY THE COUNTY ENGINEERING INSPECTOR.

GRADING

- EXCAVATED MATERIAL SHALL BE PLACED IN THE FILL AREAS DESIGNATED OR SHALL BE HAULED AWAY FROM THE SITE TO A COUNTY APPROVED DISPOSAL SITE. WHERE FILL MATERIAL IS TO BE PLACED ON NATURAL GROUND, IT SHALL BE STRIPPED OF ALL VEGETATION, TO ACHIEVE A PROPER BOND WITH THE FILL MATERIAL, THE SURFACE OF THE GROUND SHALL BE SCARIFIED TO A DEPTH OF 6" BEFORE FILL IS PLACED. WHERE NATURAL GROUND IS STEEPER THAN 5:1, IT SHALL BE BENCHED AND THE FILL KEED IN TO ACHIEVE STABILITY. WHERE NEW FILL IS TO BE PLACED ON EXISTING FILL, THE EXISTING FILL SHALL BE REMOVED UNTIL MATERIAL COMPACTED TO BOND RELATIONSHIP IS EXPOSED. THEN THE NEW FILL MATERIAL SHALL BE PLACED AS PER THESE CONSTRUCTION NOTES. FILL MATERIAL SHALL BE PLACED IN UNIFORM LIFTS NOT EXCEEDING 6" IN UNCOMPACTED THICKNESS. BEFORE COMPACTION BEGINS, THE FILL SHALL BE BROUGHT TO A WATER CONTENT THAT WILL PERMIT PROPER COMPACTION BY EITHER 1) AERATING THE FILL IF IT IS TOO WET OR 2) MOISTENING THE FILL WITH WATER IF IT IS TOO DRY. EACH LIFT SHALL BE THOROUGHLY MIXED BEFORE COMPACTION TO ENSURE A UNIFORM DISTRIBUTION OF MOISTURE.
- EXCESS OUT MATERIAL SHALL NOT BE SPREAD OR STOCKPILED ON THE SITE.
- SURPLUS EARTH FILL MATERIAL SHALL BE PLACED IN A SINGLE (8" MAX) THICK LAYER COMPACTED TO WITHSTAND WEATHERING IN THE AREA(S) DELINEATED ON THE PLAN.
- NO ORGANIC MATERIAL SHALL BE PLACED IN ANY FILL. NO TREES SHALL BE REMOVED OUTSIDE OF CUT, FILL OR ROADWAY AREAS.
- THE UPPER 6" OF SUBGRADE BELOW DRIVEWAY ACCESS ROAD OR PARKING AREA SHALL BE COMPACTED TO 95% OF MAXIMUM DENSITY.
- MAXIMUM CUT SLOPE SHALL BE 2 HORIZONTAL TO 1 VERTICAL. MAXIMUM FILL SLOPE SHALL BE 2 HORIZONTAL TO 1 VERTICAL.

LOCATION	CUT (C.Y.)	FILL (C.Y.)	VERT. DEPTH
RESIDENCE	0	0	0
ACCESSORY STRUCTURE	0	0	0
POOL/HARDSCAPE	1,652	1,652	6"
LANDSCAPE	0	0	0
DRIVEWAY	0	0	0
OFF SITE IMPROVEMENTS	0	0	0
TOTAL	1,652	1,652	6"

NOTE: FILL VOLUMES INCLUDE 10% SHRINKAGE. EXCESS MATERIAL SHALL BE OFF HAULED TO A COUNTY APPROVED DUMP SITE.

- NOTIFY SOILS ENGINEER TWO (2) DAYS PRIOR TO COMMENCEMENT OF ANY GRADING WORK TO COORDINATE THE WORK IN THE FIELD.
- ALL MATERIALS FOR FILL SHOULD BE APPROVED BY THE SOILS ENGINEER BEFORE IT IS BROUGHT TO THE SITE.
- THE UPPER 6" OF THE SUBGRADE SOIL SHALL BE SCARIFIED, MOISTURE CONDITIONED AND COMPACTED TO A MINIMUM RELATIVE COMPACTION OF 95%.
- ALL AGGREGATE BASE MATERIAL SHALL BE COMPACTED TO A MINIMUM 95% RELATIVE COMPACTION.
- THE GEOTECHNICAL PLAN REVIEW LETTER MUST BE REVIEWED AND APPROVED BY THE COUNTY INSPECTOR PRIOR TO FINAL APPROVAL BY THE COUNTY ENGINEER FOR BUILDING OCCUPANCY.
- THE PROJECT GEOTECHNICAL ENGINEER SHALL PERFORM COMPACTION TESTING AND PRESENT THE RESULTS TO THE COUNTY ENGINEERING INSPECTOR PRIOR TO THE CONSTRUCTION OF ANY PAVED AREA.
- GRADING WORK BETWEEN OCTOBER 15TH AND APRIL 15TH IS AT THE DISCRETION OF THE SANTA CLARA COUNTY GRADING OFFICIAL.
- TOTAL DISTURBED AREA FOR THE PROJECT 89,239 SF.
- VOID NO.
- THE INSPECTOR MAY VERIFY THAT A VALID NOTICE OF INTENT (NOI) HAS BEEN ISSUED BY THE STATE AND THAT A CURRENT AND UP TO DATE STORM WATER POLLUTION PREVENTION PLAN (SWPPP) IS AVAILABLE ON SITE.

TREE PROTECTION

- FOR ALL TREES TO BE RETAINED WITH A CANOPY IN THE DEVELOPMENT AREA OR DEVELOPMENT ON SITE, THE LIMITS OF GRADING FOR THE PROPOSED DEVELOPMENT ON SITE, THE TREES SHALL BE PROTECTED BY THE PLACEMENT OF RIGID TREE PROTECTIVE FENCING, CONSISTENT WITH THE COUNTY INTEGRATED LANDSCAPE GUIDELINES, AND INCLUDE THE FOLLOWING:
 - FENCING SHOULD BE PLACED ALONG THE OUTSIDE EDGE OF THE DRIFLINE OF THE TREE OR GROVE OF TREES.
 - THE FENCING SHALL BE MAINTAINED THROUGHOUT THE SITE CONSTRUCTION PERIOD AND SHALL BE INSPECTED PERIODICALLY FOR DAMAGE AND PROPER FUNCTION.
 - FENCING SHALL BE REPAIRED, AS NECESSARY, TO PROVIDE A PHYSICAL BARRIER FROM CONSTRUCTION ACTIVITIES.
 - SIGNAGE STATING, "WARNING-- THIS FENCING SHALL NOT BE REMOVED WITHOUT PERMISSION FROM THE SANTA CLARA COUNTY PLANNING OFFICE (408) 299-5770. COUNTY OF SANTA CLARA TREE PROTECTION MEASURES MAY BE FOUND AT <http://www.sccplanning.gov/>" SHALL BE PLACED ON THE TREE PROTECTIVE FENCING UNTIL FINAL OCCUPANCY.
- PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION ACTIVITY, TREE PROTECTIVE FENCING SHALL BE SECURELY IN PLACE AND INSPECTED BY THE LAND DEVELOPMENT ENGINEERING INSPECTOR.
- SEE EXISTING TREE PROTECTION DETAILS FOR MORE INFORMATION.

ACCESS ROADS AND DRIVEWAYS

- DRIVEWAY LOCATIONS SHALL BE AS SHOWN ON THE IMPROVEMENT PLANS WITH CENTERLINE STATIONING, THE MINIMUM CONCRETE THICKNESS SHALL BE 6 INCHES THROUGHOUT (WITH A MAXIMUM APPROACH SLOPE OF 1 1/4 INCHES PER FOOT).
- ALL DRIVEWAY OR COMMON ACCESS ROAD SECTIONS IN EXCESS OF 15 LONGITUDINAL SLOPE MUST BE PAVED WITH A MINIMUM 2-INCH ASPHALT LIFT OR FULL DEPTH CONCRETE LIFT PRIOR TO ANY COMBUSTIBLE FRAMING.
- THE OWNER AND PRIME CONTRACTOR ARE RESPONSIBLE FOR MAINTAINING PROJECT SITE ACCESS AND NEIGHBORHOOD ACCESS FOR EMERGENCY VEHICLES AND LOCAL RESIDENTS.
- ROADWAYS DESIGNATED AS NOT COUNTY MAINTAINED ROADS AS SHOWN ON THE PLAN WILL NOT BE ELIGIBLE FOR COUNTY MAINTENANCE UNTIL THE ROADWAYS ARE IMPROVED (AT NO COST TO THE COUNTY) TO THE PUBLIC MAINTENANCE ROAD STANDARDS APPROVED BY THE BOARD OF SUPERVISORS AND IN EFFECT AT SUCH TIME THAT THE ROADWAYS ARE CONSIDERED FOR ACCEPTANCE INTO THE COUNTY'S ROAD SYSTEM.
- ALL WORK IN THE COUNTY ROAD RIGHT-OF-WAY REQUIRES AN ENCROACHMENT PERMIT FROM THE SANTA CLARA COUNTY DEPARTMENT. EACH INDIVIDUAL ACTIVITY REQUIRES A SEPARATE PERMIT - I.E. CABLE, ELECTRICAL, GAS, SEWER, WATER, RETAINING WALLS, DRIVEWAY APPROACHES, FENCES, LANDSCAPING, TREE REMOVAL, STORM DRAINAGE IMPROVEMENTS, ETC.

STREET LIGHTING

- PACIFIC GAS & ELECTRIC ELECTROLER SERVICE FEE SHALL BE PAID BY THE DEVELOPER AND/OR HIS AUTHORIZED REPRESENTATIVE.

SANITARY SEWER

- THE SANITARY SEWER AND WATER UTILITIES SHOWN ON THESE PLANS ARE NOT PART OF THIS GRADING PERMIT AND ARE SHOWN FOR REFERENCE ONLY.
- ALL MATERIALS AND METHODS OF CONSTRUCTION OF SANITARY SEWERS SHALL CONFORM TO THE SPECIFICATIONS OF THE JURISDICTION INVOLVED. INSPECTION OF SANITARY SEWER WORK SHALL BE DONE BY SAID JURISDICTION.

PORTLAND CEMENT CONCRETE

- CONCRETE USED FOR STRUCTURAL PURPOSES SHALL BE CLASS "A" (6 SACK PER CUBIC YARD) AS SPECIFIED IN THE STATE STANDARD SPECIFICATIONS. CONCRETE PLACED MUST DEVELOP A MINIMUM STRENGTH FACTOR OF 2800 PSI IN A SEVEN-DAY PERIOD. THE CONCRETE MIX DESIGN SHALL BE UNDER THE CONTINUAL CONTROL OF THE COUNTY INSPECTOR.

AIR QUALITY, LANDSCAPING AND EROSION CONTROL

- WATER ALL ACTIVE CONSTRUCTION AREAS AT LEAST TWICE DAILY.
- COVER ALL TRUCKS HAULING SOIL, SAND, AND OTHER LOOSE MATERIALS OR REQUIRE ALL TRUCKS TO MAINTAIN AT LEAST TWO FEET OF FREEBOARD.
- PAVE, APPLY WATER THREE TIMES DAILY, OR APPLY (NON-TOXIC) SOIL STABILIZER ON UNPAVED ACCESS ROADS, PARKING AREAS AND STAGING AREAS AT CONSTRUCTION SITES.
- SWEEP DAILY (WITH WATER SWEEPERS) ALL PAVED ACCESS ROADS, PARKING AREAS AND STAGING AREAS AT CONSTRUCTION SITES. THE USE OF DRY POWDER SWEEPING IS PROHIBITED.
- SWEEP STREETS DAILY (WITH WATER SWEEPERS) IF VISIBLE SOIL MATERIAL IS CARRIED ONTO ADJACENT PUBLIC STREETS. THE USE OF DRY POWDER SWEEPING IS PROHIBITED.
- ALL CONSTRUCTION VEHICLES, EQUIPMENT AND DELIVERY TRUCKS SHALL HAVE A MAXIMUM IDLING TIME OF 5 MINUTES (AS REQUIRED BY THE CALIFORNIA AIRBORNE TOXIC CONTROL MEASURE TITLE 13, SECTION 2485 OF CALIFORNIA CODE OF REGULATIONS (CCR)). ENGINES SHALL BE SHUT OFF IF CONSTRUCTION REQUIRES LONGER IDLING TIME UNLESS NECESSARY FOR PROPER OPERATION OF THE VEHICLE.
- ALL VEHICLE SPEEDS ON UNPAVED ROADS SHALL BE LIMITED TO 15 MILES PER HOUR.
- ALL CONSTRUCTION EQUIPMENT SHALL BE MAINTAINED AND PROPERLY TUNED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS. ALL EQUIPMENT SHALL BE CHECKED BY A CERTIFIED MECHANIC AND DETERMINED TO BE RUNNING IN PROPER CONDITION PRIOR TO OPERATION.
- POST A SIGN THAT IS AT LEAST 32 SQUARE FEET MINIMUM 2 INCHES LETTER HEIGHT VISIBLE FROM THE ENTRANCE TO CONSTRUCTION SITE THAT IDENTIFIES THE FOLLOWING REQUIREMENTS. OBTAIN ENCROACHMENT PERMIT FOR SIGN FROM ROADS DEPARTMENT OR OTHER APPLICABLE AGENCY IF REQUIRED.
 - 15 MILES PER HOUR (MPH) SPEED LIMIT
 - 5 MINUTE MAXIMUM IDLING TIME OF VEHICLES
 - TELEPHONE NUMBER TO CONTACT THE BAY AREA AIR QUALITY MANAGEMENT DISTRICT REGARDING DUST COMPLAINTS. NOTE PHONE NUMBER OF THE BAY AREA AIR QUALITY MANAGEMENT DISTRICT AIR POLLUTION COMPLIANCE OFFICE OF 1-800-334-6367.
- ALL FILL SLOPES SHALL BE COMPACTED AND LEFT IN A SMOOTH AND FIRM CONDITION CAPABLE OF WITHSTANDING WEATHERING.
- ALL EXPOSED DISTURBED AREAS SHALL BE SEEDED WITH BROME SEED SPREAD AT THE RATE OF 5 LB. PER 1000 SQUARE FEET (OR APPROVED EQUAL). SEEDING AND WATERING SHALL BE MAINTAINED AS REQUIRED TO ENSURE GROWTH.
- ALL DITCHES SHALL BE LINED PER COUNTY STANDARD SDB.
- ALL STORM DRAINAGE STRUCTURES SHALL BE INSTALLED WITH EFFECTIVE ENTRANCE & OUTFALL EROSION CONTROLS E.G. SACKED CONCRETE RIP-RAP. ENERGY DISSIPATORS SHALL BE INSTALLED AT ALL DITCH OUTFALLS. WHERE OUTFALLS ARE NOT INTO AN EXISTING CREEK OR WATER COURSE, RUNOFF SHALL BE RELEASED TO SHEET FLOW.
- PRIOR TO GRADING COMPLETION AND RELEASE OF THE BOND, ALL GRADED AREAS SHALL BE RESEEDED IN CONFORMANCE WITH THE COUNTY GRADING ORDINANCE TO MINIMIZE THE VISUAL IMPACTS OF THE GRADE SLOPES AND REDUCE THE POTENTIAL FOR EROSION OF THE SUBJECT SITE.
- PERMANENT LANDSCAPING SHOWN ON THE ATTACHED LANDSCAPE PLAN MUST BE INSTALLED AND FIELD APPROVED BY THE COUNTY PLANNING OFFICE PRIOR TO FINAL APPROVAL BY THE COUNTY ENGINEER, AND FINAL OCCUPANCY RELEASE BY THE BUILDING INSPECTION OFFICE.
- THE OWNER SHALL PREPARE AND PRESENT A WINTERIZATION REPORT TO THE COUNTY INSPECTOR FOR REVIEW PRIOR TO OCTOBER 15TH OF EVERY YEAR.
- THE OWNER, CONTRACTOR, AND ANY PERSON PERFORMING CONSTRUCTION ACTIVITIES SHALL INSTALL AND MAINTAIN CONSTRUCTION BEST MANAGEMENT PRACTICES (BMPs) ON THE PROJECT SITE AND WITHIN THE SANTA CLARA COUNTY ROAD RIGHT-OF-WAY THROUGHOUT THE DURATION OF THE CONSTRUCTION AND UNTIL THE ESTABLISHMENT OF PERMANENT STABILIZATION AND SEDIMENT CONTROL TO PREVENT THE DISCHARGE OF POLLUTANTS INCLUDING SEDIMENT, CONSTRUCTION MATERIALS, EXCAVATED MATERIALS, AND WASTE INTO THE SANTA CLARA COUNTY RIGHT-OF-WAY, STORM SEWER WATERWAYS, ROADWAY INFRASTRUCTURE. BMPs SHALL INCLUDE, BUT NOT BE LIMITED TO THE FOLLOWING:
 - PREVENTION OF POLLUTANTS IN STORM WATER DISCHARGES FROM THE CONSTRUCTION SITE AND THE CONTRACTOR'S MATERIAL AND EQUIPMENT LAYDOWN / STAGING AREAS.
 - PREVENTION OF TRACKING OF DIRT AND CONSTRUCTION MATERIALS ONTO THE PUBLIC ROAD RIGHT-OF-WAY.
 - WEATHER CONDITIONS ONTO THE PUBLIC ROAD RIGHT-OF-WAY.
- THE OWNER, CONTRACTOR, AND ANY PERSON PERFORMING CONSTRUCTION ACTIVITIES SHALL ENSURE THAT ALL TEMPORARY CONSTRUCTION FACILITIES, INCLUDING BUT NOT LIMITED TO CONSTRUCTION MATERIALS, DELIVERIES, HAZARDOUS AND NON-HAZARDOUS MATERIAL STORAGE, EQUIPMENT, TOOLS, PORTABLE TOILETS, CONCRETE WASHOUT, GARBAGE CONTAINERS, LAYDOWN YARDS, SECONDARY CONTAINMENT AREAS, ETC. ARE LOCATED OUTSIDE THE SANTA CLARA COUNTY ROAD RIGHT-OF-WAY.
- EROSION CONTROL PLAN IS A GUIDE AND SHALL BE AMENDED AS NECESSARY TO PREVENT EROSION AND ILLUOT DISCHARGES ON A YEAR AROUND BASIS, DEPENDING ON THE SEASON, WEATHER, AND FIELD CONDITIONS. EROSION CONTROL MEASURES IN ADDITION TO THOSE NOTED IN THE PERMITTED PLANS MAY BE NECESSARY. FAILURE TO INSTALL SITE AND SITUATIONALLY APPROPRIATE EROSION CONTROL MEASURES MAY RESULT IN VIOLATIONS, FINES, AND A STOPPAGE OF WORK.

SURVEY MONUMENT PRESERVATION

- PRIOR TO THE COMMENCEMENT OF ANY GRADING, TREE PROTECTIVE FENCING SHALL BE IN PLACE IN ACCORDANCE WITH THE TREE PRESERVATION PLAN AND INSPECTED BY A CERTIFIED ARBORIST. THE ARBORIST SHALL MONITOR CONSTRUCTION ACTIVITY TO ENSURE THAT THE TREE PROTECTION MEASURES ARE IMPLEMENTED AND ADHERED TO DURING CONSTRUCTION. THIS CONDITION SHALL BE INCORPORATED INTO THE GRADING PLANS.
- FENCE SHALL BE MINIMUM 5 FEET TALL CONSTRUCTED OF STURDY MATERIAL (CHAIN-LINK OR EQUIVALENT STRENGTH/DURABILITY).
- FENCE SHALL BE SUPPORTED BY VERTICAL POSTS DRIVEN 2 FEET (MIN) INTO THE GROUND AND SPACED NOT MORE THAN 10 FEET APART.
- TREE FENCING SHALL BE MAINTAINED THROUGHOUT THE SITE DURING THE CONSTRUCTION PERIOD, INSPECTED PERIODICALLY FOR DAMAGE AND PROPER FUNCTION. REPAIRED AS NECESSARY TO PROVIDE A PHYSICAL BARRIER FROM CONSTRUCTION ACTIVITIES, AND REMAIN IN PLACE UNTIL THE FINAL INSPECTION.
- A SIGN THAT INCLUDES THE WORDS, "WARNING: THIS FENCE SHALL NOT BE REMOVED WITHOUT THE EXPRESSED PERMISSION OF THE SANTA CLARA COUNTY PLANNING OFFICE," SHALL BE SECURELY ATTACHED TO THE FENCE IN A VISUALLY PROMINENT LOCATION.

STORM DRAINAGE AND STORMWATER MANAGEMENT

- DEVELOPER IS RESPONSIBLE FOR ALL NECESSARY DRAINAGE FACILITIES WHETHER SHOWN ON THE PLANS OR NOT AND HE OR HIS SUCCESSOR PROPERTY OWNERS ARE RESPONSIBLE FOR ADEQUACY AND CONTINUED MAINTENANCE OF THESE FACILITIES IN A MANNER WHICH WILL PRECLUDE ANY HAZARD TO LIFE, HEALTH, OR DAMAGE TO ADJOINING PROPERTY, CONSISTENT WITH NPDES PERMIT CAS612008 / ORDER NO. R2-2022-0018 AND NPDES PERMIT CAS000004 / ORDER NO. 2013-001-DWG.
- DROP INLETS SHALL BE COUNTY STANDARD TYPE 5 UNLESS OTHERWISE NOTED ON THE PLANS. THE DEVELOPER'S ENGINEER SHALL BE RESPONSIBLE FOR THE PROPER LOCATION OF DROP INLETS. WHERE STREET PROFILE GRADE EXCEEDS 6% DROP INLETS SHALL BE SET AT 500 ANGLE CURB LINE TO ACCEPT WATER OR AS SHOWN ON THE PLANS.
- WHERE CULVERTS ARE INSTALLED THE DEVELOPER SHALL BE RESPONSIBLE FOR GRADING THE OUTLET DITCH TO DRAIN TO AN EXISTING SWALE OR TO AN OPEN AREA FOR SHEET FLOW.
- UPON INSTALLATION OF DRIVEWAY CONNECTIONS, PROPERTY OWNERS SHALL PROVIDE FOR THE UNINTERRUPTED FLOW OF WATER IN ROADSIDE DITCHES.
- THE COUNTY SHALL INSPECT UNDERGROUND DRAINAGE IMPROVEMENTS AND STORMWATER MANAGEMENT FEATURES PRIOR TO BACKFILL.

AS-BUILT PLANS STATEMENT

THIS IS A TRUE COPY OF THE AS-BUILT PLANS. THERE (____) WERE (____) WERE (____) NOT MINOR FIELD CHANGES - MARKED WITH THE SYMBOL (Δ). THERE (____) WERE (____) WERE (____) NOT PLAN REVISIONS INDICATING SIGNIFICANT CHANGES REVIEWED BY THE COUNTY ENGINEER AND MARKED WITH THE SYMBOL Δ.


DATE _____ SIGNATURE _____

NOTE: THIS STATEMENT IS TO BE SIGNED BY THE PERSON AUTHORIZED BY THE COUNTY ENGINEER TO PERFORM THE INSPECTION WORK. A REPRODUCIBLE COPY OF THE AS-BUILT PLANS MUST BE FURNISHED TO THE COUNTY ENGINEER AFTER CONSTRUCTION.


GEOTECHNICAL ENGINEER OBSERVATION

- A CONSTRUCTION OBSERVATION LETTER FROM THE RESPONSIBLE GEOTECHNICAL ENGINEER AND ENGINEERING GEOLOGIST DETAILING CONSTRUCTION OBSERVATIONS AND CERTIFYING THAT THE WORK WAS DONE IN ACCORDANCE WITH THE RECOMMENDATIONS IN THE GEOTECHNICAL AND GEOLOGIC REPORTS SHALL BE SUBMITTED PRIOR TO THE GRADING COMPLETION AND RELEASE OF THE BOND.


DATE _____ SIGNATURE _____
 COUNTY ENGINEER'S NOTE
 ISSUANCE OF A PERMIT AUTHORIZING CONSTRUCTION DOES NOT RELEASE THE DEVELOPER, PERMITTEE OR ENGINEER FROM RESPONSIBILITY FOR THE CORRECTION OF ERRORS OR OMISSIONS CONTAINED IN THE PLANS. IF, DURING THE COURSE OF CONSTRUCTION, THE PUBLIC INTEREST REQUIRES A MODIFICATION OF (OR DEPARTURE FROM) THE SPECIFICATIONS OF THE PLANS, THE COUNTY SHALL HAVE THE AUTHORITY TO REQUIRE THE SUSPENSION OF WORK, AND THE NECESSARY MODIFICATION OR DEPARTURE AND TO SPECIFY THE MANNER IN WHICH THE SAME IS TO BE MADE.

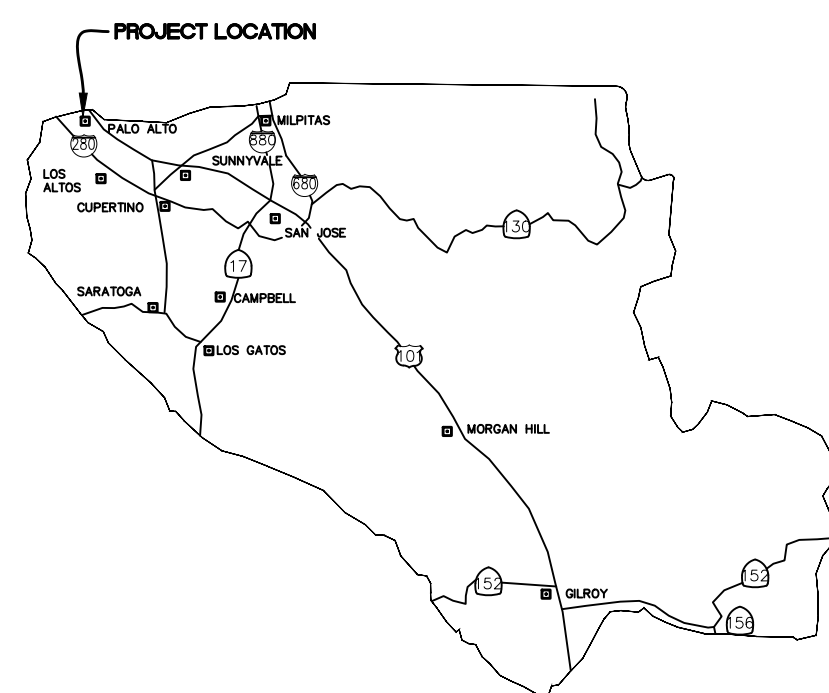

COUNTY LOCATION MAP

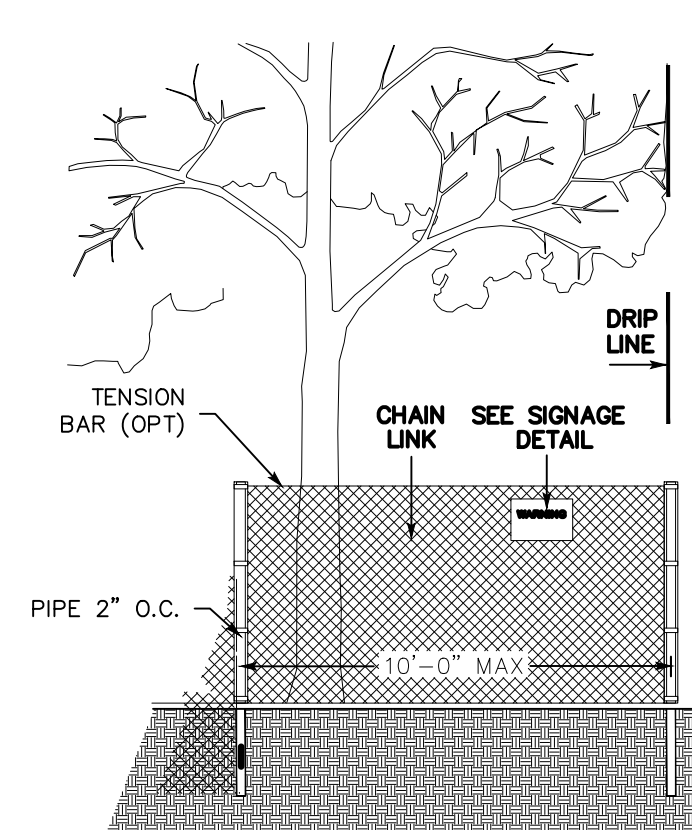

EXISTING TREE PROTECTION DETAILS

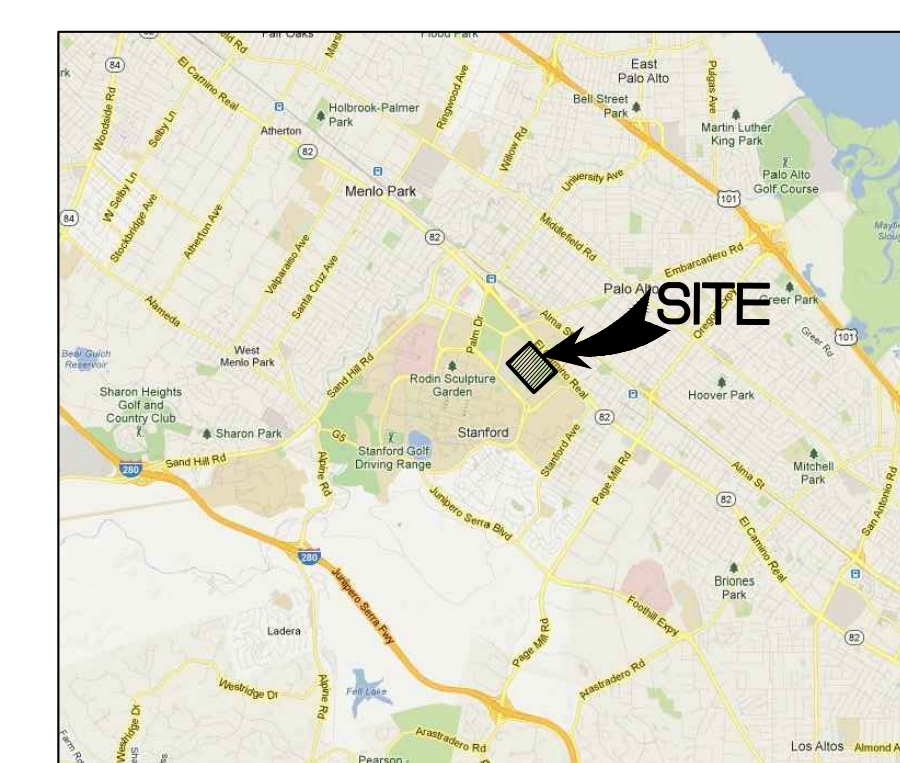

VICINITY MAP NOT TO SCALE

SCOPE OF WORK

REPLACEMENT OF EXISTING TURF FIELD AND IMPROVEMENTS TO THE FIELD DRAINAGE AND IRRIGATION SYSTEM.

SHEET INDEX

C-1.0	COUNTY COVER SHEET
C-1.1	CONSTRUCTION NOTES
C-2.0	TOPOGRAPHIC SURVEY
C-3.0	DEMOLITION PLAN
C-3.1	DEMOLITION NOTES
C-4.0	GRADING AND DRAINAGE PLAN
C-4.1	GRADING SECTION
C-5.0	UTILITY PLAN
C-6.0	STORMWATER MANAGEMENT PLAN
C-7.0	EROSION CONTROL PLAN
C-7.1	EROSION CONTROL DETAILS
C-7.2	EROSION CONTROL DETAILS
C-8.0	CONSTRUCTION SITE LOGISTICS AND SAFETY PLAN
C-9.0	CONSTRUCTION DETAILS

ENGINEER'S NAME: NATE DICKINSON
 ADDRESS: 1700 S. WINCHESTER BLVD. CAMPBELL, CA 95008
 PHONE NO. 408-636-0900
 FAX NO. 408-636-0900

Revision 1	Date	APN	142-04-36	Sheet
Revision 2	Date	Co. File		C-1.0
Revision 3	Date			14

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.

ABBREVIATIONS

AB	-	AGGREGATE BASE
AC	-	ASPHALT CONCRETE
AD	-	AREA DRAIN
ADA	-	AMERICANS WITH DISABILITIES ACT
ASB	-	AGGREGATE SUBBASE
BC	-	BEGINNING OF CURVE
BFP	-	BACK FLOW PREVENTOR
BLDC	-	BUILDING CORNER
BLDG	-	BUILDING
BOD	-	BOTTOM OF DOCK
BOL	-	BOLLARD
BOS	-	BOTTOM OF STEP
BOW	-	FG @ BOTTOM OF WALL
BVC	-	BEGIN VERTICAL CURVE
BW	-	BACK OF WALK
C	-	CONCRETE OR CIVIL
C&G	-	CURB AND GUTTER
CB	-	CATCH BASIN
CI	-	COMBINATION INLET
CIP	-	CAST IRON PIPE
CL	-	CENTER LINE OR CLASS
CMP	-	CORRUGATED METAL PIPE
CO	-	CLEANOUT
COI	-	CURB OPENING INLET
CONC	-	CONCRETE
CONST	-	CONSTRUCTION OR CONSTRUCT
CY	-	CUBIC YARD
DDDA	-	DOUBLE CHECK DETECTOR ASSEMBLY
DI	-	DROP INLET
DIP	-	DUCTILE IRON PIPE
DOM	-	DOMESTIC
DW	-	DOMESTIC WATER
DWG	-	DRAWING
E	-	EAST
EC	-	END OF CURVE
EP	-	EDGE OF PAVEMENT
ER	-	END OF RETURN
EVC	-	END VERTICAL CURVE
ELEV	-	ELEVATION
EX, EXIST.	-	EXISTING
FC	-	FACE OF CURB
FDC	-	FIRE DEPARTMENT CONNECTION
FF	-	FINISHED FLOOR
FG	-	FINISHED GRADE
FH	-	FIRE HYDRANT
FL	-	FLOW LINE
FOUND	-	FOUNDATION
FS	-	FINISHED SURFACE
FT	-	FOOT
FW	-	FIRE WATER
G	-	GROUND ELEVATION
GB	-	GRADE BREAK
GV	-	GATE VALVE
HCR	-	ACCESSIBLE RAMP
HP	-	HIGH POINT
INV	-	INVERT ELEVATION
JP	-	JOINT POLE
JT	-	JOINT TRENCH
LIP	-	LIP OF GUTTER
LP	-	LOW POINT
LSA	-	LANDSCAPE ARCHITECT
MAX	-	MAXIMUM
MEP	-	MECHANICAL/ELECTRICAL/PLUMBING
MH	-	MANHOLE
MIN	-	MINIMUM
MPVC	-	MIDPOINT OF VERTICAL CURVE
MON	-	MONUMENT
N	-	NORTH
N.I.C.	-	NOT IN CONTRACT
NO	-	NUMBER
NTS	-	NOT TO SCALE
P	-	PAVEMENT ELEVATION
PCC	-	PORTLAND CEMENT CONCRETE / POINT OF CONTINUOUS CURVATURE
PIV	-	POST INDICATOR VALVE
PL	-	PROPERTY LINE
PMH	-	POWER MANHOLE
POC	-	POINT ON CURVE
PP	-	POWER POLE
PRC	-	POINT OF REVERSE CURVATURE
PVC	-	POLYVINYL CHLORIDE PIPE
R	-	RADIUS
RC	-	RELATIVE COMPACTION
RCP	-	REINFORCED CONCRETE PIPE
RPPA	-	REDUCED PRESSURE PRINCIPLE ASSEMBLY
R/W	-	RIGHT OF WAY
S	-	SLOPE OR SOUTH
S.A.D.	-	SEE ARCHITECTURAL DRAWINGS
SB	-	SEDIMENT BASIN
SD	-	STORM DRAIN
S.E.D.	-	SEE ELECTRICAL DRAWINGS
SF	-	SILT FENCE
SG	-	SUBGRADE
S.L.D.	-	SEE LANDSCAPE DRAWINGS
S.M.D.	-	SEE MECHANICAL DRAWINGS
SMH	-	SIGNAL MANHOLE
S.P.D.	-	SEE PLUMBING DRAWINGS
SS	-	SANITARY SEWER
STA	-	STATION
STD	-	STANDARD
S/W	-	SIDEWALK
TC	-	TOP OF CURB
TD	-	TRENCH DRAIN
TOD	-	TOP OF DOCK
TOE	-	TOE OF SLOPE
TOS	-	TOP OF STAIR
TOW	-	FG @ TOP OF WALL
TS	-	TOP OF SLAB
TYP	-	TYPICAL
UNLESS OTHERWISE NOTED	-	UNLESS OTHERWISE NOTED
U/G	-	UNDERGROUND
VC	-	VERTICAL CURVE
WM	-	WATER METER
WV	-	WATER VALVE
W	-	WEST
WWF	-	WELDED WIRE FABRIC
W/	-	WITH

LEGEND

SAWCUT AND CONFORM LINE	---
RETAINING WALL	=====
A.C. PAVEMENT	=====
CONC. VALLEY GUTTER	=====
CONC. SIDEWALK OR PAD	=====
6" CURB & GUTTER	=====
EDGE OF A.C. PAVEMENT	EP
6" VERTICAL CURB	=====
CENTER LINE	---
SANITARY SEWER MAIN	8" SS
STORM DRAIN MAIN	12" SD
PERFORATED PIPE	6" SD
WATER MAIN	6" W
FIRE WATER MAIN	6" FW
DOMESTIC WATER MAIN	6" DW
CHILLED WATER MAIN	6" CHW
IRRIGATION LINE	2" IRR
HOT WATER SUPPLY & RETURN	HWS-HWR
STEAM LINE	ST
TRENCH DRAIN	=====
CONDENSATE RETURN	CR
FLOW LINE	---
CHAIN LINK FENCE	x x x x
GAS MAIN	G
ELECTRIC AND SIGNAL DUCT BANK	E
OVERHEAD ELECTRIC LINE	OHE
UNDERGROUND ELECTRIC LINE	UGE
STREET LIGHT CONDUIT	SL
CONTOUR ELEVATION LINE	85
SPOT ELEVATION	x 95.94
DIRECTION OF SLOPE	2:1 1%
GAS METER	GM
GAS VALVE	GV
WATER METER	WM
WATER VALVE	WV
FIRE HYDRANT	FH
BACK FLOW PREVENTOR	BFP
POST INDICATOR VALVE	PIV
FIRE DEPARTMENT CONNECTION	FDC
WATER LINE TEE	WT
CAP AND PLUG END	CP
AIR RELEASE VALVE	ARV
SIGN	S
ACCESSIBLE RAMP	AR
CONCRETE THRUST BLOCK	CTB
REDUCER	R
SANITARY SEWER MANHOLE	SSMH
SANITARY SEWER CLEANOUT	SSCO
STORM DRAIN MANHOLE	SDMH
STORM DRAIN AREA DRAIN	SDAD
STORM DRAIN CATCH BASIN	SDCB
STORM DRAIN CURB INLET	SDCI
STORM DRAIN CLEANOUT	SDCO
ELECTROLIER	EL
JOINT POLE	JP
OVERLAND RELEASE	OR
CONSTRUCTION DETAIL REFERENCE	15 C5.2

EXISTING

PROPOSED

TREE PROTECTION NOTES

- THE GENERAL CONTRACTOR SHALL TAKE THE FOLLOWING STEPS TO PRESERVE AND PROTECT ALL EXISTING TREES SHOWN TO REMAIN:
 - PRIOR TO COMMENCEMENT OF DEMOLITION, GRADING AND CONSTRUCTION, TEMPORARY FENCING SHALL BE INSTALLED AT THE DRIP LINE OF EACH TREE TO BE PRESERVED. REFER TO DETAIL, FENCED AREAS SHALL NOT BE VIOLATED DURING CONSTRUCTION.
 - ALL EXISTING ON-SITE TREES INDICATED TO REMAIN SHALL BE TRIMMED BY A LICENSED ARBORIST FOUR WEEKS PRIOR TO COMMENCEMENT OF GRADING OPERATIONS. ALL BROKEN OR BRUISED BRANCHES AND DEAD WOOD SHALL BE REMOVED. ALL CUTS OVER 1/2" DIAMETER SHALL BE PAINTED WITH "TREE SEAL" OR APPROVED EQUAL. IN NO CASE SHALL ANY TREE BE TOPPED.
 - ALL EXISTING ON-SITE TREES INDICATED TO REMAINS SHALL BE FERTILIZED BY ROOT INJECTION BY A LICENSED ARBORIST FOUR WEEKS PRIOR TO COMMENCEMENT OF GRADING OR DEMOLITION OPERATIONS.
- ALL EXISTING ON-SITE TREES INDICATED TO REMAIN SHALL BE PRESERVED AND PROTECTED DURING CONSTRUCTION. NO GRADING IS PERMITTED WITHIN THE DRIP-LINE OF ANY TREE INDICATED TO REMAIN. NO DEBRIS OR MATERIALS SHALL BE STOCKPILED AROUND THE BASE OF THE TREES. NO TRADESMAN SHALL DUMP DEBRIS OR FLUIDS WITHIN THE DRIP-LINE OF ANY TREES (PLASTER, PAINT, THINNER, ETC.). ALL TREES SHALL BE FENCED BY THE GENERAL CONTRACTOR TO AVOID COMPACTION OF THE TREE'S ROOT SYSTEM AND DAMAGE TO THE BARK. THE FENCE SHALL BE SIX FEET HIGH, AND EXTEND OUT TO THE DRIP-LINE OF THE TREE.
- ALL EXISTING ON-SITE TREES INDICATED TO REMAIN SHALL BE WATERED BY THE GENERAL CONTRACTOR CONTINUOUSLY DURING THE COURSE OF CONSTRUCTION. IF POTABLE WATER IS NOT AVAILABLE ON THE SITE, A WATERING TRUCK SHALL BE EMPLOYED TO ACCOMPLISH THE WATERING.
- DO NOT DISTURB SURFACE SOIL WITHIN TREE DRIP-LINE EXCEPT AS MANDATED BY CONSTRUCTION PLANS.
- DURING PERIODS OF EXTENDED DROUGHT, SPRAY WOAK TREES TO REMOVE ACCUMULATED CONSTRUCTION.
- GRADE IN LINES RADIAL TO THE EXISTING TREE RATHER THAN TANGENTIAL. IF ROOTS ARE ENCOUNTERED WHILE GRADING, CUT THEM CLEANLY WITH A SAW. DO NOT RIP THEM WITH GRADING EQUIPMENT.
- DO NOT ATTEMPT DEMOLITION OF TREES WITH GRADING EQUIPMENT WHEN TREES THAT ARE TO BE PRESERVED ARE IN THE VICINITY.

SURVEY MONUMENT PRESERVATION

- THE LANDOWNER / CONTRACTOR MUST PROTECT AND ENSURE THE PERPETUATION OF SURVEY MONUMENTS AFFECTED BY CONSTRUCTION ACTIVITIES.
- PRIOR TO THE START OF CONSTRUCTION, THE CONTRACTOR SHALL LOCATE, STAKE, AND FLAG OR OTHERWISE IDENTIFY WITH PAINT OR OTHER MARKINGS ALL PERMANENT SURVEY MONUMENTS OF RECORD AND ANY UNRECORDED MONUMENTS THAT ARE DISCOVERED THAT ARE WITHIN 50 FEET OF THE CONSTRUCTION ACTIVITY.
- THE LANDOWNER, CONTRACTOR AND/OR ANY PERSON PERFORMING CONSTRUCTION ACTIVITIES THAT WILL OR MAY DISTURB AN EXISTING MONUMENT, CORNER STAKE, OR ANY OTHER PERMANENT SURVEYED MONUMENT SHALL CAUSE TO HAVE A LICENSED LAND SURVEYOR OR CIVIL ENGINEER, AUTHORIZED TO PRACTICE SURVEYING, ENSURE THAT A CORNER RECORD AND/OR RECORD OF SURVEY ARE FILED WITH THE COUNTY SURVEYOR'S OFFICE PRIOR TO DISTURBING SAID MONUMENTS AND RESET PERMANENT MONUMENT(S) IN THE SURFACE OF THE NEW CONSTRUCTION OR SET A WITNESS MONUMENT(S) TO PERPETUATE THE LOCATION IF ANY PERMANENT MONUMENT COULD BE DESTROYED, DAMAGED, COVERED, DISTURBED, OR OTHERWISE OBLITERATED. THE LICENSED LAND SURVEYOR OR CIVIL ENGINEER SHALL FILE A CORNER RECORD OR RECORD OF SURVEY WITH COUNTY SURVEYOR PRIOR TO FINAL ACCEPTANCE OF THE PROJECT BY THE LAND DEVELOPMENT ENGINEERING INSPECTOR.



BUILD ON.
SANDIS.NET

DATE: 11/27/2023
SCALE: N.T.S.
PROJECT No.: 222518.A

DATE: NOVEMBER 27, 2023
NATHAN DICKINSON
R.C.E. NO. 79716, EXPIRES 9-30-24





No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST

FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT
STANFORD CALIFORNIA

CONSTRUCTION NOTES

SHEET
C-1.1
OF 13 SHEETS

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDS.

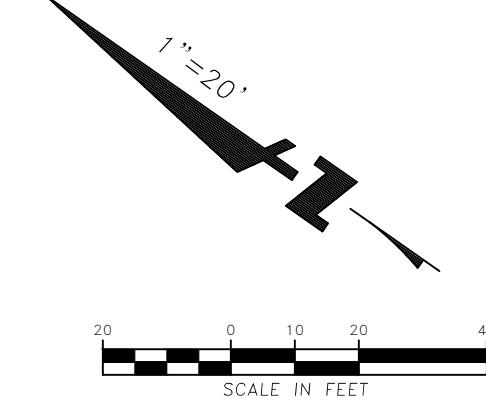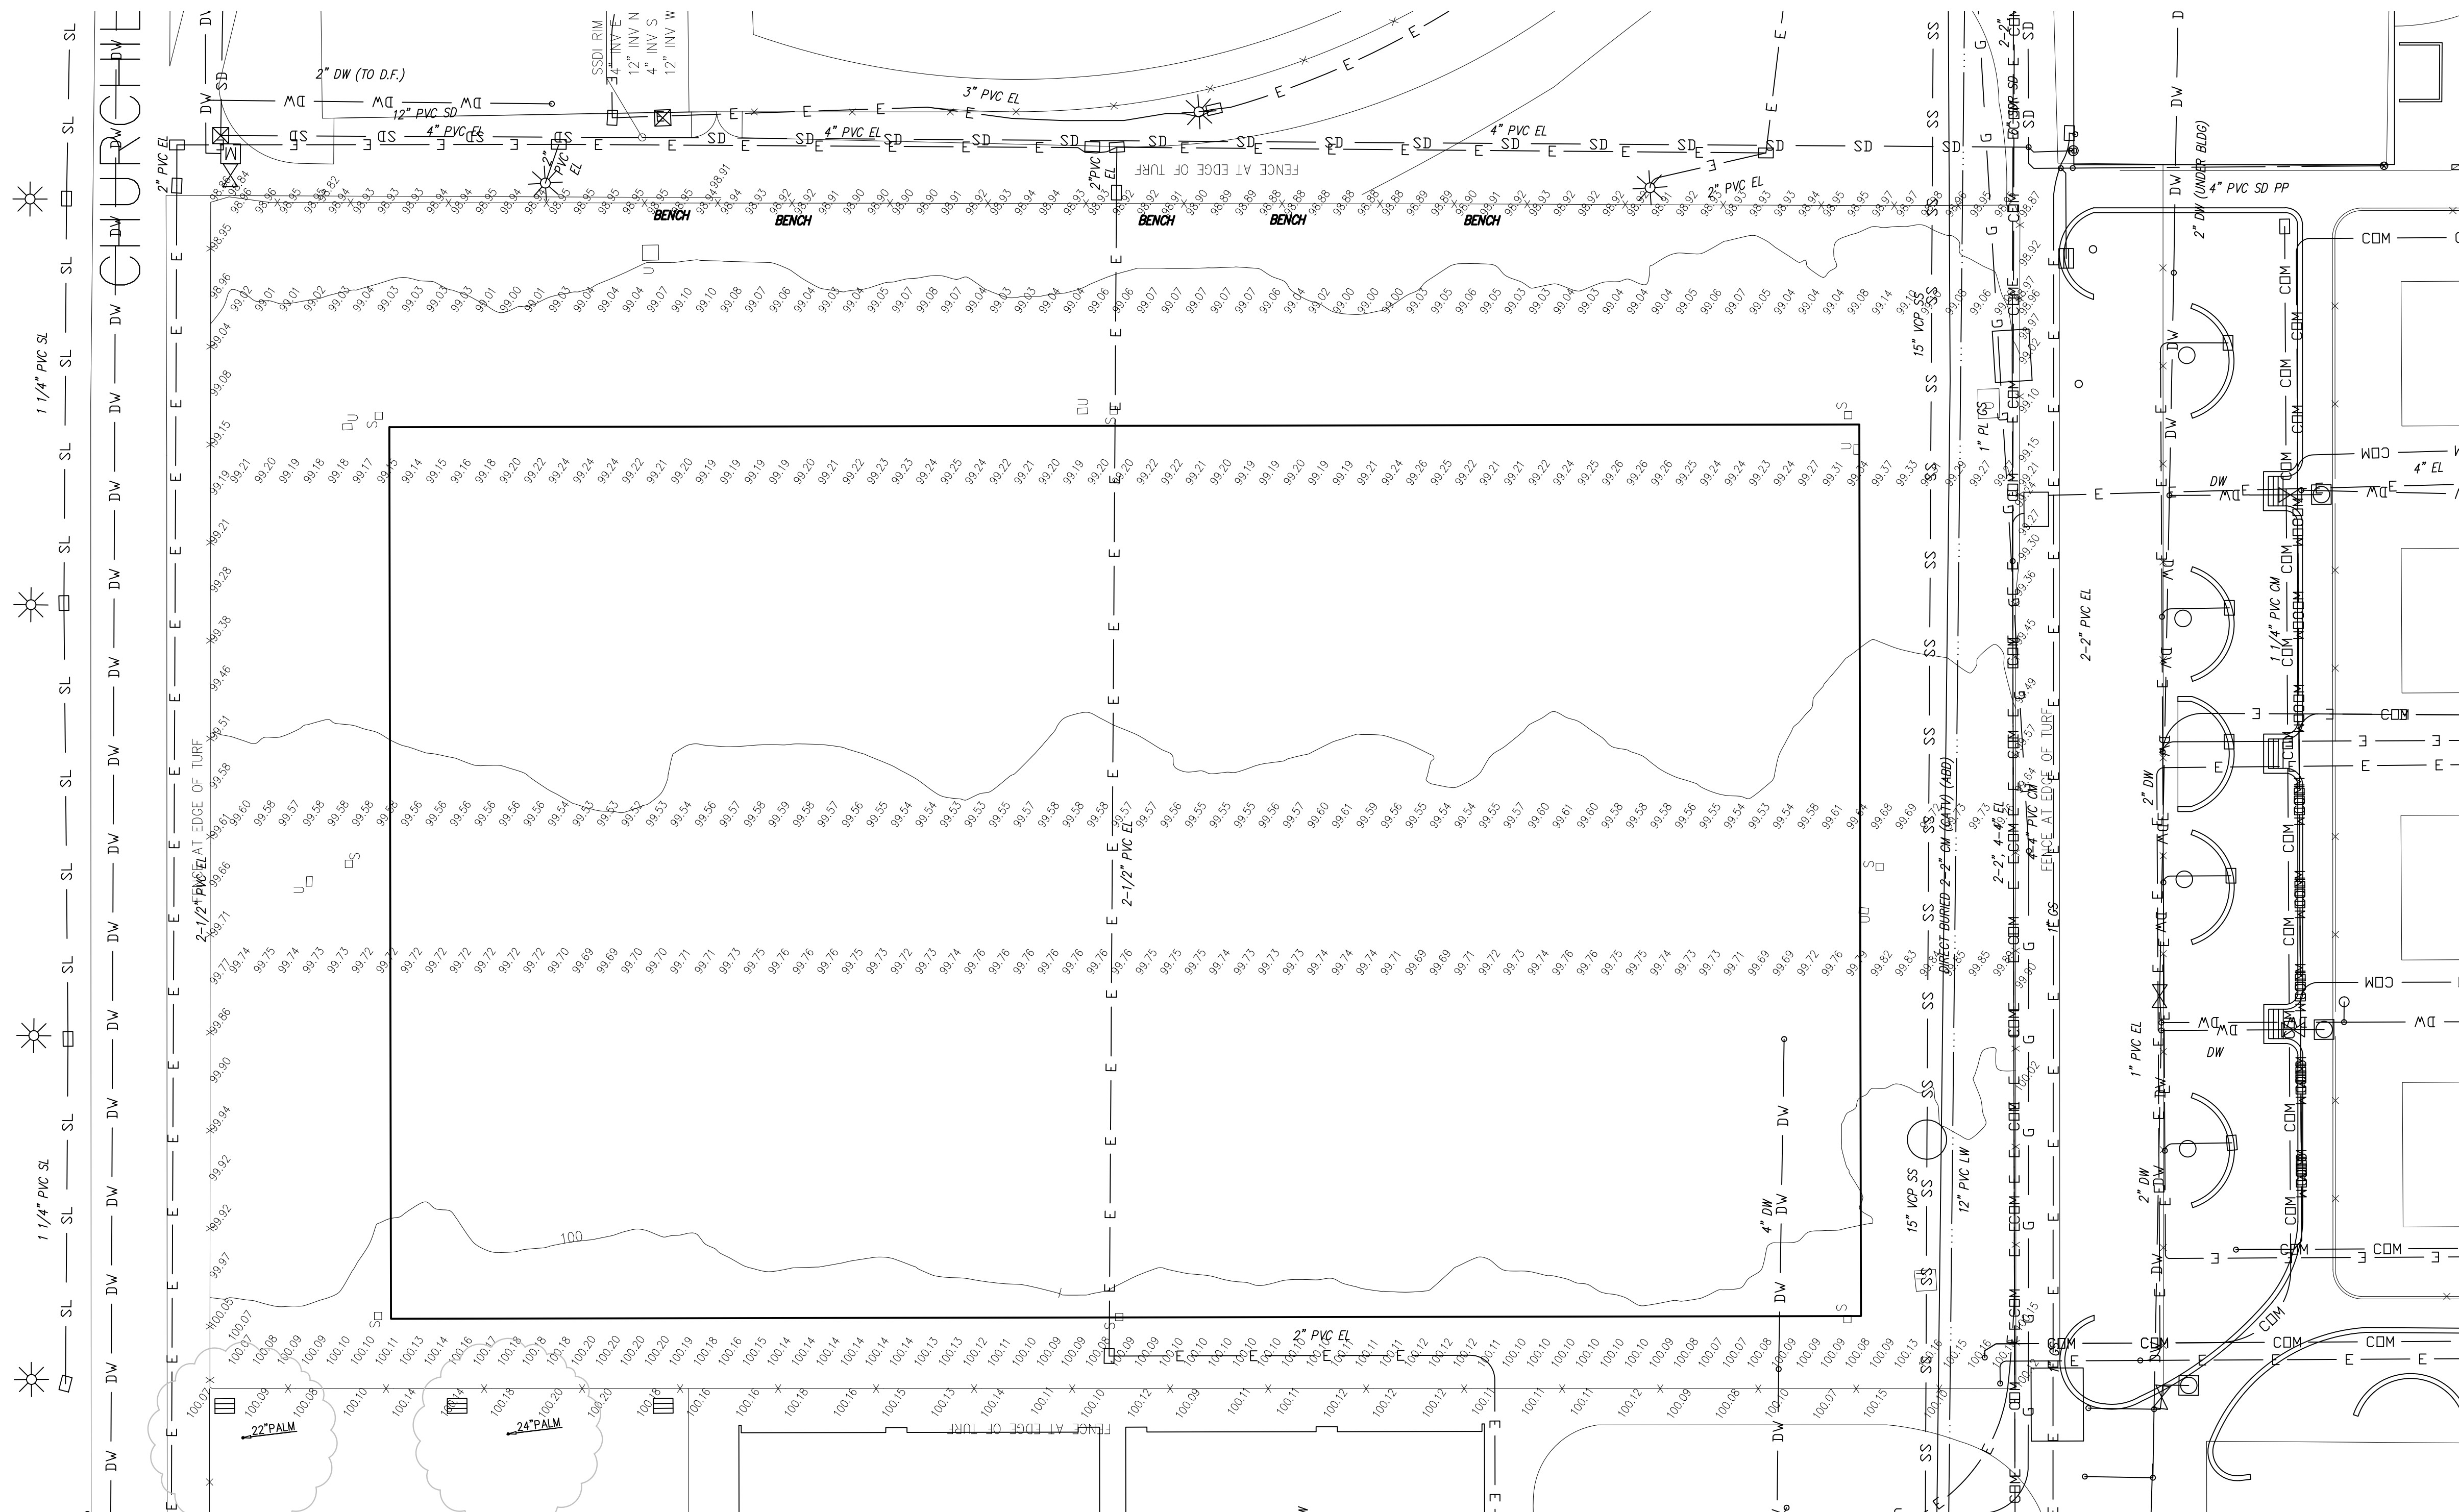

LEGEND

	RIGHT-OF-WAY LINE/LOT LINE
	CENTERLINE
	MONUMENT LINE
	EASEMENT LINE
	BUILDING LINE
	CURB LINE
	FENCE LINE
	DRIP LINE
	GAS LINE
	COMMUNICATION LINE
	OVERHEAD ELECTRIC LINE
	UNDERGROUND ELECTRIC LINE
	WATER LINE
	SANITARY SEWER LINE
	STORM DRAIN LINE
	UNKNOWN UTILITY LINE
	SPOT ELEVATION
	1'-CONTOURS

SYMBOLS & ABBREVIATIONS

	ACCESSIBLE RAMP		MISCELLANEOUS CLEANOUT
	AREA DRAIN		MISCELLANEOUS MANHOLE
	ANODE		MISCELLANEOUS PULLBOX
	BACK FLOW PREVENTER		MISCELLANEOUS VALVE
	BIKE RACK		MISCELLANEOUS VAULT
	BUILDING CORNER		MAILBOX
	BUILDING LINE		M-WELL
	BUILDING OVERHANG		BUILDING OVERHANG
	BENCHMARK		PAVEMENT
	BENCH		PEDESTAL
	BOLLARD		POST INDICATOR VALVE
	BOTTOM OF WALL		PARKING METER
	BOTTOM OF STAIRS		ELEC PANEL ON TO WALL
	BACK TOP OF ROLLED CURB		POWER POLE
	BACK OF WALK		SECURITY CAMERA
	CABLE TV PULLBOX		STORM DRAIN CLEANOUT
	CABLE TV MANHOLE		STORM DRAIN MANHOLE
	CATCH BASIN-D		SHRUB
	CATCH BASIN		SIGN
	CATCH BASIN-D		SPRINKLER VALVE
	CHAINLINK FENCE		SANITARY CLEANOUT
	TREE CLUSTER		SANITARY MANHOLE
	CONTROL POINT		STREET LIGHT
	CONTAINER		STREET LIGHT PULLBOX
	COLUMN CENTERLINE		STRIPING
	COMMUNICATION MANHOLE		STUMP
	COMMUNICATION PULLBOX		SIDEWALK
	CONCRETE		SWALE
	DECK		TOP OF CURB
	DRAIN INLET		TELEPHONE MANHOLE
	DRIVEWAY		TRENCH DRAIN
	EXISTING GROUND		THRESHOLD
	ELECTRIC MANHOLE		CURB TOP OF AC BERM
	ELECTRIC PULLBOX		TOE OF SLOPE
	EDGE OF PAVEMENT		TOP OF SLOPE
	EDGE OF TRAVELED WAY		TOP OF WALL
	FIRE DEPARTMENT CONNECTION		TRAFFIC SIGNAL
	BUILDING FINISHED FLOOR		TRANSFORMER
	FINISHED GRADE AT DOOR		TREE (SIZE, STEM, TYPE)
	FIRE HYDRANT		TREE TAG #
	FLAG POLE		TOP OF STAIRS
	FLOW LINE		USA CABLE TELEVISION
	FLOWLINE OF PIPE		USA COMMUNICATION
	FENCE		USA ELECTRICAL
	FENCE WIRE		USA GAS
	FOUND IRON PIPE		USA JOINT TRENCH
	FOUND STANDARD MONUMENT		USA NITROGEN
	FOUND REBAR		USA RECLAIMED WATER
	FOUND RAILROAD SPIKE		USA STORM DRAIN
	GATE POLE		USA SANITARY SEWER
	GRADE BREAK		USA STREET LIGHTING
	GAS METER		USA WATER
	GUY WIRE OR POLE		FLOWLINE VALLEY GUTTER
	GAS VALVE		ELEC VAULT
	HOSE BIBB		WOOD FENCE
	ACCESSIBLE SYMBOL		WATER METER
	IRRIGATION CONTROL VALVE		WHITE PAINT MARK
	JUNCTION BOX		WATER PULLBOX
	JOINT POLE		WATER VALVE
	LIP OF GUTTER		EXCEPTION AS PER TITLE REPORT
	LANDSCAPE		RECORD DATA PER REFERENCE MAP

SURVEY NOTES

- EXISTING TOPOGRAPHIC SURVEY INFORMATION SHOWN HEREON IS BASED UPON TOPOGRAPHIC SURVEYS RECEIVED FROM VERDE DESIGN, INC. ON 10/03/2023 PREPARED BY BKF.
- UTILITIES SHOWN ON THIS SURVEY ARE BASED ON SURFACE OBSERVATIONS. NO WARRANTIES ARE EXPRESSED OR IMPLIED CONCERNING THE EXISTENCE, SIZE, DEPTH, CONDITION, CAPACITY, OR LOCATION OR ANY UTILITY EXISTING ON THE SITE, WHETHER PRIVATE, MUNICIPAL, OR PUBLIC OWNED.
- CONTRACTOR SHALL VERIFY ALL UTILITIES PRIOR TO CONSTRUCTION AND REPORT BACK TO CIVIL ENGINEER ANY DISCREPANCIES WITH PLAN PRIOR TO COMMENCEMENT OF WORK.
- TREE LOCATIONS SHOWN HEREON ARE SHOWN SYMBOLICALLY WITH SYMBOL SIZES BASED UPON TRUNK DIAMETER AT CHEST HEIGHT, AT THE LOCATION WHERE THE TREE ENTERS THE GROUND SURFACE. LOCATIONS AND SIZES OF TREE TRUNKS CAN ONLY BE CONSIDERED APPROXIMATE UNLESS OTHERWISE STATED ON THE MAP.

UNDERGROUND UTILITY NOTE

THE TYPES, LOCATIONS, SIZES AND/OR DEPTHS OF EXISTING UNDERGROUND UTILITIES AS SHOWN ON THIS TOPOGRAPHIC SURVEY ARE APPROXIMATE AND WERE OBTAINED FROM SOURCES OF VARYING RELIABILITY. ONLY ACTUAL EXCAVATION WILL REVEAL THE TYPES, EXTENT, SIZES, LOCATIONS AND DEPTHS OF SUCH UNDERGROUND UTILITIES. A REASONABLE EFFORT HAS BEEN MADE TO LOCATE AND DELINEATE ALL KNOWN UNDERGROUND UTILITIES. HOWEVER, THE ENGINEER CAN ASSUME NO RESPONSIBILITY FOR THE COMPLETENESS OR ACCURACY OF ITS DELINEATION OF SUCH UNDERGROUND UTILITIES WHICH MAY BE ENCOUNTERED, BUT WHICH ARE NOT SHOWN ON THIS SURVEY.

DATE: 11/27/2023
SCALE: 1"=20'
PROJECT No.: 222518.A



DATE: NOVEMBER 27, 2023
NATHAN DICKINSON
R.C.E. NO. 79716, EXPIRES 9-30-24

No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST





FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT
STANFORD CALIFORNIA

TOPOGRAPHIC SURVEY
SHEET **C-2.0**

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.

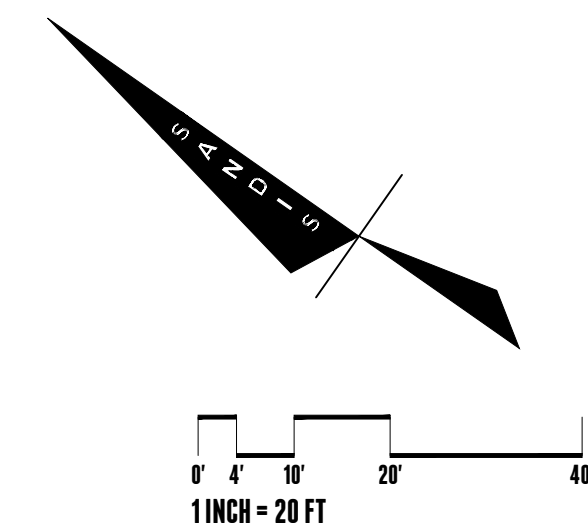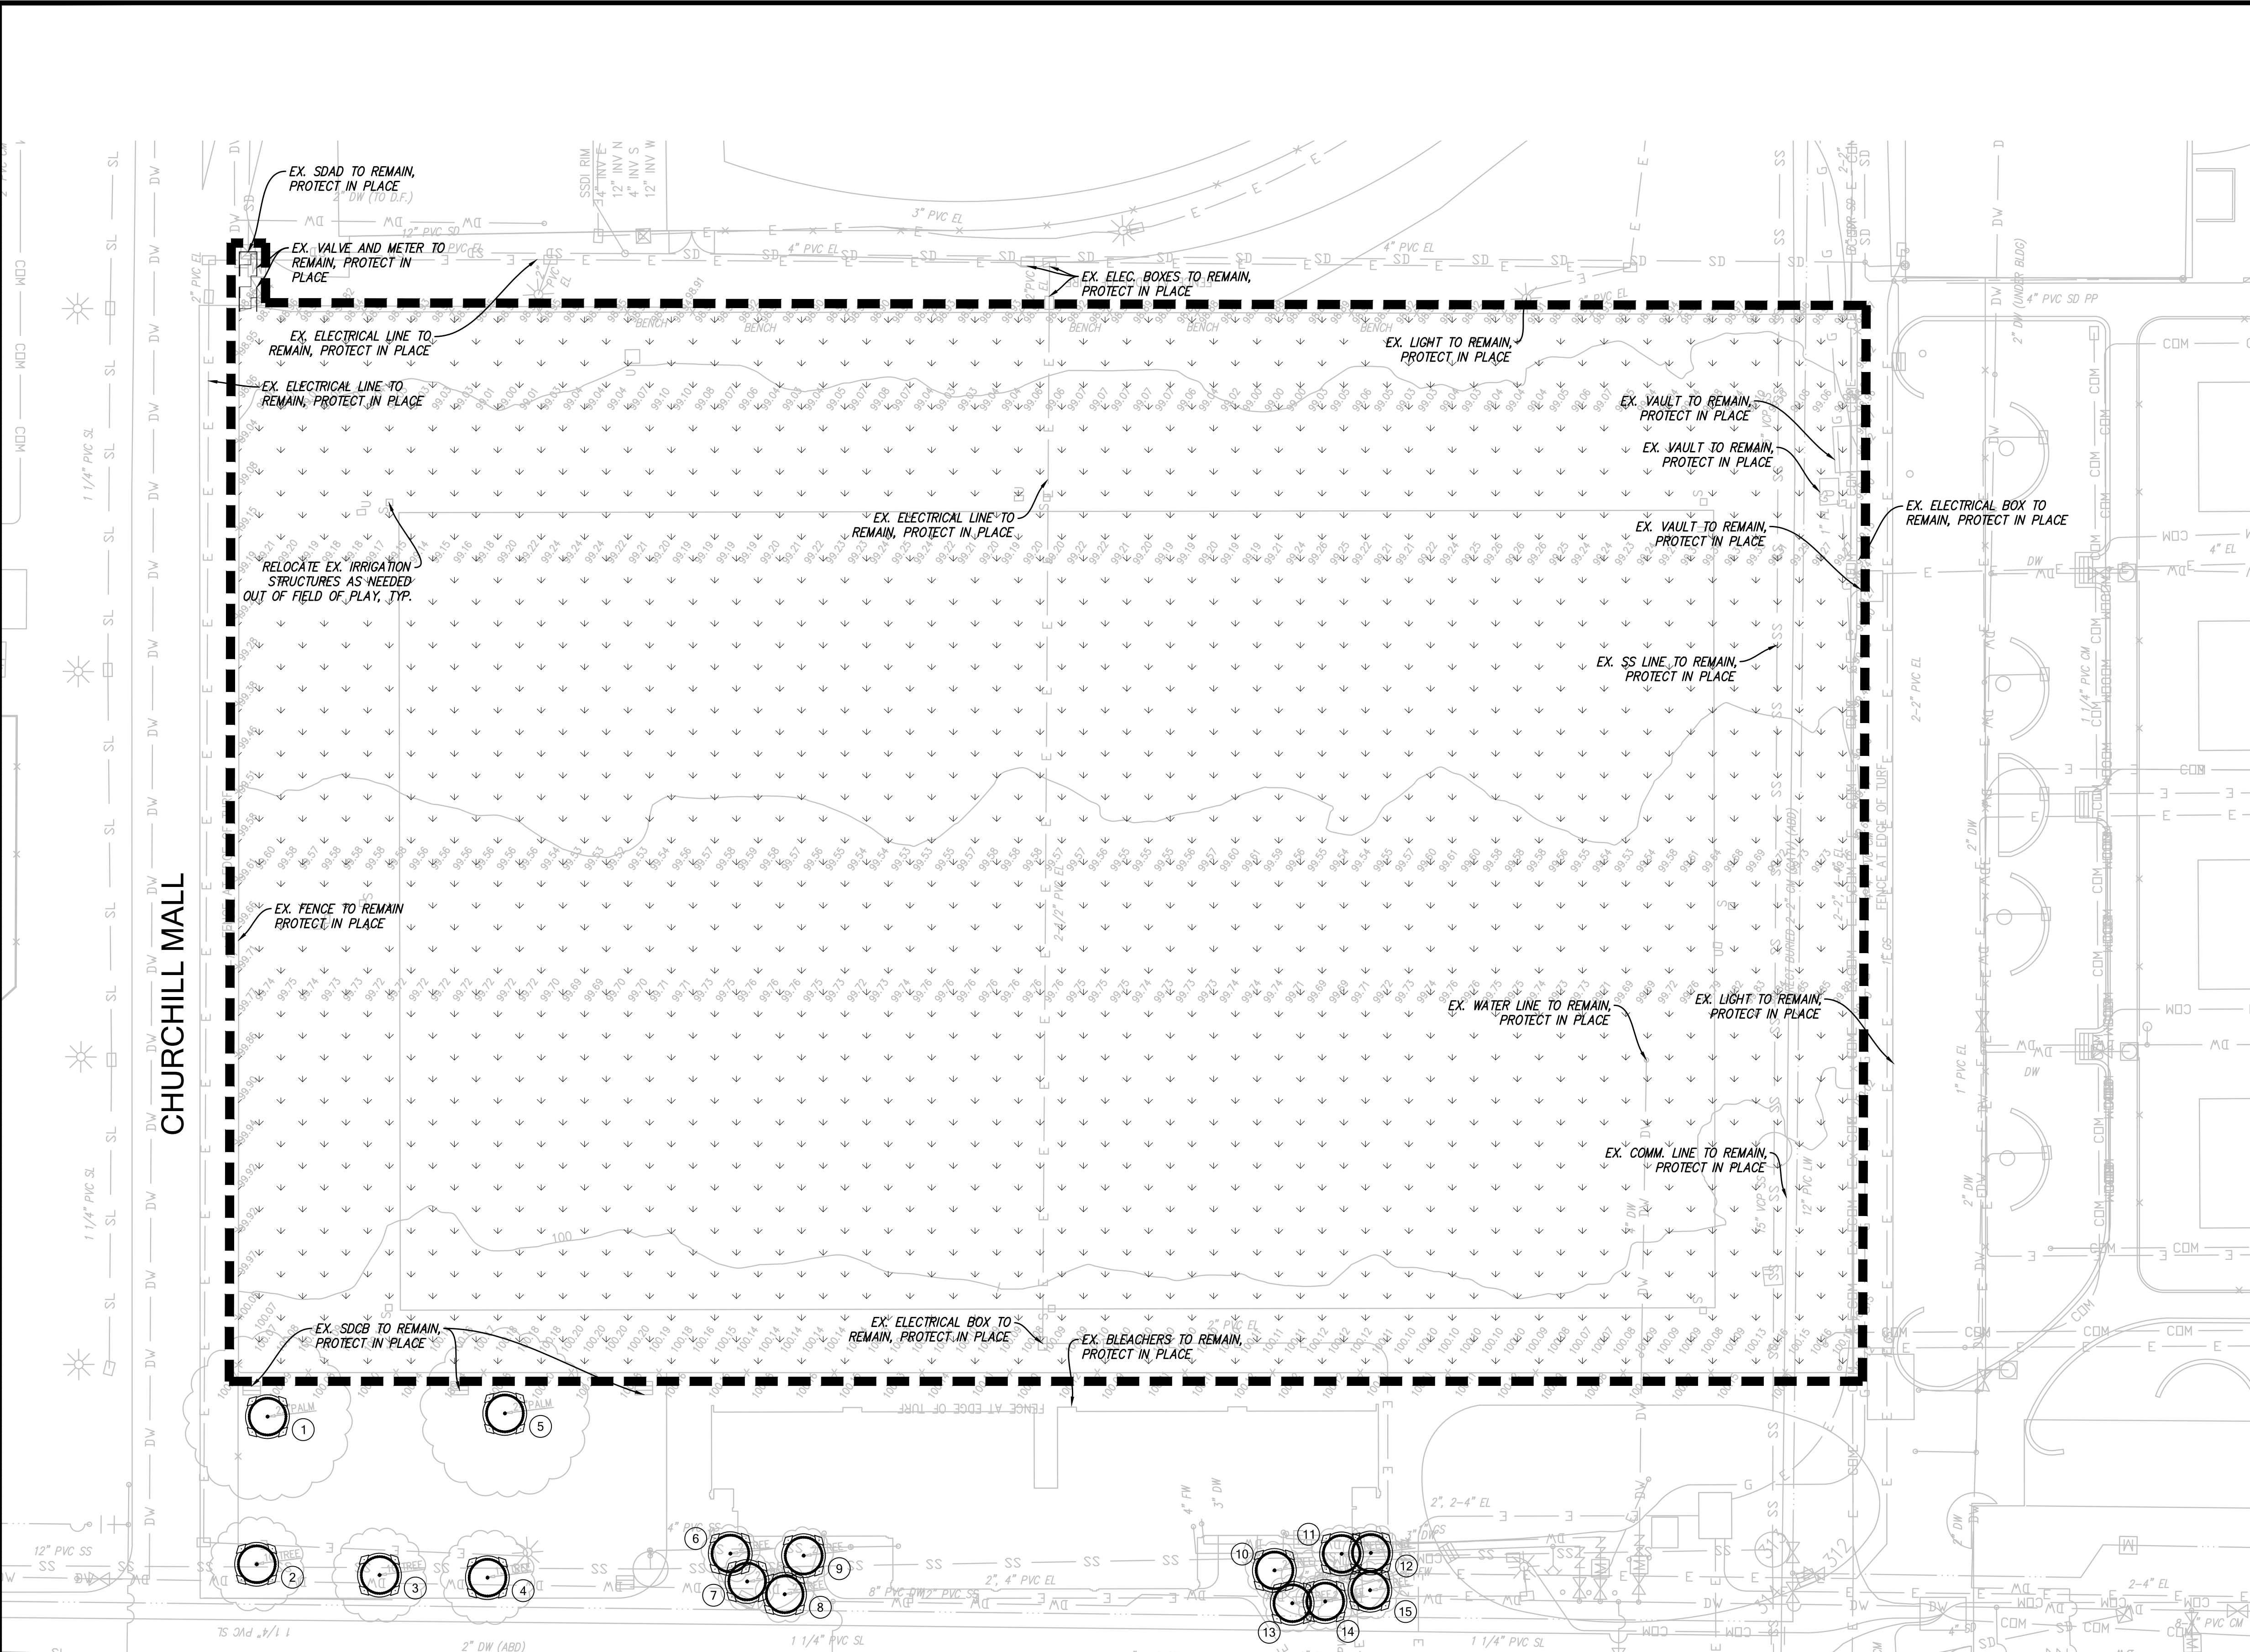

LEGEND

-  EXISTING TREE TO REMAIN. PROTECT IN PLACE. SEE NOTES ON THIS SHEET.
-  LIMIT OF WORK
-  REMOVE EXISTING TURF, PERVIOUS PAVEMENT, AND BASE MATERIAL
-  DEMOLISH AND REMOVE CONCRETE INCLUDING ANY ASSOCIATED BASE ROCK AND REBAR. STABILIZE THE EXISTING SUBGRADE

TREE DISPOSITION TABLE

TREE NO.	SPECIES	DBH (IN.)	REMOVE/REMAIN	PROTECTED STATUS
1	PALM TREE	22	REMAIN	PROTECTED
2	OAK	10	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
3	OAK	10	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
4	OAK	13	REMAIN	PROTECTED
5	PALM TREE	24	REMAIN	PROTECTED
6	CRAPE MYRTLE	2	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
7	CRAPE MYRTLE	2	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
8	CRAPE MYRTLE	2	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
9	CRAPE MYRTLE	2	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
10	CRAPE MYRTLE	2	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
11	CRAPE MYRTLE	2	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
12	CRAPE MYRTLE	2	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
13	CRAPE MYRTLE	2	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
14	CRAPE MYRTLE	2	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW
15	CRAPE MYRTLE	2	REMAIN	NOT PROTECTED, SEE CONDITION A BELOW

NOTES:
 CONDITION A: TREE IS NOT DESIGNATED AS A PROTECTED TREE DUE TO THE DBH BEING LESS THAN 12".
 CONDITION B: TREE IS NOT DESIGNATED AS A PROTECTED TREE DUE TO NOT BEING IDENTIFIED ON A PREVIOUS ASA.



BUILD ON.
SANDIS.NET

DATE: 11/27/2023
 SCALE: 1"=20'
 PROJECT No.: 222518.A

DATE: NOVEMBER 27, 2023

 NATHAN DICKINSON
 R.C.E. NO. 79716, EXPIRES 9-30-24



No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST

FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT
 STANFORD CALIFORNIA

DEMOLITION PLAN

SHEET
C-3.0

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.


SHEET NOTES

- COORDINATE DEMOLITION WORK WITH STANFORD UNIVERSITY'S; ADHERE TO ALL THEIR REQUIREMENTS.
- DEMOLITION AND CONSTRUCTION WORK MAY BE PERFORMED OVER THE TOP OF AND AROUND COMMUNICATION AND POWER SERVICES. CONTRACTOR SHALL WORK BY HAND IN ALL AREAS WHERE THESE SERVICES MIGHT BE HARMED BY LARGER LESS PRECISE EQUIPMENT.
- THE CONTRACTOR SHALL LOCATE AND CLEARLY MARK (AND THEN PRESERVE THESE MARKERS) FOR THE DURATION OF CONSTRUCTION OF ALL UNDERGROUND UTILITIES, INCLUDING TELEPHONE, DATA, STREET LIGHT, SIGNAL LIGHT AND POWER FACILITIES, LOW TEMPERATURE HOT WATER AND CHILLED HOT WATER LINES THAT ARE IN OR NEAR THE AREA OF DEMOLITION.
- CONTRACTOR'S BID IS TO INCLUDE ALL VISIBLE SURFACE AND ALL SUBSURFACE FEATURES IDENTIFIED TO BE REMOVED OR ABANDONED IN THESE DOCUMENTS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR A SITE INSPECTION TO FULLY ACKNOWLEDGE THE EXTENT OF THE DEMOLITION WORK.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ANY AND ALL PERMITS NECESSARY FOR ENCROACHMENT, GRADING, DEMOLITION, AND DISPOSAL OF SAID MATERIALS AS REQUIRED BY PRIVATE, LOCAL AND STATE JURISDICTIONS. THE CONTRACTOR SHALL PAY ALL FEES ASSOCIATED WITH THE DEMOLITION WORK.
- CONTRACTOR SHALL PAY DISPOSAL FEES.
- BACKFILL ALL DEPRESSIONS AND TRENCHES FROM DEMOLITION OF FOUNDATIONS & UTILITIES TO EXISTING GRADE AND TO THE SATISFACTION OF THE UNIVERSITY FIELD CONSTRUCTION MANAGER (FCM).
- WITHIN LIMITS OF WORK, REMOVE CURBS, GUTTERS, LANDSCAPING, SIGNAGE, TREES, SHRUBS, ASPHALT, UNDERGROUND PIPES, ETC. AS INDICATED ON THE DRAWINGS.
- CONTRACTOR SHALL BE RESPONSIBLE FOR DISPOSING ALL DEMOLITION MATERIALS, OR STORING SELECTED ITEMS BY UNIVERSITY'S REPRESENTATIVE AT DESIGNATED LOCATIONS.
- PRIOR TO BEGINNING DEMOLITION WORK, CONTRACTOR TO NOTIFY AND COORDINATE THE REMOVAL AND/OR ABANDONMENT OF ALL AFFECTED UTILITIES WITH THE FCM.
- CONTRACTOR RESPONSIBLE FOR PREPARING WASTE MANAGEMENT PLAN, TRAINING OF EMPLOYEES & SUBCONTRACTORS, AND ENSURING PROPER REMOVAL AND DISPOSAL OF ALL HAZARDOUS MATERIALS.
- THESE DRAWINGS DO NOT ADDRESS CONTRACTOR MEANS, METHODS OR PROCESSES THAT MAY BE ASSOCIATED WITH ANY TOXIC SOILS IF FOUND ON SITE. THE CONTRACTOR IS RESPONSIBLE FOR COMPLYING WITH ALL UNIVERSITY AND COUNTY STANDARDS AND APPROPRIATE REGULATIONS IF TOXIC SOILS ARE ENCOUNTERED. CONTRACTOR MUST NOTIFY THE FCM IMMEDIATELY IF ANY SOILS ARE EVEN SUSPECTED OF BEING CONTAMINATED.
- CONTRACTOR SHALL CONTACT UNDERGROUND SERVICE ALERT, USA, FOR LOCATION AND MARKING OF UNDERGROUND UTILITIES AT LEAST 48 HOURS PRIOR TO COMMENCEMENT OF CONSTRUCTION
- CONTRACTOR SHALL MAINTAIN THE EXISTING SITE AND STREETS IN A SAFE AND USABLE MANNER SUCH THAT EMERGENCY VEHICLE ACCESS IS AVAILABLE AT ALL TIMES. CONTRACTOR TO SUPPLY, INSTALL AND MAINTAIN ALL NECESSARY FENCING, GATES, BARRICADES, SIGNAGE, AND PROVISIONS FOR ENSURING THE PROJECT'S SECURITY AND SAFE PASSAGEWAY AROUND IT.
- CONTRACTOR SHALL GATHER ALL CONSTRUCTION DEBRIS ON A REGULAR BASIS AND PLACE IT IN A DUMPSTER OR OTHER CONTAINER WHICH IS EMPTIED OR REMOVED ON A REGULAR BASIS. WHEN APPROPRIATE, USE TARPS ON THE GROUND TO COLLECT FALLEN DEBRIS OR SPLATTERS THAT COULD CONTRIBUTE TO STORM WATER RUNOFF POLLUTION.
- CONTRACTOR SHALL CLEAR AND GRUB WITHIN LIMIT OF WORK AS NEEDED TO PERFORM DEMOLITION ACTIVITIES.
- SAWCUT & REMOVE HARDSCAPE SUCH AS, BUT NOT LIMITED TO, AC PAVEMENT, CURB, SIDEWALK, ETC.
- TAKE ALL NECESSARY PRECAUTIONS NOT TO DAMAGE EXISTING UNDERGROUND UTILITY LINES TO REMAINS DURING DEMOLITION. CONTRACTOR TO HIRE AN INDEPENDENT UNDERGROUND UTILITY LOCATOR SERVICE TO LOCATE & PAINT UTILITIES IN THE FIELD PRIOR TO CONSTRUCTION. ANY DAMAGE TO EXISTING UTILITIES TO REMAINS SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.
- CONTRACTOR SHALL SCHEDULE MEETING WITH STANFORD ARBORIST AND UA/CPD FOR REVIEW OF THE TREE PROTECTION PRIOR TO START OF CONSTRUCTION.
- CONTRACTOR TO SCHEDULE MEETING WITH HIGH VOLTAGE SHOP PRIOR TO REMOVING ANY EXISTING PULLBOXES.
- CONTRACTOR TO VERIFY THERE IS NO EXISTING COMM LINE CROSSING THE FIELD. IF ONE IS DISCOVERED IN CONSTRUCTION, IT SHALL BE REROUTED OUTSIDE OF THE FIELD.

STANFORD UNIVERSITY TREE PROTECTION PROCEDURES SUMMARY

- WE HAVE STRICT REQUIREMENTS WHICH INCLUDE THE POINTS LISTED BELOW AND ADDITIONAL PROCEDURES AS DETAILED IN THE FDG SPECIFICATIONS GUIDELINE 01 56 39 TREE AND PLANT PROTECTION.
- THE ROOT ZONE OF ALL TREES MUST BE PROTECTED ON ALL CONSTRUCTION PROJECTS, AS DESCRIBED BELOW. A TREE'S ROOT ZONE IS DEFINED AS LISTED IN DEFINITIONS 1.3B.
- A STANFORD GROUNDS CERTIFIED ARBORIST SHALL BE CONTACTED TO EVALUATE ALL WORK WITHIN ANY TREES ROOT ZONES.
- ALL TREES TO REMAIN ON A PROJECT SHALL HAVE PROTECTIVE FENCING INSTALLED PER THE TREE PROTECTION DRAWING INCLUDED IN THE PLAN SET.
- PROTECTIVE FENCING SHALL BE CHAIN LINK ON SECURE FOOTINGS, OR IMBEDDED AS REQUIRED BY THE CAMPUS PLANNING AND DESIGN OFFICE OR A STANFORD GROUNDS CERTIFIED ARBORIST, THAT WILL NOT FALL OVER ONTO TREES.
- PROTECTIVE FENCING SHALL BE PLACED AT THE OUTER EDGE OF THE ROOT ZONE, AS PER TREE PROTECTION PLAN 1.7.A.3, AND WHEREVER POSSIBLE AS SHOWN ON THE TREE PROTECTION DRAWING. IF PROJECT CONSTRAINTS DO NOT ALLOW FOR FENCING AT THE OUTER EDGE OF THE ROOT ZONE, FENCING MUST BE PLACED AS CLOSE TO THIS AS POSSIBLE AND APPROVED AFTER IT IS IN PLACE BY A STANFORD UNIVERSITY GROUNDS CERTIFIED ARBORIST.
- LAYDOWN, STAGING AND PARKING AREAS SHALL BE APPROVED BY THE STANFORD UNIVERSITY ARCHITECT/CAMPUS PLANNING DEPARTMENT AND SHALL BE SHOWN ON THE PLANS IF WITHIN THE PROJECT LIMIT AREA, OR ON THE CONSTRUCTION LOGISTICS PLAN IF OUTSIDE THE PROJECT LIMIT AREA. ALL TREE PROTECTION GUIDELINES APPLY TO TREES IN LAYDOWN, STAGING AND PARKING AREAS AS WELL AS TO TREES WITHIN THE PROJECT LIMITS.
- CONSTRUCTION MATERIALS/EQUIPMENT/PERSONAL VEHICLES SHALL NOT BE STORED, PARKED OR TEMPORARILY PLACED IN THE ROOT ZONE OF ANY TREES. NOTHING SHALL BE STORED OR PLACED TEMPORARILY WITHIN PROTECTIVE FENCING, TO AVOID SOIL COMPACTION AND SOIL CONTAMINATION UNDER TREES. ROOT ZONES OF TREES SHALL NOT BE DRIVEN OVER. PROVIDE ALTERNATIVE ROUTES FOR CONSTRUCTION TRAFFIC OF ANY KIND INCLUDING CARS, PEOPLE, TRACTORS, EQUIPMENT, CRANES, OR ANY OTHER TRAFFIC AND ALL STAGING OR STORAGE AREAS.
- PROTECT OVERHANGING TREE CANOPIES FROM CONSTRUCTION DAMAGE. IF DRIVE AISLES ARE ANTICIPATED UNDER LOW CANOPIES CALL FOR AN EVALUATION BY A STANFORD GROUNDS CERTIFIED ARBORIST TO DETERMINE APPROPRIATE MEASURES.
- THERE SHALL BE NO GRADE CHANGE WITHIN A MINIMUM OF TEN FEET OF THE TRUNK OF EXISTING TREES, AND PREFERABLY NONE WITHIN THE ENTIRE ROOT ZONE. NATIVE OAKS ARE PARTICULARLY SENSITIVE TO GRADE CHANGES.
- NO RINSING, CLEANING EQUIPMENT OR DUMPING CONSTRUCTION LIQUID MATERIALS SHALL BE ALLOWED IN THE TREE ROOT ZONE, OR IN AN AREA THAT DRAINS INTO THE ROOT ZONE. CARE SHALL BE TAKEN IN CLEANING UP EQUIPMENT. THERE SHALL BE NO STORAGE OF DUMPSTERS OR ACCUMULATED DEBRIS FROM DEMOLITION ON OR AROUND THE ROOT ZONES OF EXISTING TREES AND SHRUBS.
- EXISTING TREES SHALL BE MONITORED WEEKLY AND IRRIGATED AS NEEDED DURING THE COURSE OF CONSTRUCTION.
- NO LIME OR OTHER SOIL TREATMENT SHALL BE APPLIED WITHOUT THE CONSENT OF A STANFORD GROUNDS CERTIFIED ARBORIST.
- ALL TRENCHING SHALL CONFORM TO THE FOLLOWING GUIDELINES.
 - A STANFORD GROUNDS CERTIFIED ARBORIST IS REQUIRED TO BE PRESENT TO SUPERVISE ANY TRENCHING, DIGGING OR EXCAVATION OF ANY KIND WITHIN A TREE'S ROOT ZONE.
 - ROOTS LARGER THAN 2 INCHES IN DIAMETER SHALL NOT BE SEVERED WITHOUT CALLING A STANFORD GROUNDS CERTIFIED ARBORIST FOR CUTTING OR REVIEW.
 - TUNNELING OR BORING UNDER ROOTS RATHER THAN PRUNING IS PREFERRED.
 - DIGGING WITHIN A TREE'S ROOT ZONE SHALL BE AVOIDED. IF IT IS NECESSARY, HAND DIGGING SHALL BE USED FOR ANY TRENCHING WITHIN THE TREE'S ROOT ZONE UNLESS OTHERWISE APPROVED BY A STANFORD GROUNDS CERTIFIED ARBORIST.
 - ALL ROOTS THAT NEED TO BE CUT SHALL BE PERPENDICULAR PRUNED CLEANLY, NOT TORN.

THE PRECEDING GUIDELINES SHALL BE CONSIDERED MINIMUM REQUIREMENTS. THE GREATER THE DISTANCE OF TREE PROTECTION PROVIDED THE GREATER THE INSTANCE OF TREE SUCCESS IN CONSTRUCTION AREAS.

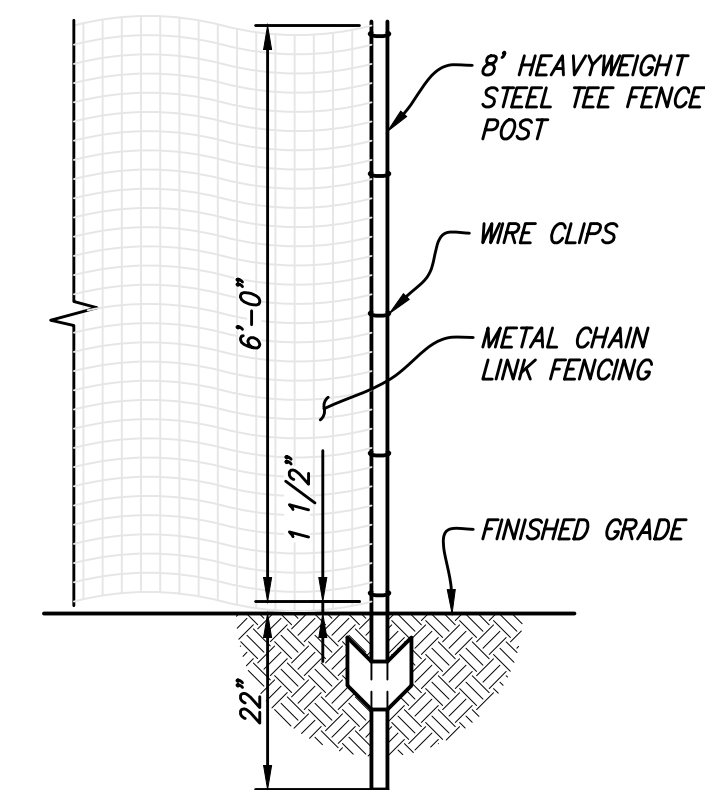

NOTES:

- THE DRIPLINE OF EACH TREE TO BE PROTECTED SHALL BE ENCLOSED WITH A 6' HIGH TEMPORARY FENCE. FENCE FABRIC SHALL BE HEAVY DUTY PERFORATED, BRIGHT COLORED, PLASTIC MESH. FENCE STAKES SHALL BE 8' HEAVY WEIGHT STEEL TEE FENCE POSTS DRIVEN 22" INTO GRADE.
- METAL CHAIN LINK FENCING ON SECURE FOOTINGS IMBEDDED WHERE REQUIRED BY CAMPUS PLANNING AND DESIGN OFFICE OR SGCA SHALL BE USED AT ALL TIMES TO PROTECT TREES EXCEPT IN AREAS WHERE IT WILL NOT PHYSICALLY FIT. ONLY IN AREAS WHERE IT CANNOT PHYSICALLY BE PLACED, WILL ORANGE PLASTIC SNOW FENCING WRAPPED 2" THICK AROUND THE TRUNK BE ALLOWED, AND ONLY AS APPROVED BY AN SGCA.

TREE PROTECTION DETAIL

N.T.S.

1



BUILD ON.
SANDIS.NET

DATE: 11/27/2023
SCALE: 1"=20'
PROJECT No.:
222518.A

DATE: NOVEMBER 27, 2023
[Signature]
NATHAN DICKINSON
R.C.E. NO. 79716, EXPIRES 9-30-24



No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST

FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT

STANFORD


CALIFORNIA

DEMOLITION NOTES

SHEET

C-3.1

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.

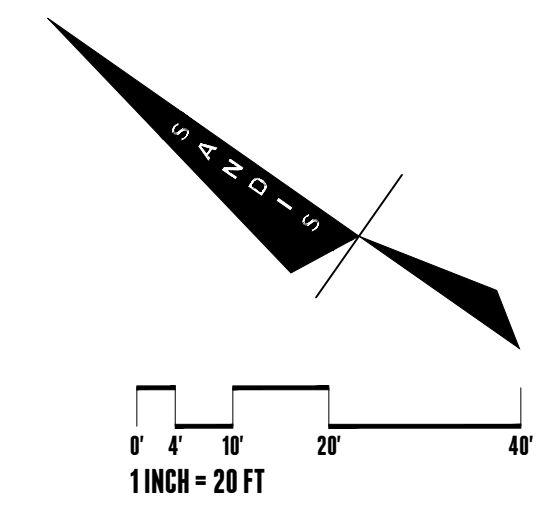


LEGEND

- LIMIT OF WORK
- SYNTHETIC TURF
- CONCRETE PAVING

GRADING NOTES

1. ROUGH GRADING TO BE WITHIN 0.1' AND FINISH GRADES ARE TO BE WITHIN 0.05', HOWEVER CONTRACTOR SHALL NOT CONSTRUCT ANY IMPROVEMENTS THAT WILL CAUSE WATER TO POND. DO NOT ADJUST GRADES ON THIS PLAN WITHOUT PRIOR WRITTEN APPROVAL OF THE ENGINEER/UNIVERSITY.
2. THE CONTRACTOR SHALL EXERCISE EXTREME CARE TO CONFORM TO THE LINES, GRADES, SECTIONS, AND DIMENSIONS AS SET FORTH ON THESE PLANS. ALL GRADED AREAS SHALL CONFORM TO THE VERTICAL ELEVATIONS SHOWN WITH A TOLERANCE OF ONE-TENTH OF A FOOT. WHERE GRADED AREAS DO NOT CONFORM TO THESE TOLERANCES, THE CONTRACTORS SHALL BE REQUIRED TO DO CORRECTIVE GRADING, AT NO EXTRA COST TO THE CLIENT.
3. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CONFIRM THE GROUND ELEVATIONS AND OVERALL TOPOGRAPHY OF THE SITE PRIOR TO THE START OF CONSTRUCTION AS TO THE ACCURACY BETWEEN THE WORK SET FORTH ON THESE PLANS AND THE WORK IN THE FIELD. ANY DISCREPANCIES SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE CONSTRUCTION MANAGER AND CIVIL ENGINEER IN WRITING PRIOR TO START OF CONSTRUCTION WHICH MAY REQUIRE CHANGES IN DESIGN AND/OR AFFECT THE EARTHWORK QUANTITIES.
4. ALL GRADING SHALL CONFORM TO APPROVED SPECIFICATIONS PRESENTED HEREON OR ATTACHED HERETO. ALL GRADING WORK SHALL BE OBSERVED AND APPROVED BY THE SOILS ENGINEER. THE SOILS ENGINEER SHALL BE NOTIFIED AT LEAST 48 HOURS BEFORE BEGINNING ANY GRADING. UNOBSERVED AND UNAPPROVED GRADING WORK SHALL BE REMOVED AND REDONE AT THE CONTRACTOR'S EXPENSE.
5. THE CONTRACTOR SHALL BE RESPONSIBLE TO REPAIR OR REPLACE ANY EXISTING IMPROVEMENTS OF UNDERGROUND FACILITIES DAMAGED DURING THE CONSTRUCTION PERIOD.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL ENCROACHMENT, EXCAVATION, CONCRETE, ELECTRICAL, PLUMBING, ETC. PERMITS NECESSARY PRIOR TO BEGINNING CONSTRUCTION FOR ANY WORK.
7. AREAS LACKING TOPOGRAPHIC INFORMATION (ELEVATIONS) HAVE BEEN INTERPOLATED USING STANDARD ENGINEERING METHODS. CONTRACTOR SHALL FIELD VERIFY ALL ELEVATIONS AT CONFORMS PRIOR TO COMMENCEMENT OF CONSTRUCTION AND REPORT BACK ANY DISCREPANCIES TO THE CIVIL ENGINEER.
8. ALL EXPOSED DISTURBED AREAS SHALL HAVE 2" OF SALVAGED TOPSOIL SPREAD ACROSS TOP SURFACE TO REESTABLISH LOCAL VEGETATION. THIS PROJECT DOES NOT USE ANY PLANTING OR IRRIGATION.

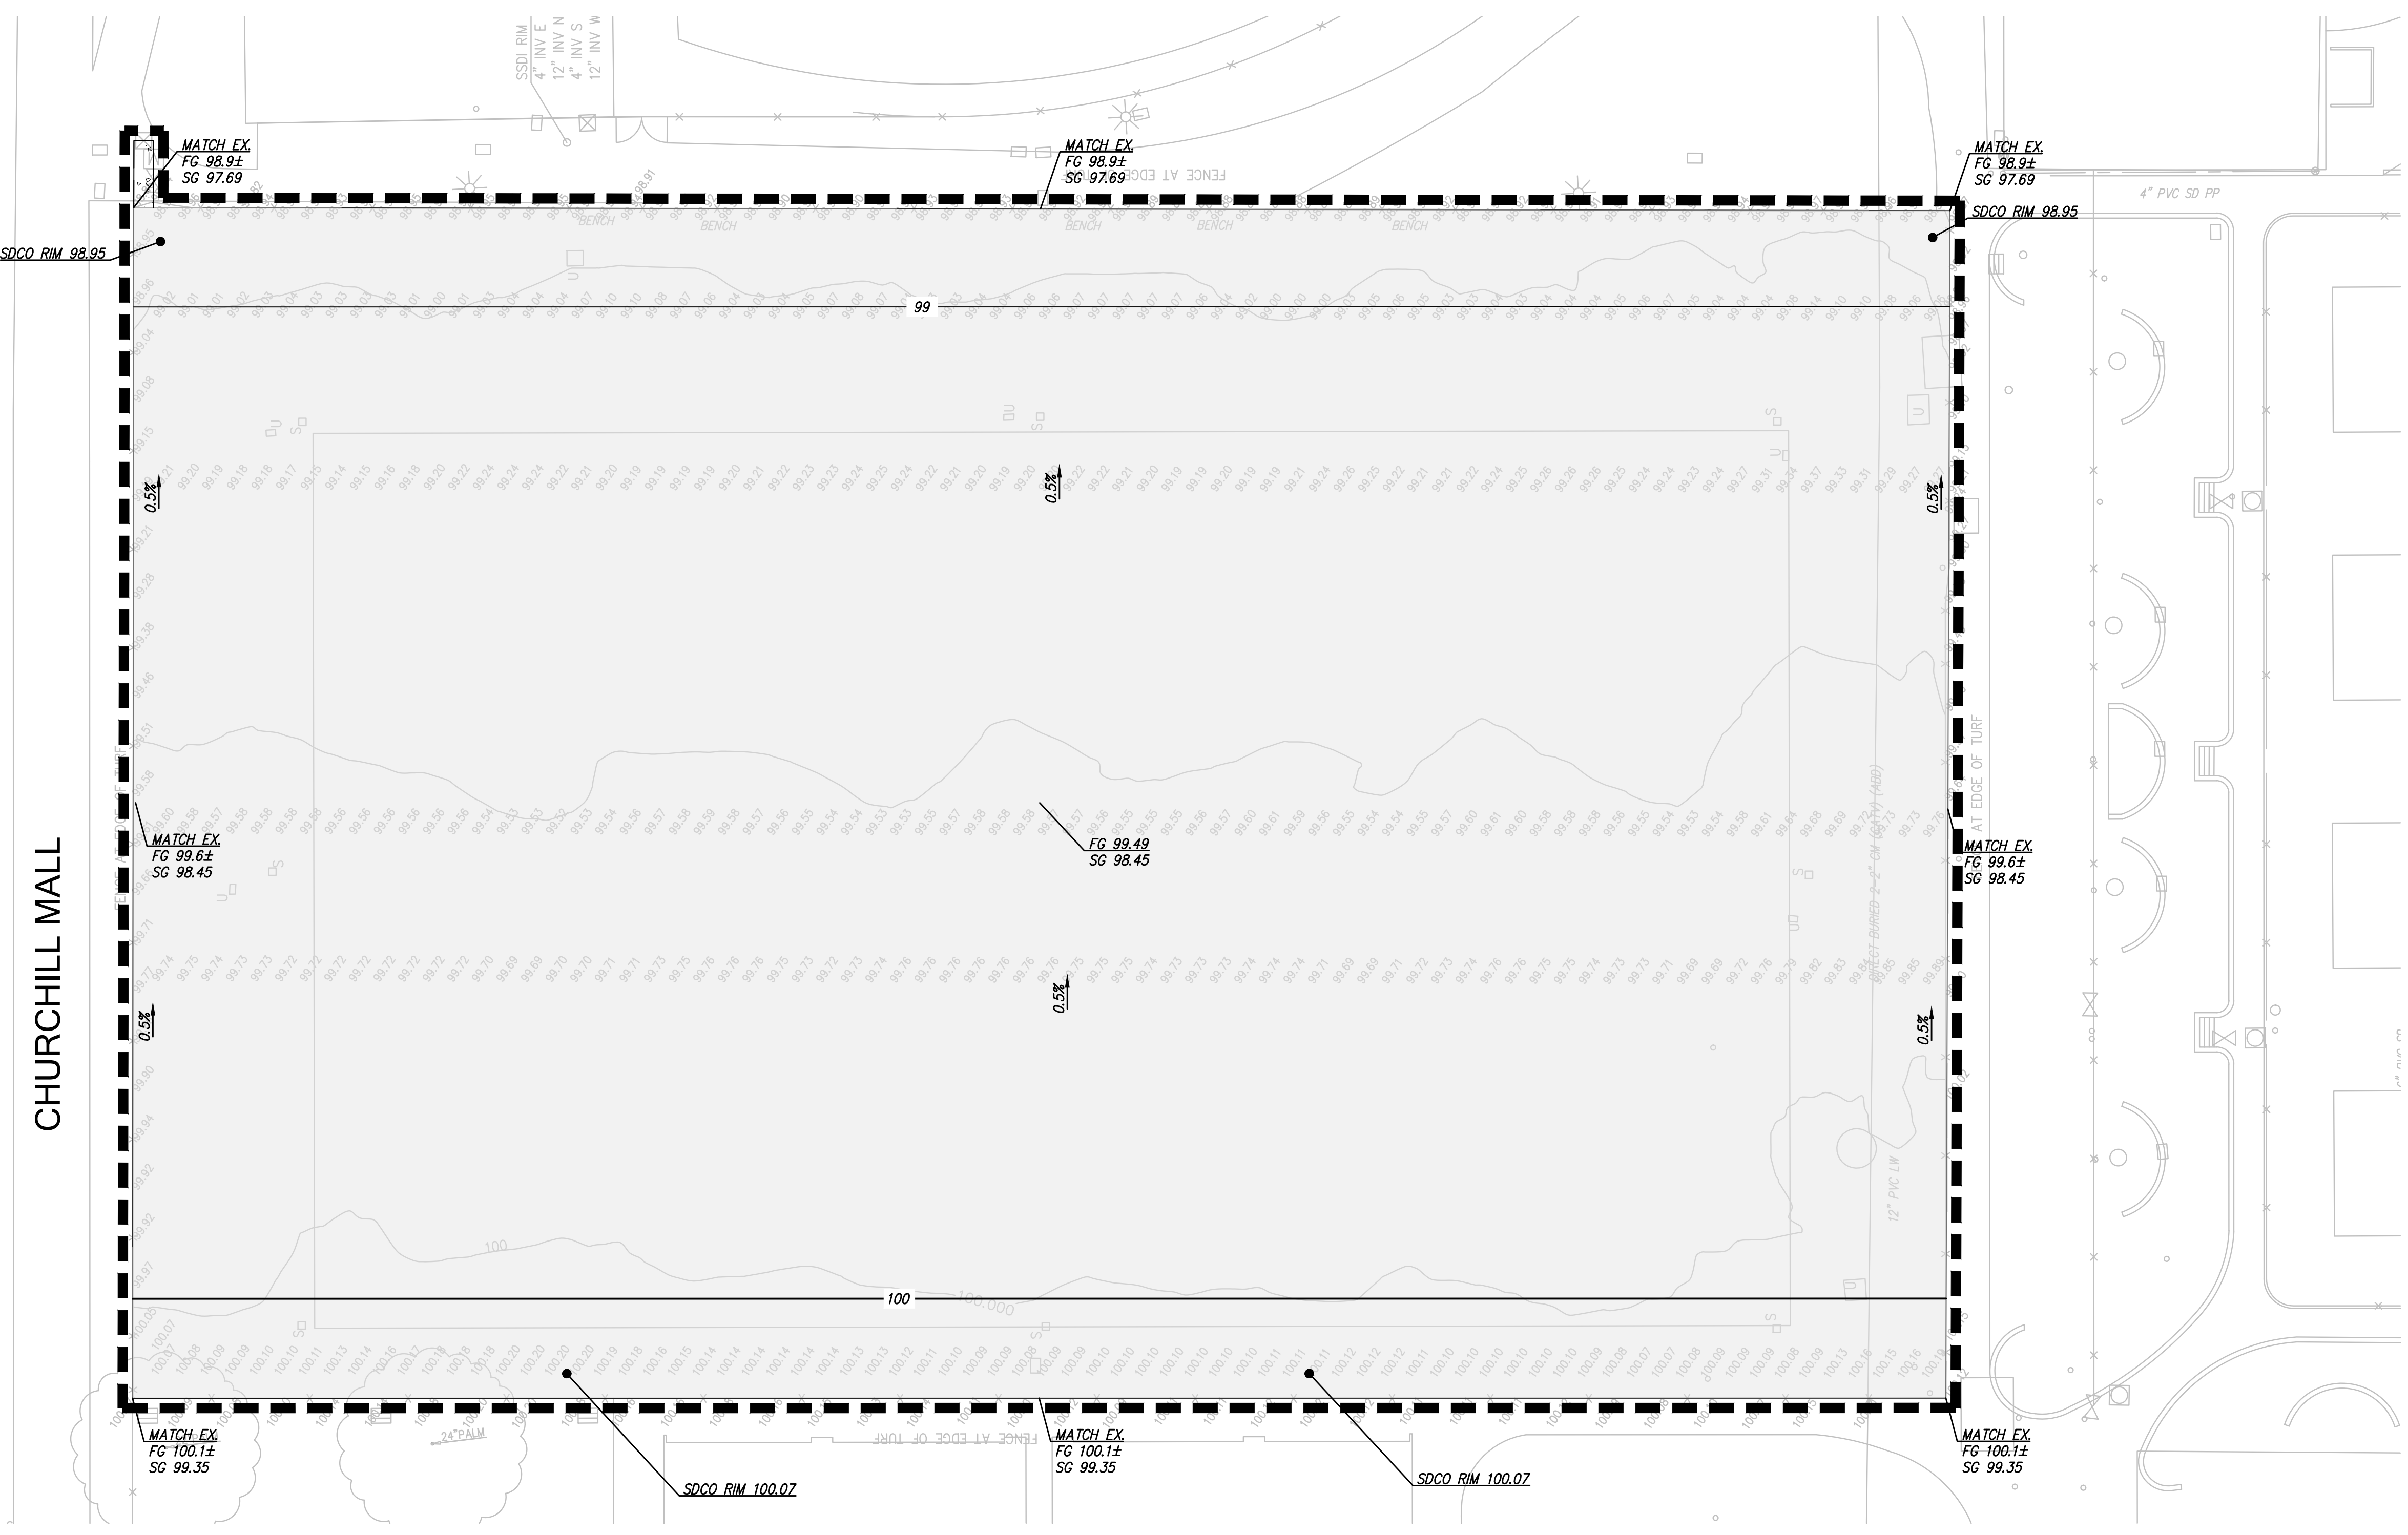

BUILD ON.
SANDIS.NET

DATE: 11/27/2023
SCALE: 1"=20'
PROJECT No.: 222518.A

DATE: NOVEMBER 27, 2023
NATHAN DICKINSON
R.C.E. NO. 79716, EXPIRES 9-30-24


No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST

FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT
STANFORD CALIFORNIA

GRADING AND DRAINAGE PLAN

SHEET
C-4.0
OF 13 SHEETS

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.

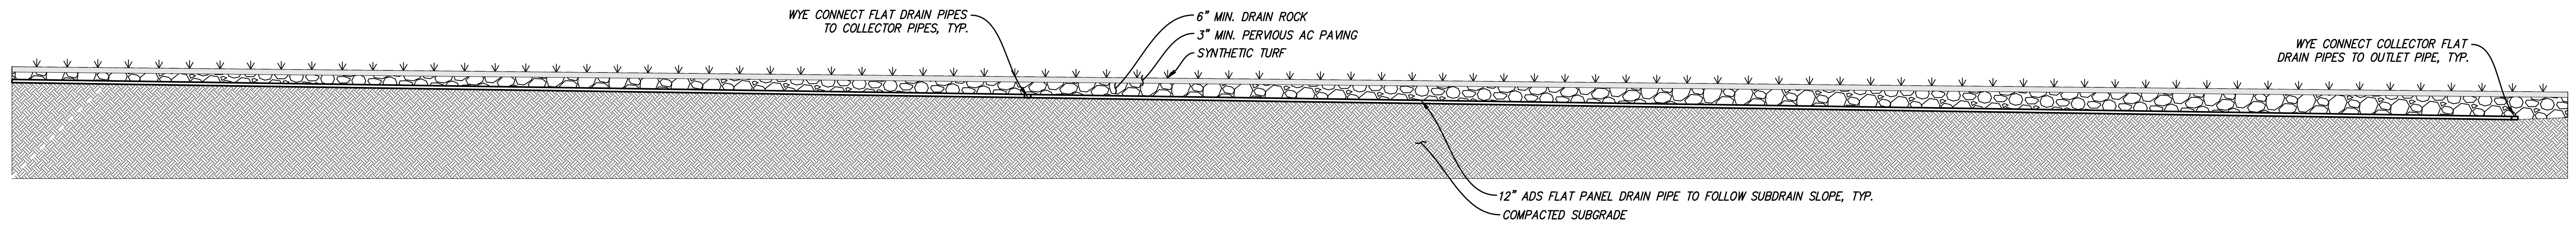

TYPICAL SYNTHETIC TURF SECTION
N.T.S.


1



BUILD ON.
SANDIS.NET

DATE: 11/27/2023
SCALE: N.T.S.
PROJECT No.: 222518.A

DATE: NOVEMBER 27, 2023
NATHAN DICKINSON
R.C.E. NO. 79716, EXPIRES 9-30-24




No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST

FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT
STANFORD CALIFORNIA

GRADING SECTION

SHEET
C-4.1
OF 13 SHEETS

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.

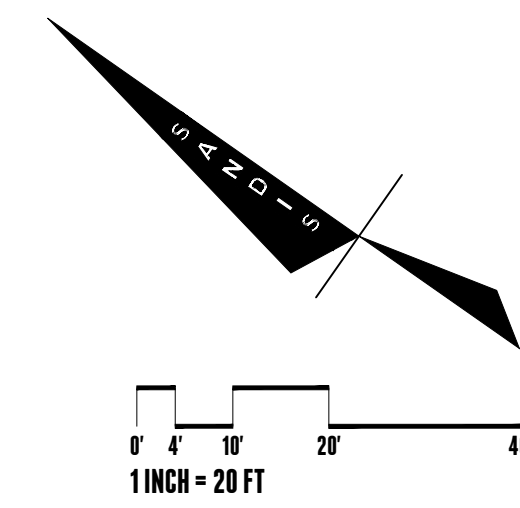


LEGEND

- LIMIT OF WORK
- STORM DRAIN CLEANOUT (CS-314 C-9.0)
- FLAT PANEL DRAINAGE PIPING (1 C-9.0)

STORM DRAIN NOTES

1. STORM DRAIN LINE 4-INCH THROUGH 12-INCH WITH A MINIMUM OF TWO (2) FEET OF COVER IN NON-TRAFFIC AREAS SHALL BE POLYVINYL CHLORIDE (PVC) SDR 35 GREEN PIPE AND SHALL CONFORM TO THE REQUIREMENTS OF ASTM DESIGNATION D 3034-73 WITH BELLS AND SPIGOT CONNECTIONS. ALL DIRECTION CHANGES SHALL BE MADE WITH WYE CONNECTIONS, 22.5° ELBOWS, 45° ELBOWS OR LONG SWEEP ELBOWS, 90° ELBOWS AND TEE'S ARE PROHIBITED.
2. STORM DRAIN LINE 6-INCH THROUGH 12-INCH WITH LESS THAN THREE (3) FEET OF COVER IN VEHICULAR TRAFFIC AREAS SHALL BE POLYVINYL CHLORIDE (PVC) C900, RATED FOR 150 PSI CLASS PIPE. PROVIDE AND INSTALL "STORM DRAIN" MARKER TAPE FOR THE ENTIRE LENGTH OF PIPE TRENCH. ALL DIRECTION CHANGES SHALL BE MADE WITH WYE CONNECTIONS, OBTUSE ELBOWS OR LONG SWEEP ELBOWS, 90° ELBOWS AND TEE'S ARE PROHIBITED.
3. ALL AREA DRAINS AND CATCH BASINS GRATES WITHIN PEDESTRIAN ACCESSIBLE AREAS SHALL MEET ADA REQUIREMENTS.
4. ALL TRENCHES SHALL BE BACK FILLED PER THE SPECIFICATIONS WITH APPROPRIATE TESTS BY THE GEOTECHNICAL ENGINEER TO VERIFY COMPACTION VALUES.
5. FOR GRAVITY FLOW SYSTEMS CONTRACTOR SHALL VERIFY (POTHOLE IF NECESSARY) SIZE, MATERIAL, LOCATION AND DEPTH OF ALL SYSTEMS THAT ARE TO BE CONNECTED TO OR CROSSED PRIOR TO THE TRENCHING OR INSTALLATION OF ANY GRAVITY FLOW SYSTEM.
6. DRAINS SHOWN ON CIVIL PLANS ARE NOT INTENDED TO BE THE FINAL NUMBER AND LOCATION OF ALL DRAINS. PLACEMENT AND NUMBER OF LANDSCAPING DRAINS ARE HIGHLY DEPENDENT ON GROUND COVER TYPE AND PLANT MATERIAL. CONTRACTOR SHALL ADD ADDITIONAL AREA DRAINS AS NEEDED AND AS DIRECTED BY THE LANDSCAPE ARCHITECT.
7. CONTRACTOR IS RESPONSIBLE TO ENSURE ACCESS TO ALL VAULTS AFTER COMPLETION. DO NOT GLUE TURF TO VAULT COVERS WITHOUT MASKING THE SEPARATION BETWEEN THE VAULT COVER AND THE VAULT.
8. ALL CATCH BASINS SHALL BE STENCILED WITH "NO DUMPING DRAINS TO BAY" AND BE MARKED WITH THERMOPLASTIC OR METAL BUTTONS PER STANFORD FACILITIES DESIGN GUIDELINES SECTION 33 40 00.

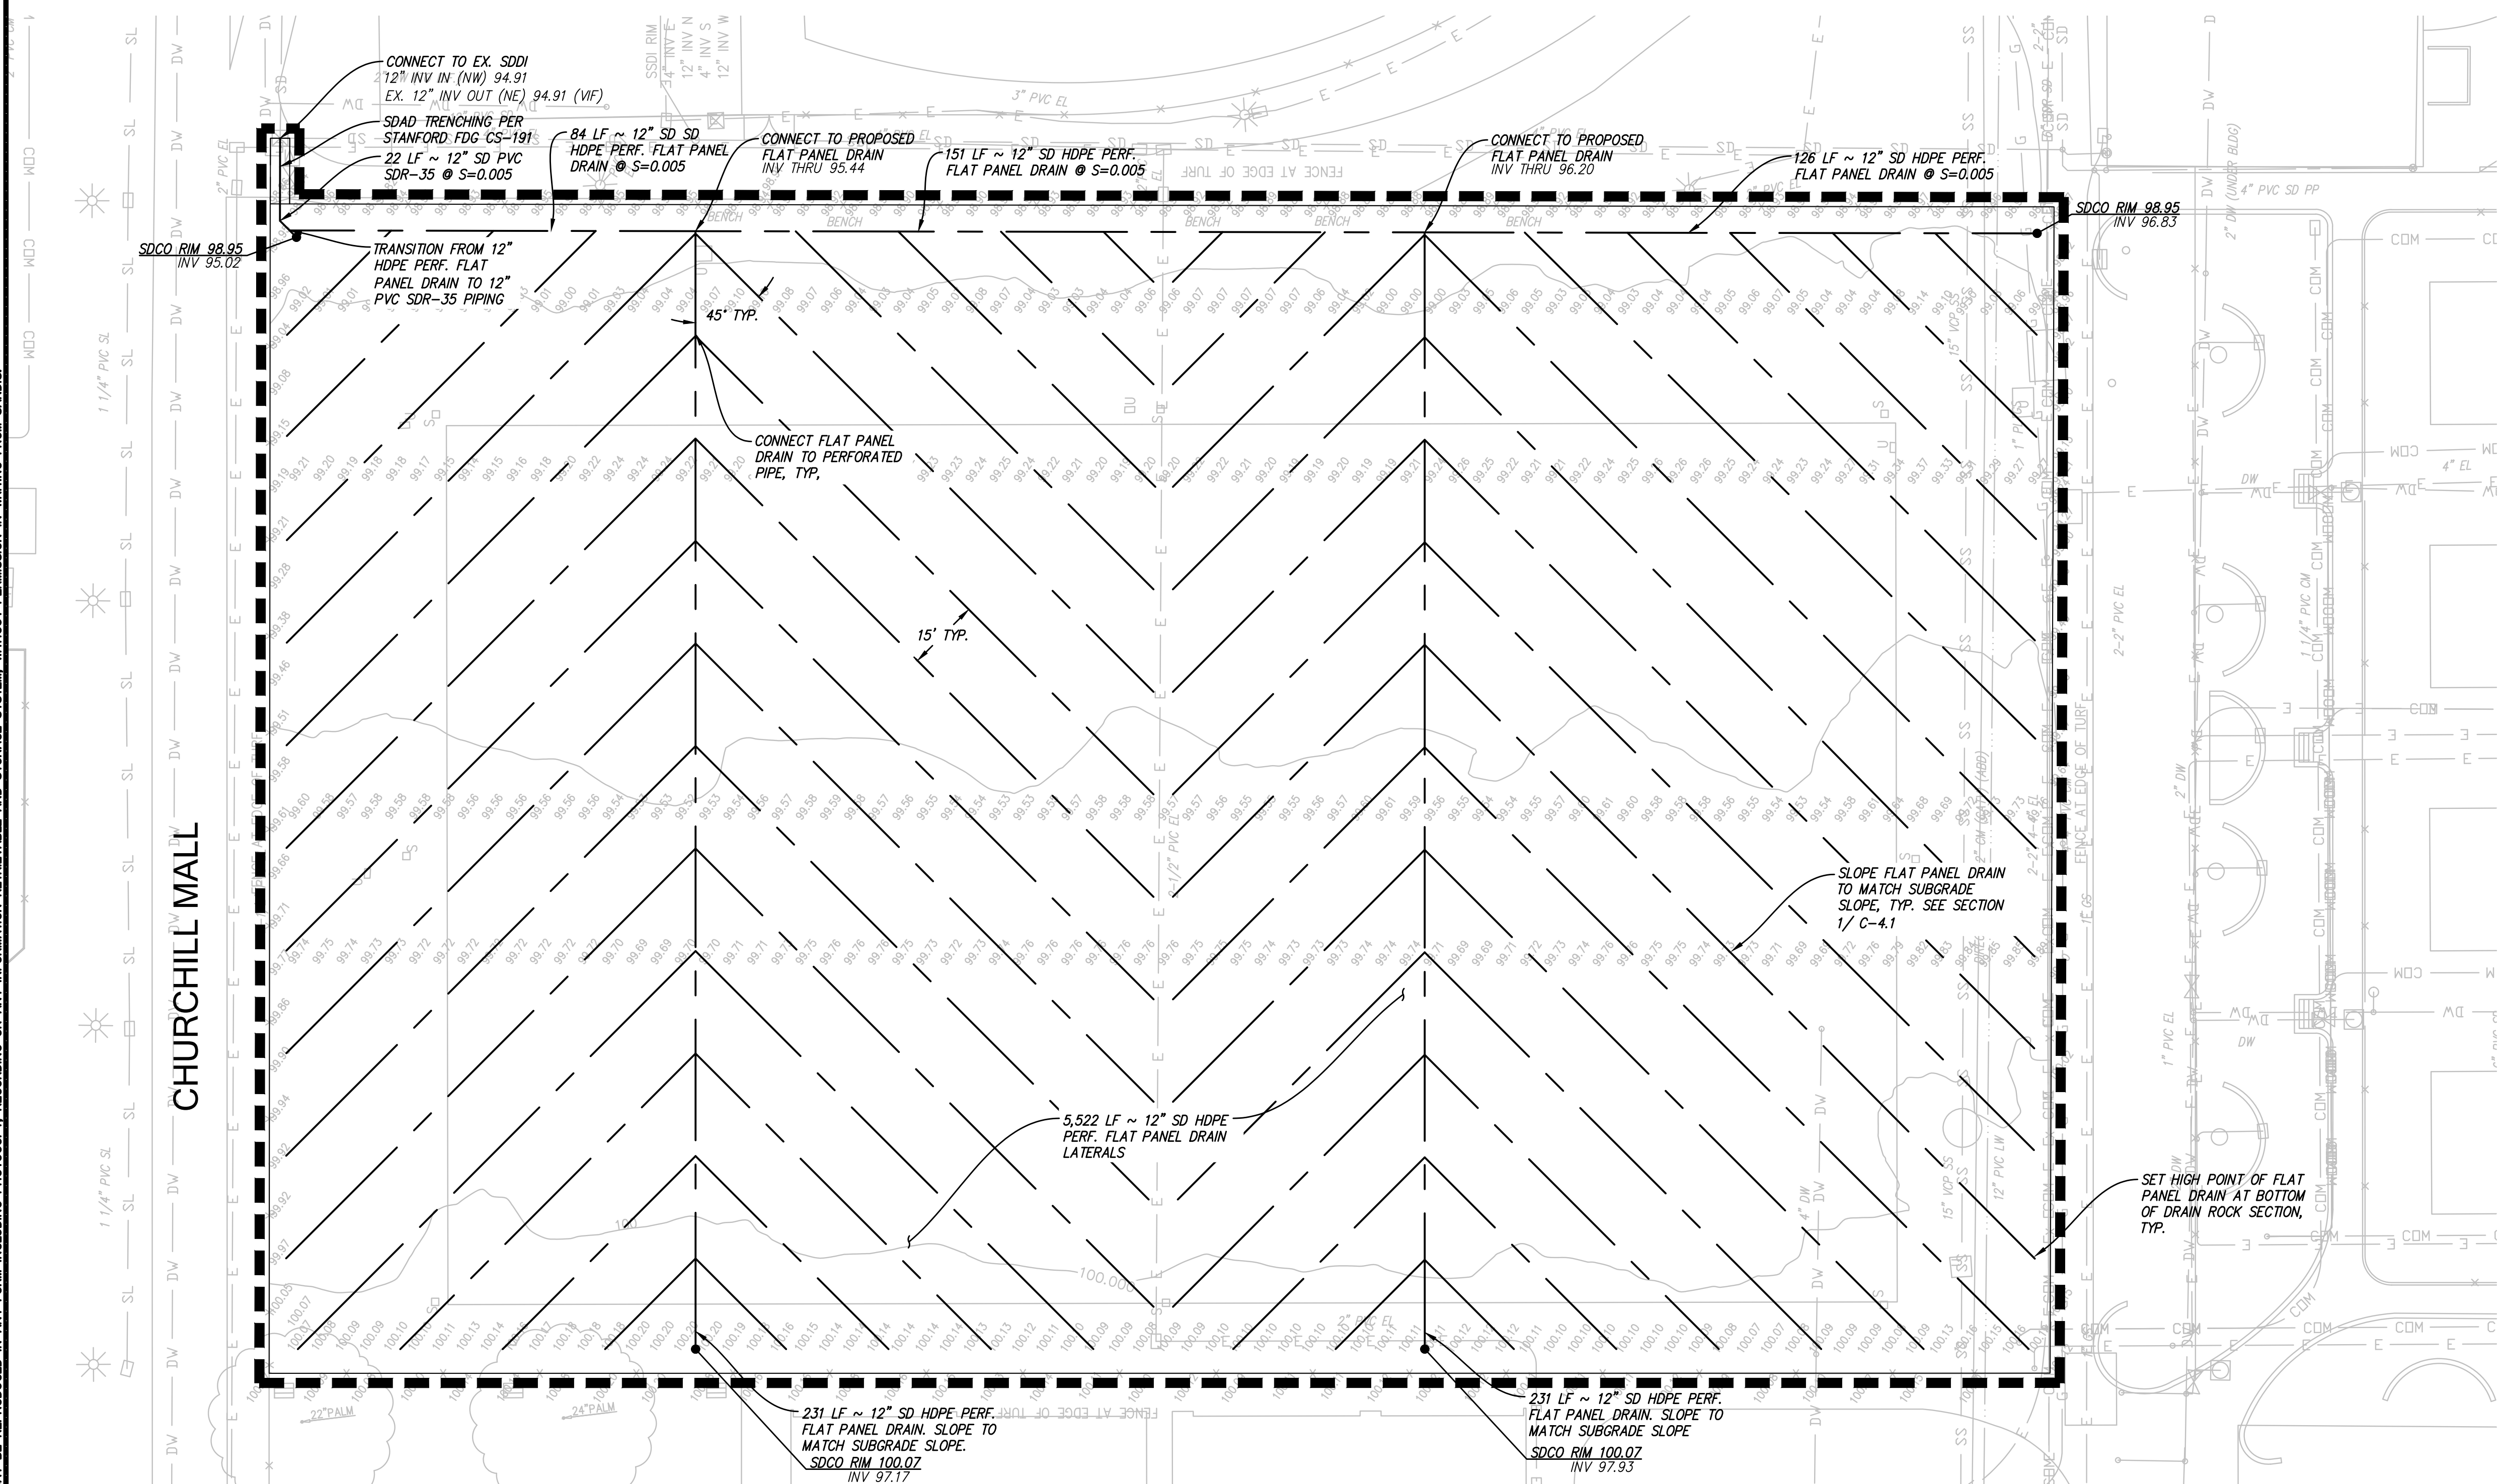

CHURCHILL MALL



BUILD ON.
SANDIS.NET

DATE: 11/27/2023
SCALE: 1"=20'
PROJECT No.: 222518.A

DATE: NOVEMBER 27, 2023
NATHAN DICKINSON
R.C.E. No. 79716, EXPIRES 9-30-24


No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST

FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT
STANFORD CALIFORNIA


UTILITY PLAN

SHEET
C-5.0
OF 13 SHEETS

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.

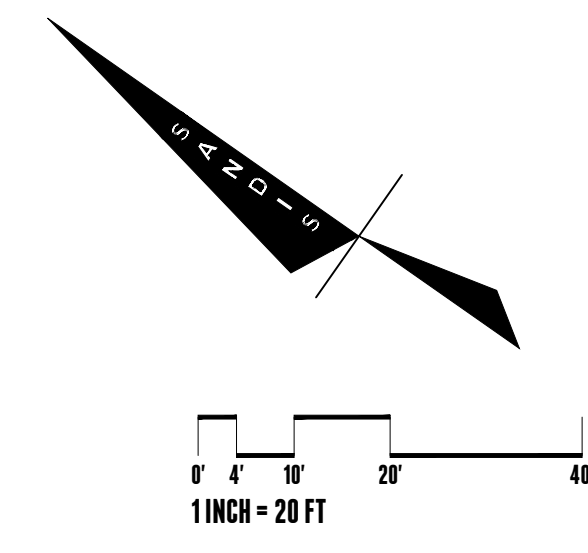

STORMWATER MANAGEMENT PLAN LEGEND

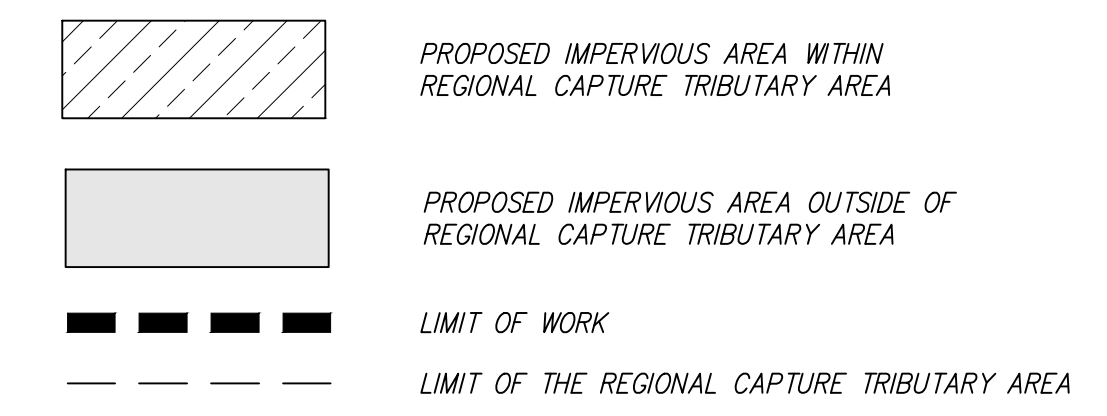

HYDROMODIFICATION NOTE:

THE PROJECT IS EXEMPT FROM HYDROMODIFICATION REQUIREMENTS PER THE SANTA CLARA C.3 TECHNICAL GUIDANCE DOCUMENT. THE PROJECT IS EXEMPT FROM HYDROMODIFICATION DUE TO THE WATER SHED DRAINING INTO A HARDENED CHANNEL.

SITE TREATMENT AREA NOTE:

THIS PROJECT IS REPLACING MORE THAN 50% OF THE EXISTING IMPERVIOUS AREA WITHIN THE STANFORD FIELD HOCKEY STADIUM PROJECT LIMITS, THEREFORE THE PROJECT WILL TREAT ALL THE IMPERVIOUS AREA WITHIN THE PROJECT LIMIT.

STORMWATER MANAGEMENT NOTES:


1. THIS PLAN PRESENTS METHODS AND CALCULATIONS FOR COMPLYING WITH THE REQUIREMENTS OF PROVISION C.3 OF THE MUNICIPAL REGIONAL STORMWATER PERMIT IN ACCORDANCE WITH THE SANTA CLARA COUNTY PROGRAM AND THE STANFORD REQUIREMENTS.
2. C.3 TREATMENT REQUIREMENTS FOR THIS PROJECT WILL BE ADDRESSED UTILIZING REGULATED CAPACITY AND IN-LIEU CREDITS PROVIDED BY THE FELT LAKE (EAST CAMPUS) STORM WATER CAPTURE SYSTEM (COUNTY FILE NOS. 11044-17C3 AND AR23-0480).

DRAINAGE AREA:

PROPOSED IMPERVIOUS (SF)	89,239
PROPOSED PERVIOUS (SF)	-
REPLACED VEHICULAR IMPERVIOUS (SF)	-
TOTAL (SF)	89,239

EXISTING AND PROPOSED AREA QUANTITIES

	EXISTING	PROPOSED
IMPERVIOUS (SF)	89,239	89,239
PERVIOUS (SF)	-	-
TOTAL (SF)	89,239	89,239

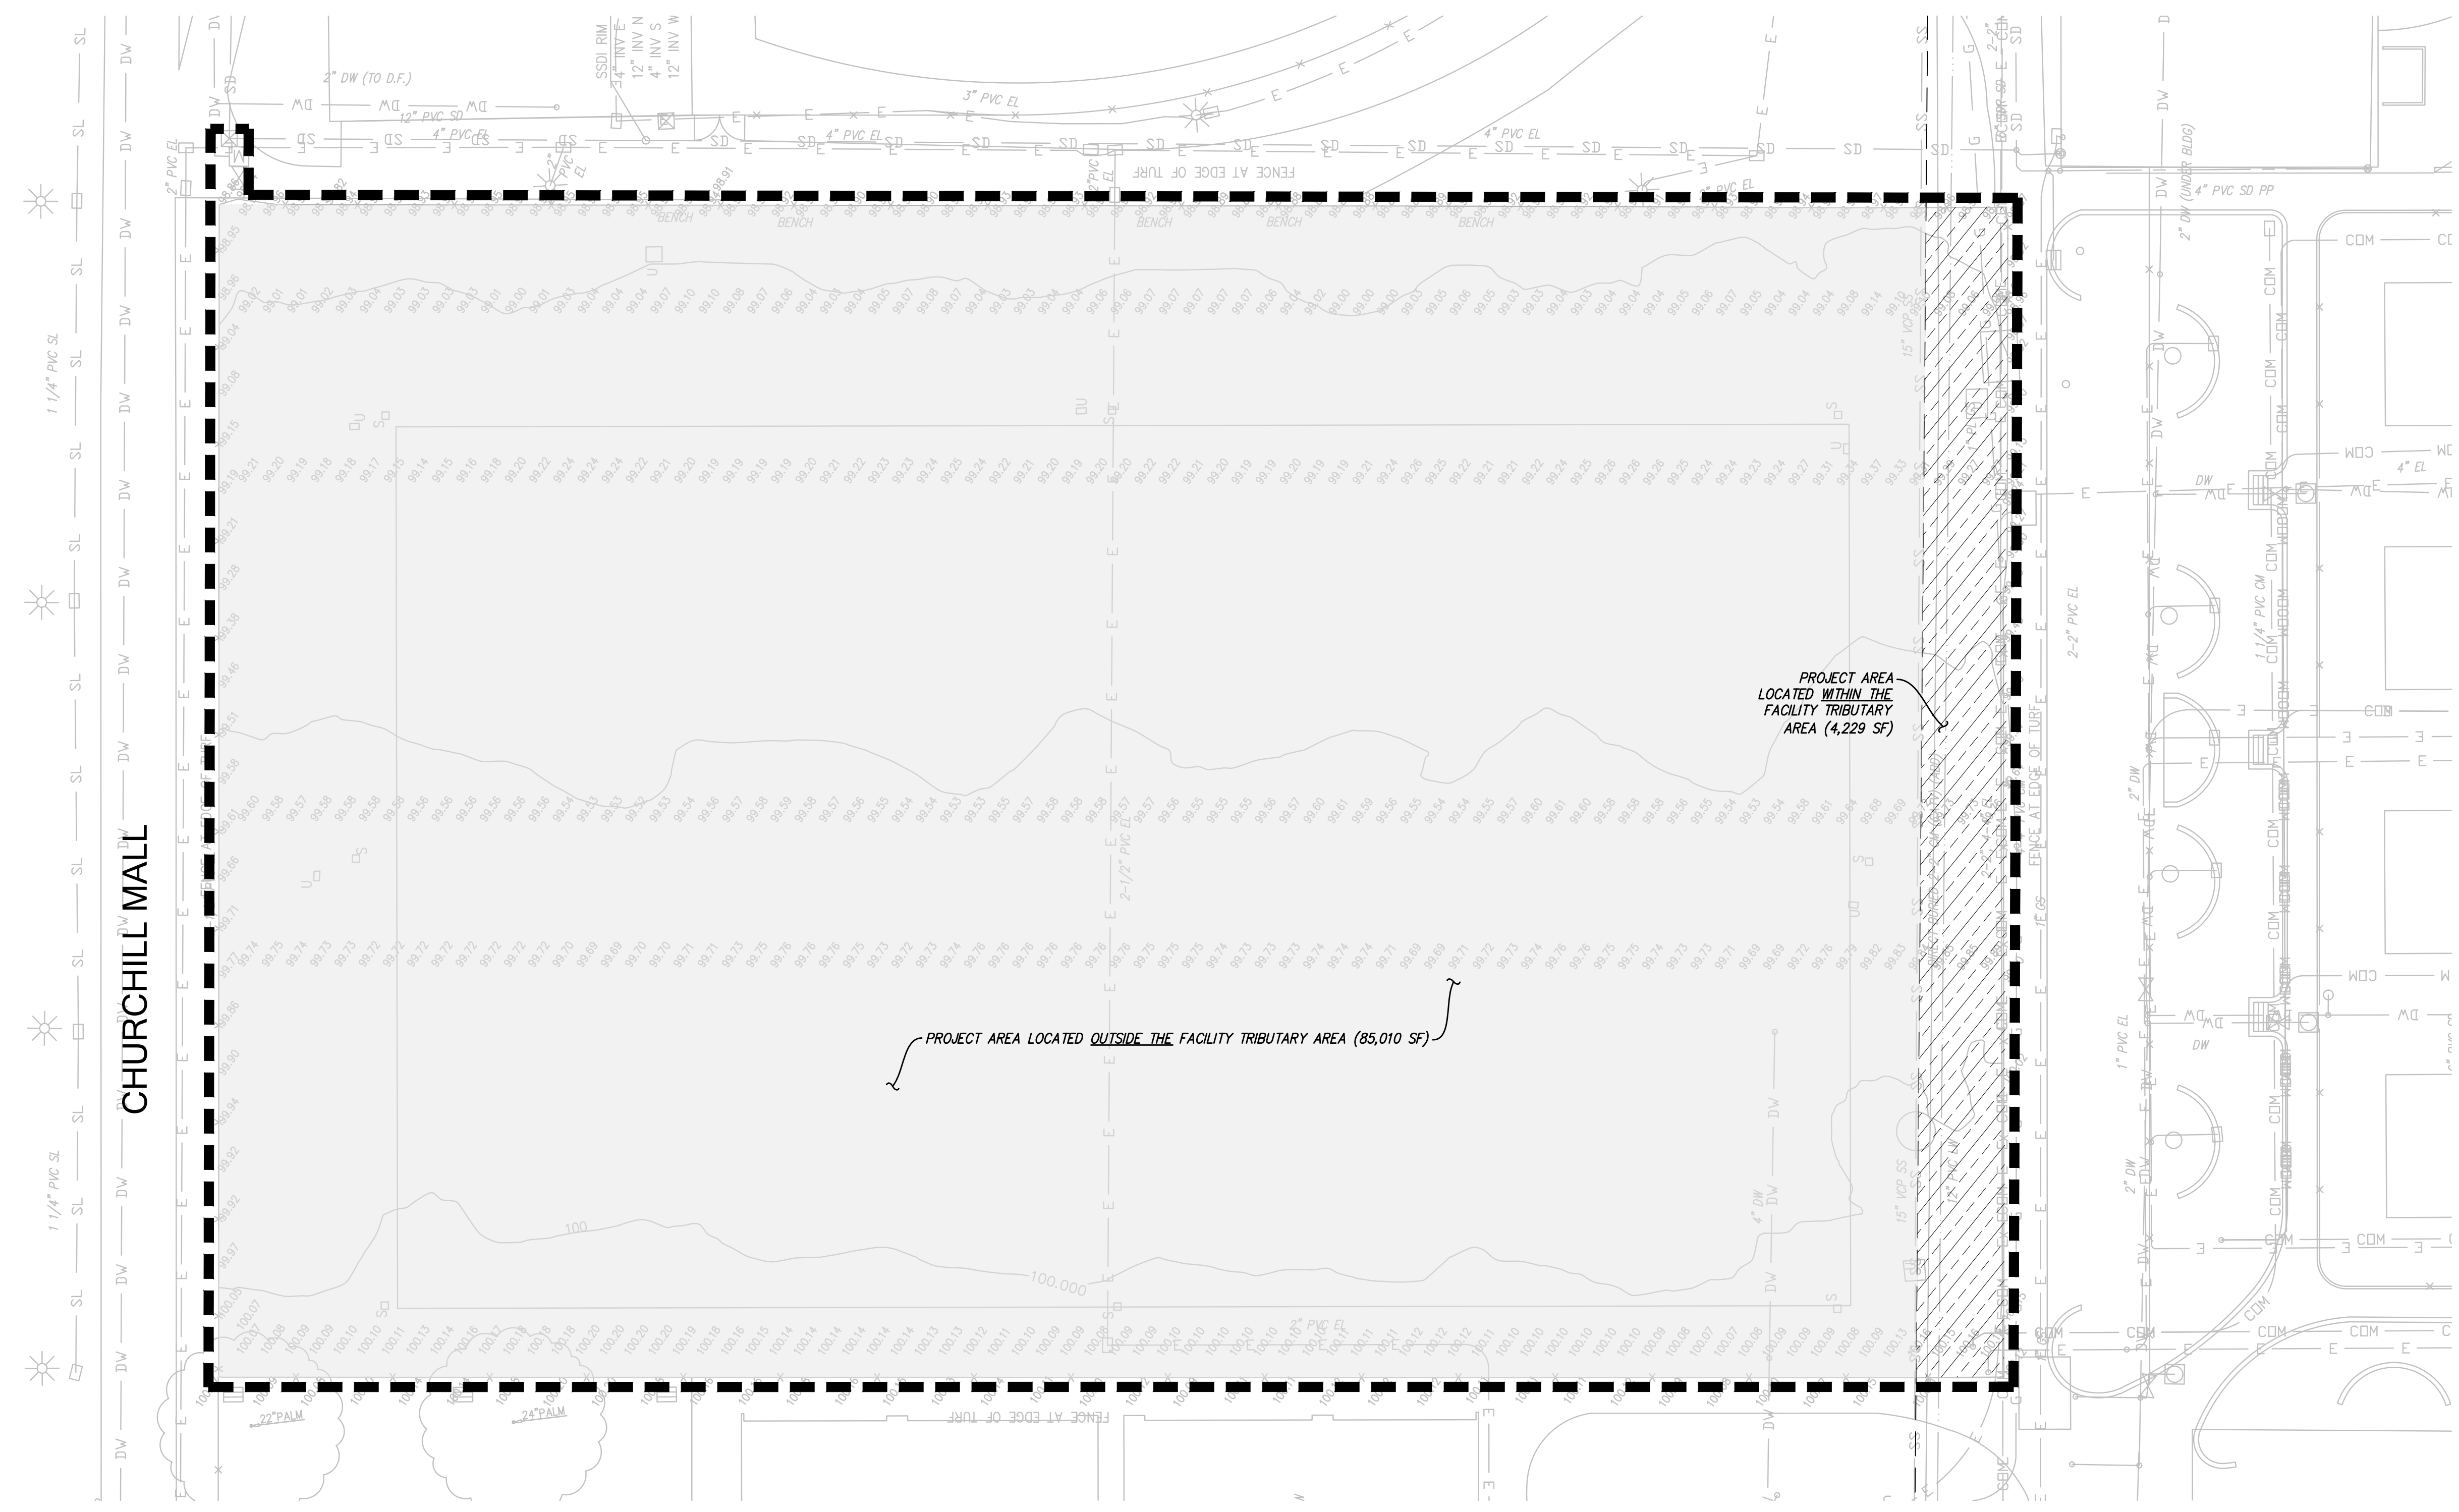

PROJECT NAME: FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT		WATERSHED: Matedero Creek	
PROJECT IMPERVIOUS AREA SUMMARY			
EXISTING	REGULATED IMPERVIOUS1 (SF)	UNREGULATED IMPERVIOUS2 (SF)	TOTAL PROJECT AREA
	VEHICULAR	NON-VEHICULAR	
PROPOSED	4,229	0	4,229

	VEHICULAR (SF)	NON-VEHICULAR (SF)
IN-LIEU CREDIT USED3 (SF)	0	85,010

1. REGULATED IMPERVIOUS IS ALL NEW OR REPLACED IMPERVIOUS AREAS REQUIRED TO BE TREATED PER MRP SECTION C.3. IT ALSO INCLUDES EXISTING IMPERVIOUS AREA ALREADY REQUIRING TREATMENT OR EXISTING IMPERVIOUS AREA THAT IS REQUIRED TO BE TREATED UNDER THE 50% RULE.
2. UNREGULATED IMPERVIOUS IS EXISTING IMPERVIOUS THAT IS NOT REQUIRED TO BE TREATED PER MRP SECTION C.3. IT ALSO INCLUDES NEW IMPERVIOUS AREA THAT IS NOT REQUIRED TO BE TREATED UNDER THE 50% RULE.
3. IN-LIEU CREDIT USED IS THE PORTION OF REGULATED IMPERVIOUS THAT IS MEETING MRP SECTION C.3 USING IN-LIEU CREDITS FROM REGIONAL STORMWATER TREATMENT FACILITIES.



BUILD ON.
SANDIS.NET

DATE: 11/27/2023
SCALE: 1"=20'
PROJECT No.: 222518.A

DATE: NOVEMBER 27, 2023
NATHAN DICKINSON
R.C.E. NO. 79716, EXPIRES 9-30-24



No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST

FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT
STANFORD CALIFORNIA










STORMWATER MANAGEMENT PLAN

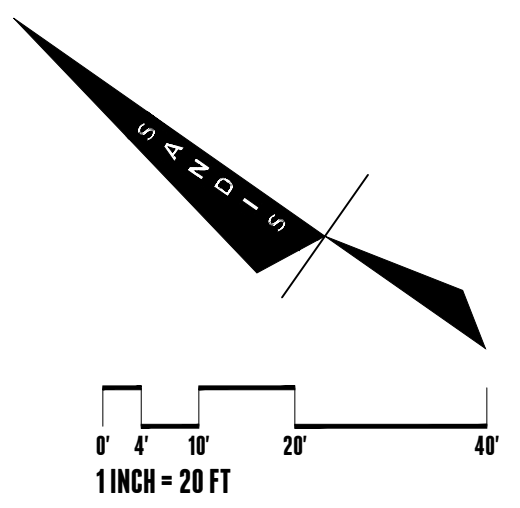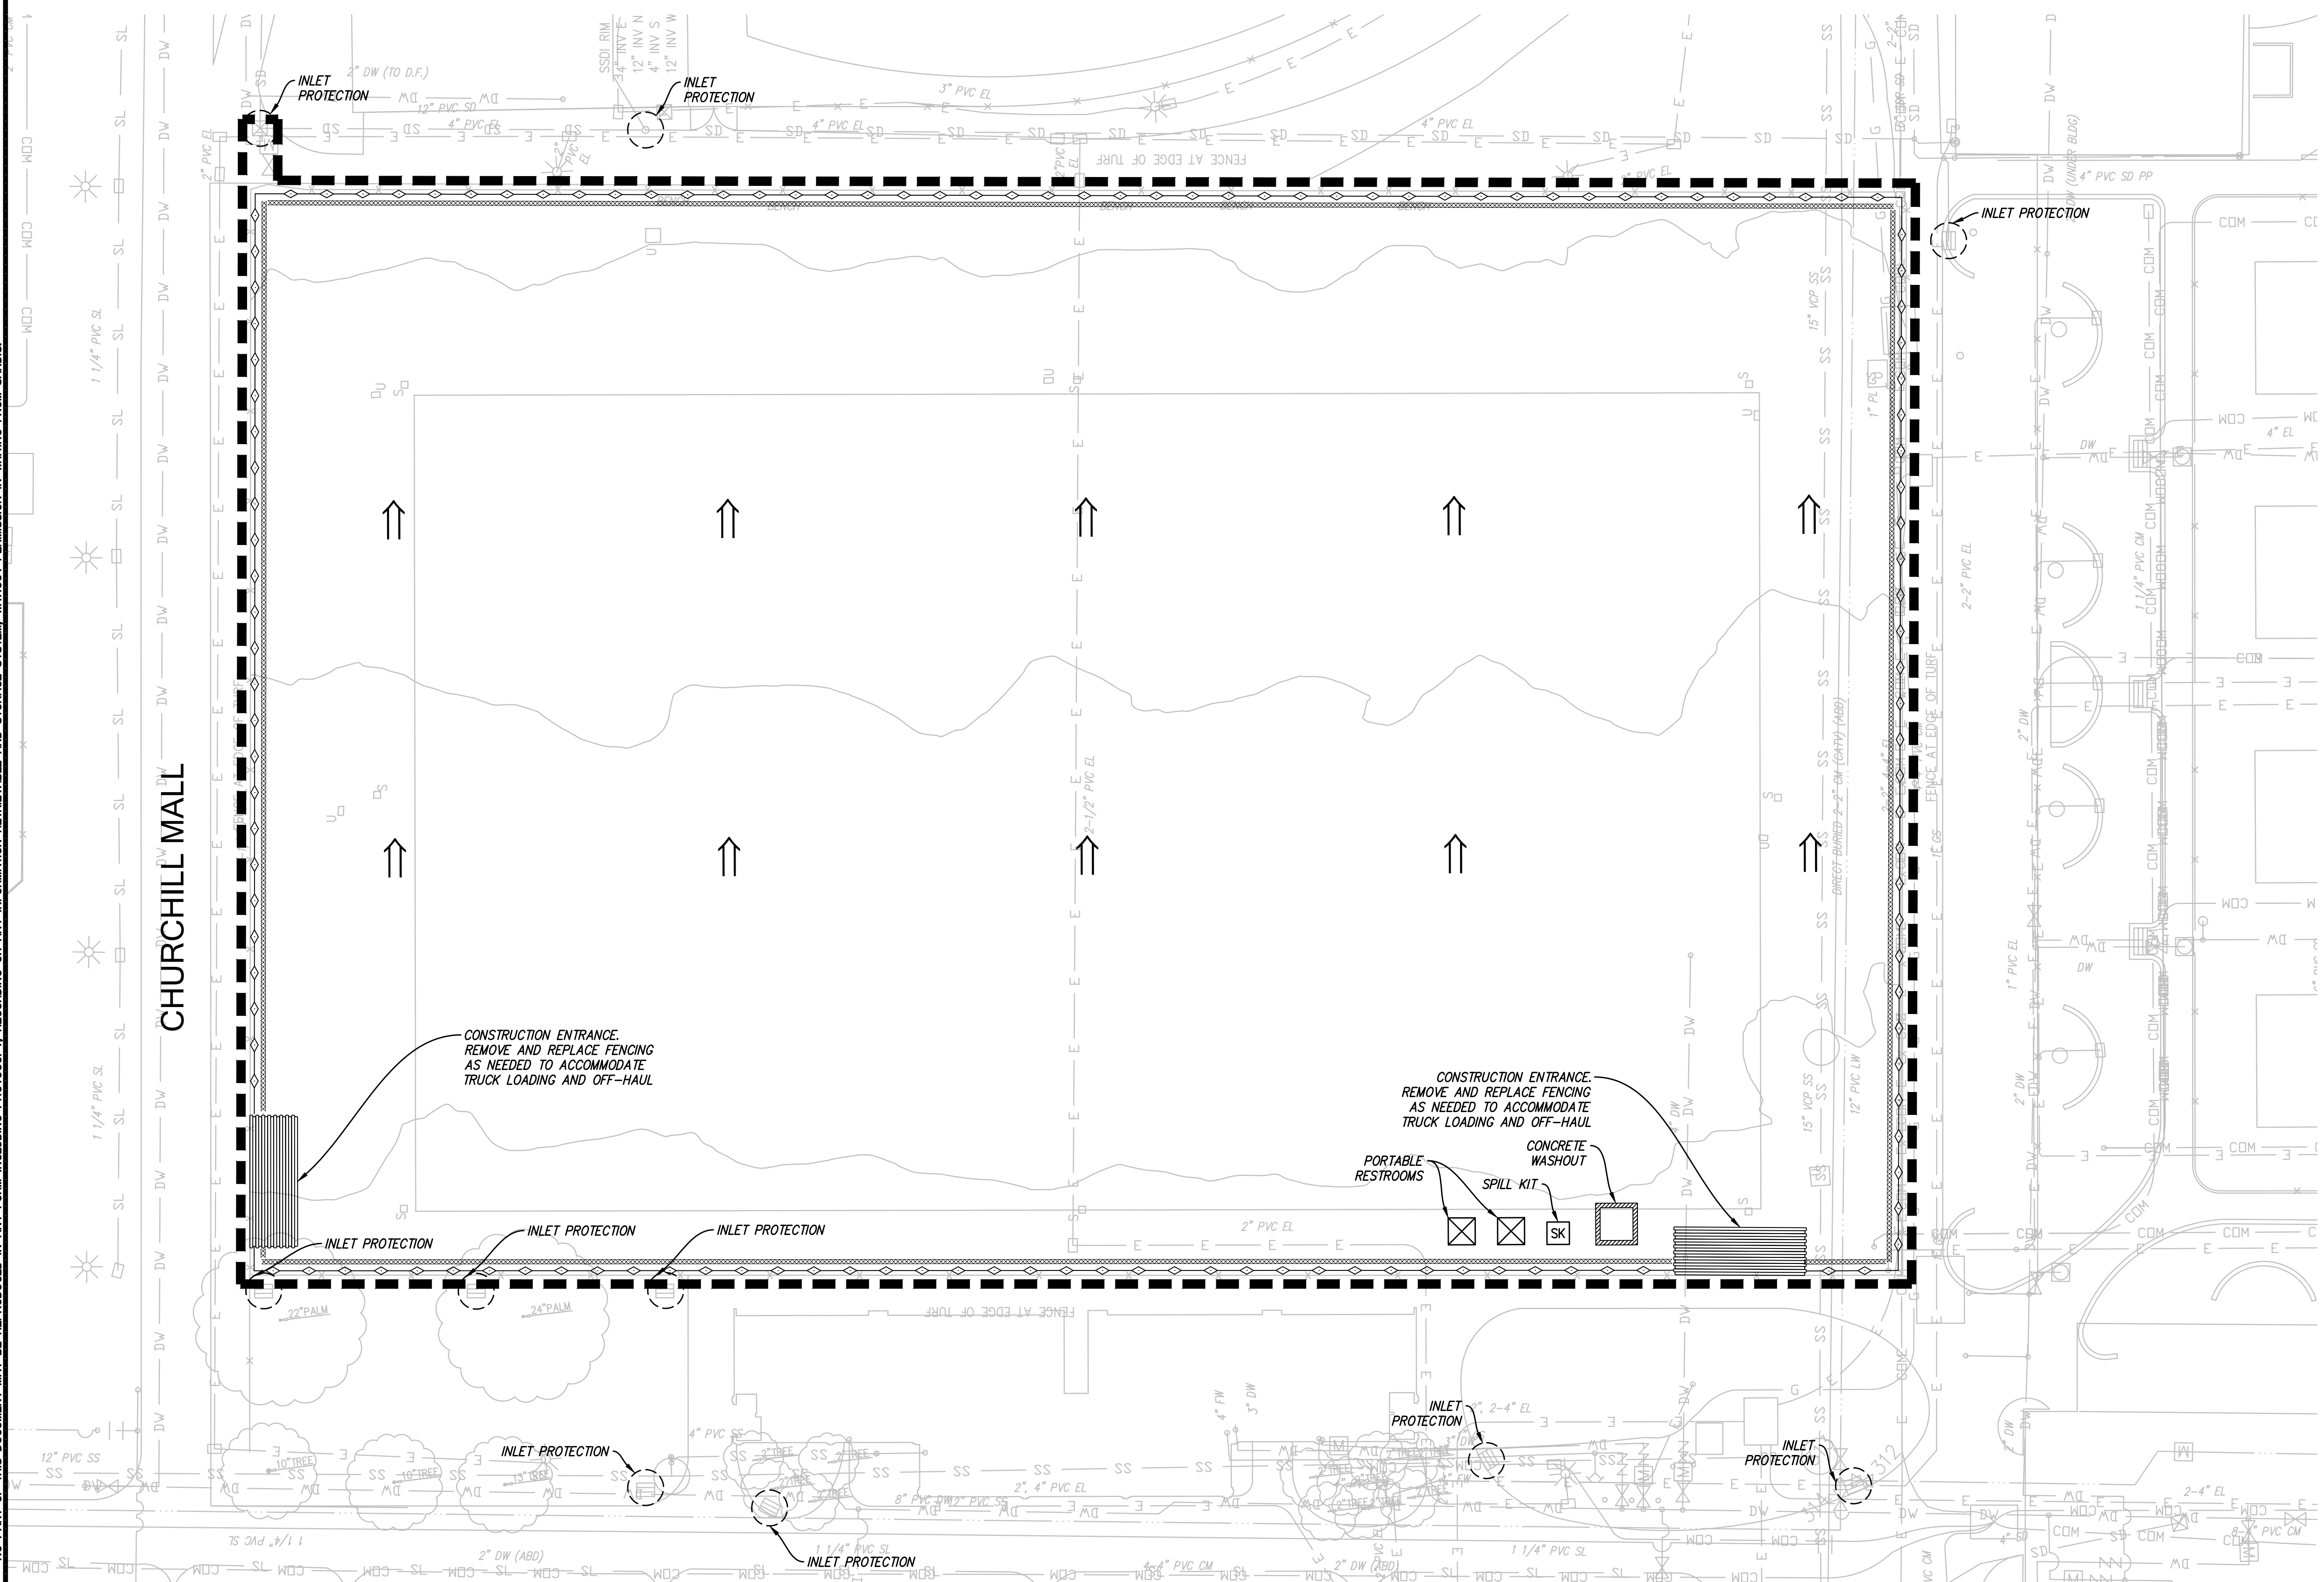SHEET
C-6.0
OF 13 SHEETS

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.



LEGEND

-  CONSTRUCTION ENTRANCE (3) (C-7.1)
-  CONCRETE WASHOUT (2) (C-7.2)
-  SPILL KIT
-  PORTABLE RESTROOM
-  PATH OF SURFACE DRAINAGE
-  SILT FENCE (1) (C-7.1)
-  FIBER ROLLS (1) (C-7.2)
-  INLET PROTECTION (4) (C-7.2)
-  APPROXIMATE AREA OF CONSTRUCTION DISTURBANCE

WATER POLLUTION CONTROL NOTES:

- A. THIS PROJECT DISTURBS MORE THAN 1 ACRE OF LAND AND WILL REQUIRE A SWPPP TO BE DEVELOPED UNDER THE STATE CONSTRUCTION GENERAL PERMIT.
- B. TEMPORARY CONSTRUCTION ENTRANCE/EXIT LOCATION SHOWN IS APPROXIMATE. CONTRACTOR TO PROVIDE LOCATION WHERE APPROPRIATE.
- C. THIS PLAN REPRESENTS POSSIBLE WATER POLLUTION CONTROL MEASURES INCLUDING EROSION CONTROL AND SEDIMENT CONTROL.
- D. EXISTING SURFACES SHALL BE UNDISTURBED TO THE EXTENT PRACTICAL.
- E. GROUND WATER SHALL NOT BE DISCHARGED WITH STORM WATER. GROUND WATER DEWATERING OPERATIONS SHALL BE COORDINATED AS NEEDED WITH OWNER.
- F. CONTRACTOR SHALL PROVIDE EFFECTIVE SOIL COVER FOR AREAS OF CONSTRUCTION ACTIVITY THAT HAVE BEEN DISTURBED AND ARE NOT SCHEDULED TO BE ACTIVE FOR AT LEAST 14 DAYS.
- G. ALL EROSION CONTROL AND SEDIMENT CONTROLS TO BE OBTAINED INSTALLED AND MAINTAINED AS REQUIRED IN PROJECT SWPPP.
- H. CONTRACTOR TO INSTALL RUN-ON AND RUN-OFF CONTROL MEASURES ACCORDING TO PLANS OR AS NECESSARY TO ENSURE SEDIMENT IS NOT TRANSPORTED FROM SITE.
- I. CONTRACTOR TO PROVIDE BACK-UP EROSION PREVENTION MEASURES (SOIL STABILIZATION) WITH SEDIMENT CONTROL MEASURES SUCH AS STRAW WATTLES, SILT FENCE, GRAVEL INLET FILTERS, AND/OR SEDIMENT TRAPS OR BASINS. ENSURE CONTROL MEASURES ARE ADEQUATE, IN PLACE, AND IN OPERABLE CONDITIONS. SEDIMENT CONTROLS, INCLUDING INLET PROTECTION, ARE NECESSARY BUT SHOULD BE A SECONDARY DEFENSE BEHIND GOOD EROSION CONTROL MEASURES.
- J. STOCKPILE LOCATION(S) TO BE DETERMINED BY THE CONTRACTOR. COORDINATE WITH SITE QSP.
- K. ALL CONCRETE TRUCKS TO USE CHUTE WASH BUCKETS FOR CONCRETE RINSE, ALL CONCRETE PUMPS TO CAPTURE CONCRETE RINSE IN SECONDARY CONTAINMENT AND PROPERLY DISPOSE.
- L. STREET SWEEPING SHALL BE CHECKED DAILY TO ENSURE DEPOSITED SEDIMENT AND DEBRIS DOES NOT ENTER THE STORM DRAIN SYSTEM. USE REGENERATIVE VACUUM STREET CLEANER TO MITIGATE AIR AND WATER POLLUTION.
- L. RUNOFF THAT HAS CONTACTED AMENDED SOIL AREAS SHALL NOT BE ALLOWED TO LEAVE THE SITE OR ENTER THE STORM DRAIN SYSTEM.



BUILD ON.
SANDIS.NET

DATE: 11/27/2023
SCALE: 1"=20'
PROJECT No.: 222518.A

DATE: NOVEMBER 27, 2023
NATHAN DICKINSON
R.C.E. NO. 79716, EXPIRES 9-30-24



No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST


FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT
STANFORD CALIFORNIA

EROSION CONTROL PLAN


SHEET
C-7.0

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.


3 Stabilized Construction Entrance/Exit CASQA Detail TC-1

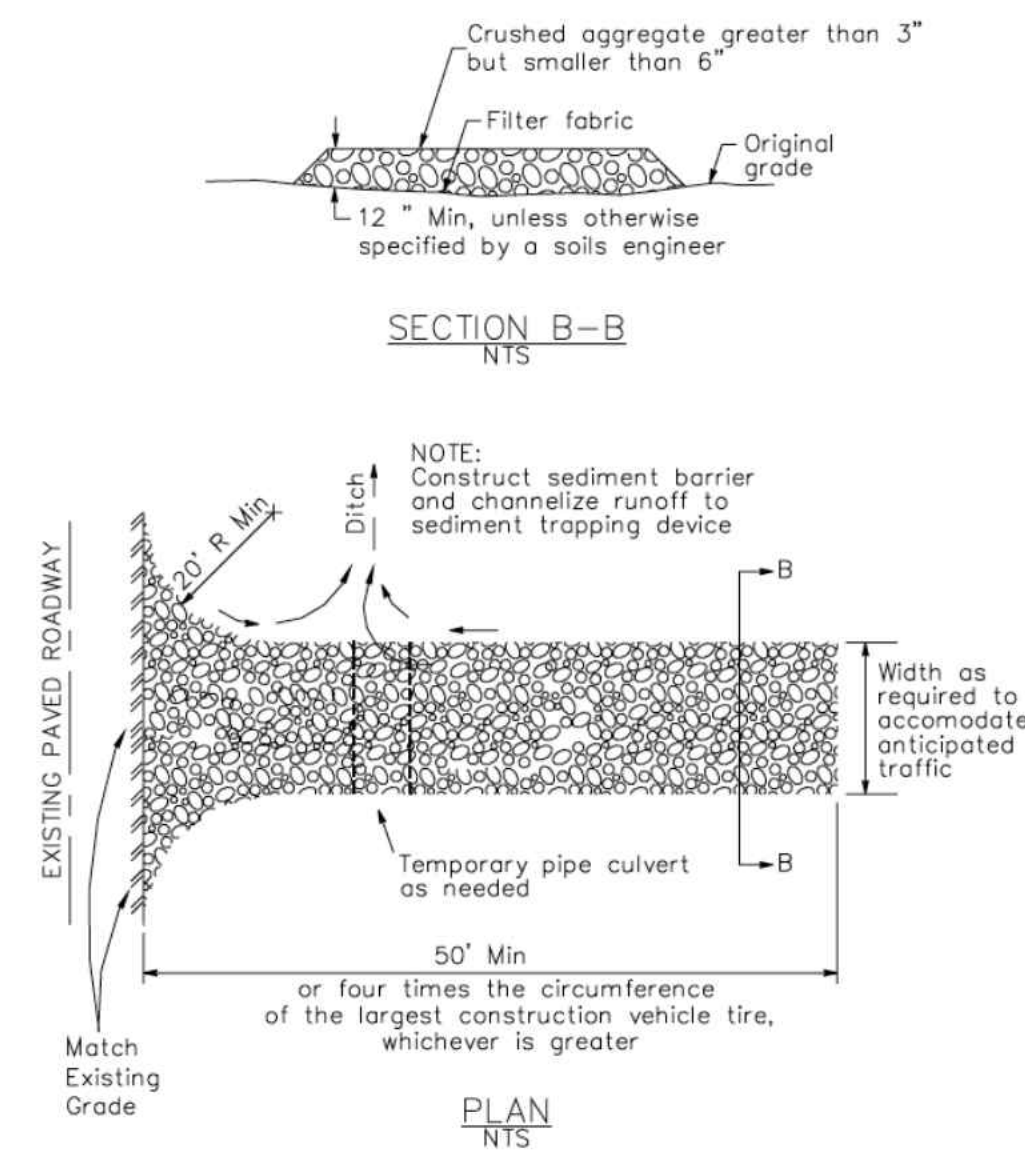


1 Silt Fence CASQA Detail SE-1

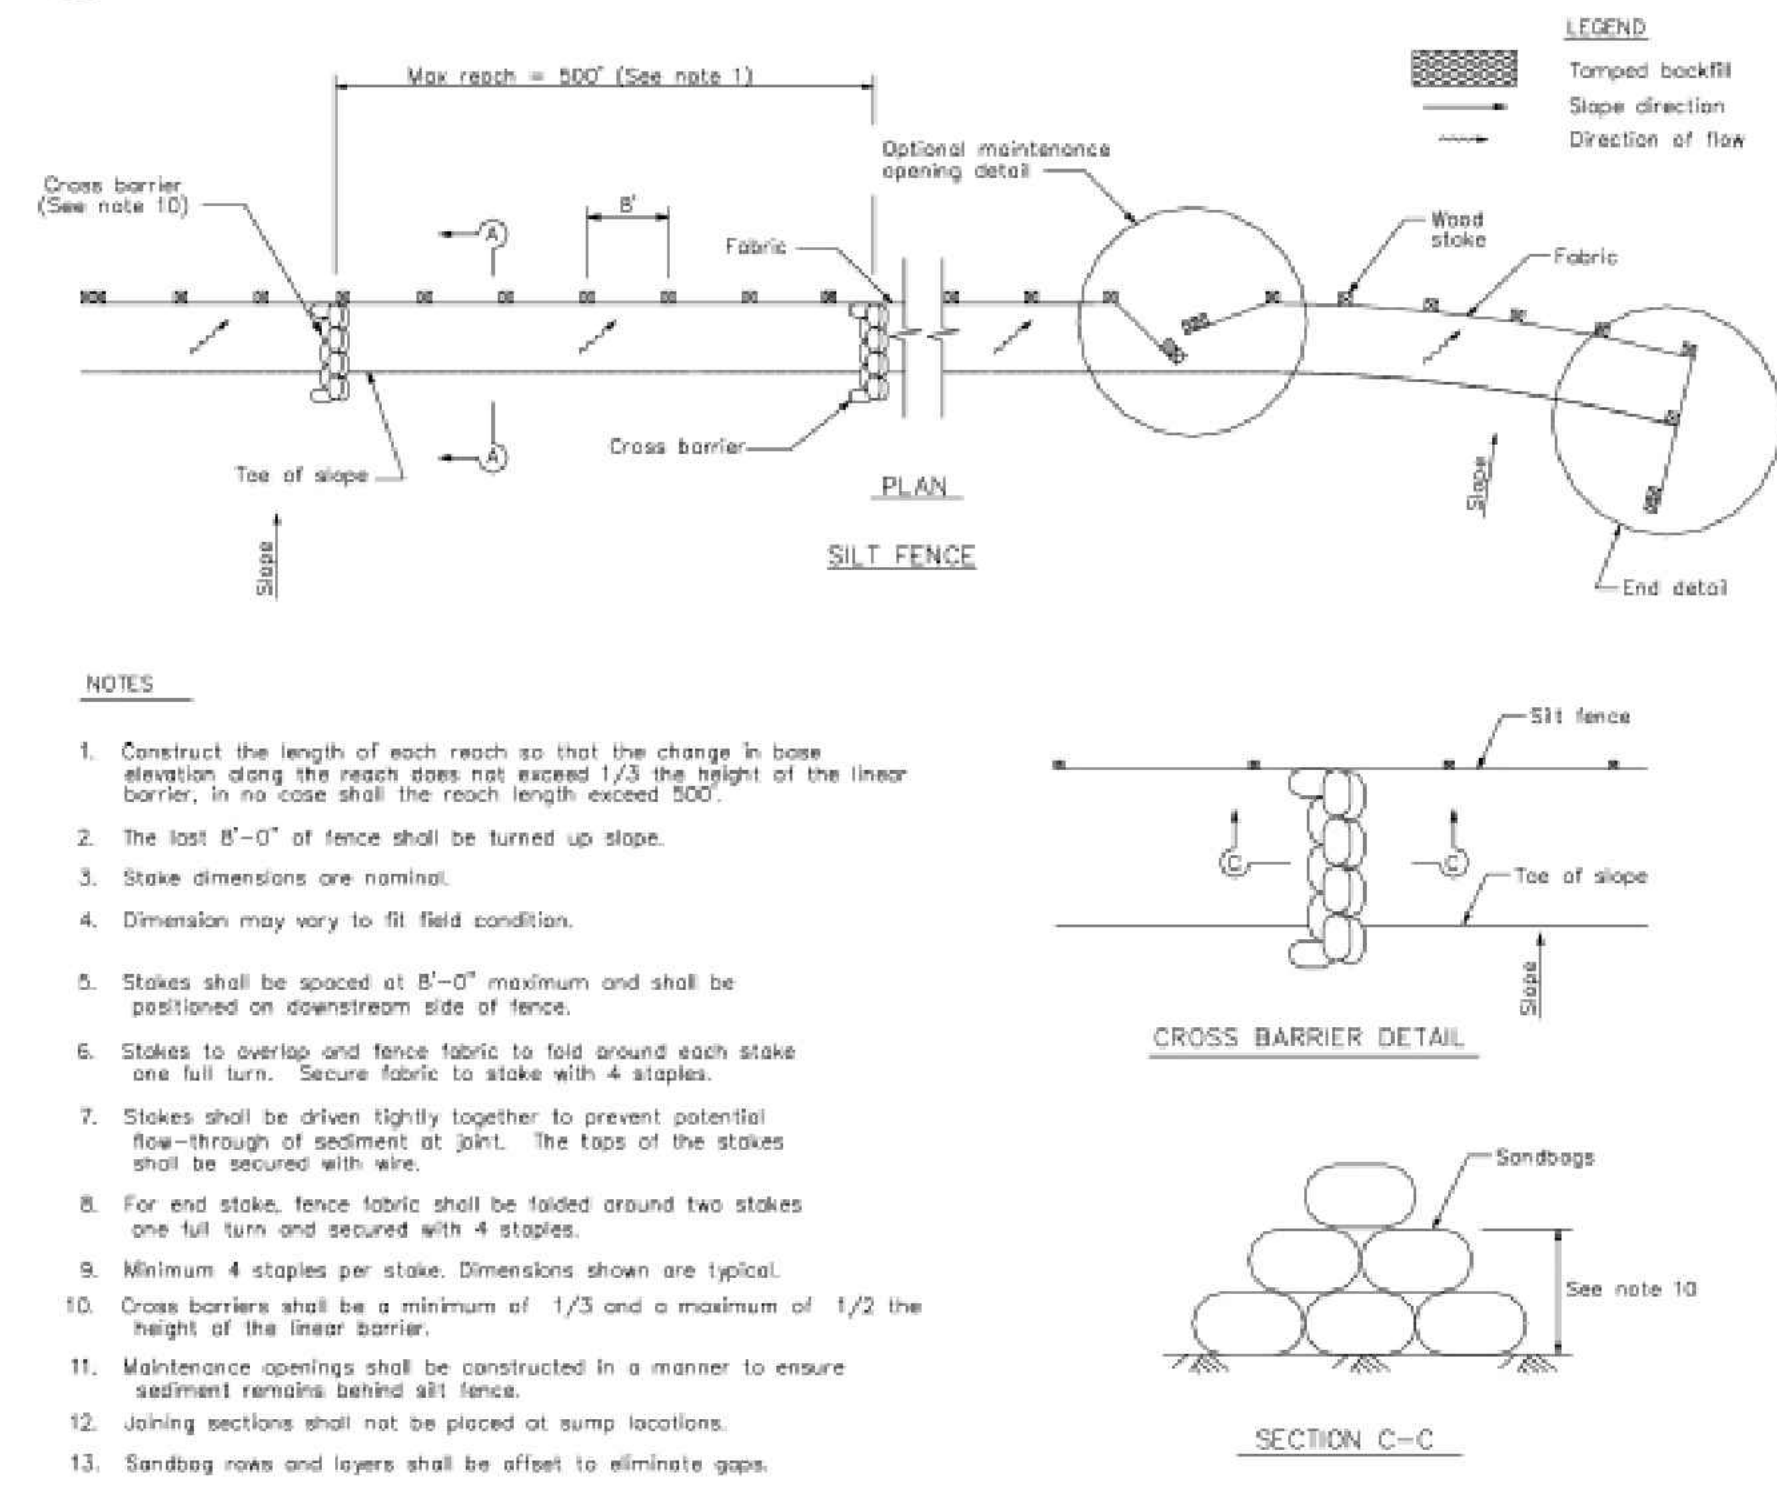

4 Velocity Dissipation Devices CASQA Detail EC-10

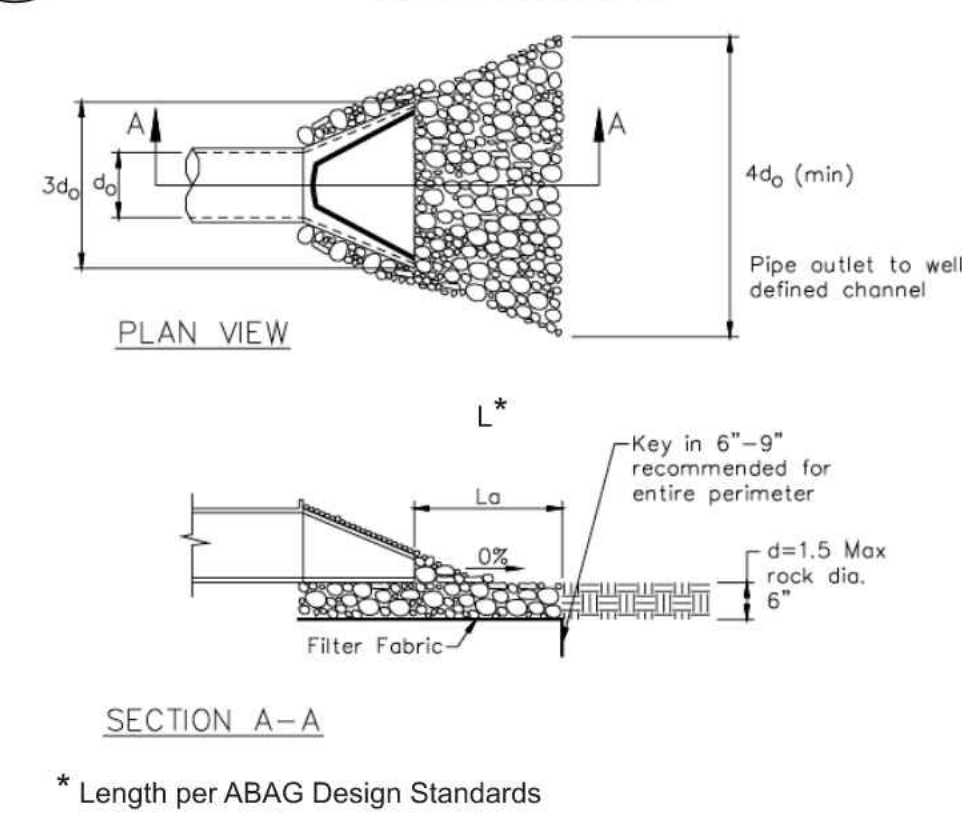

2 Silt Fence CASQA Detail SE-1

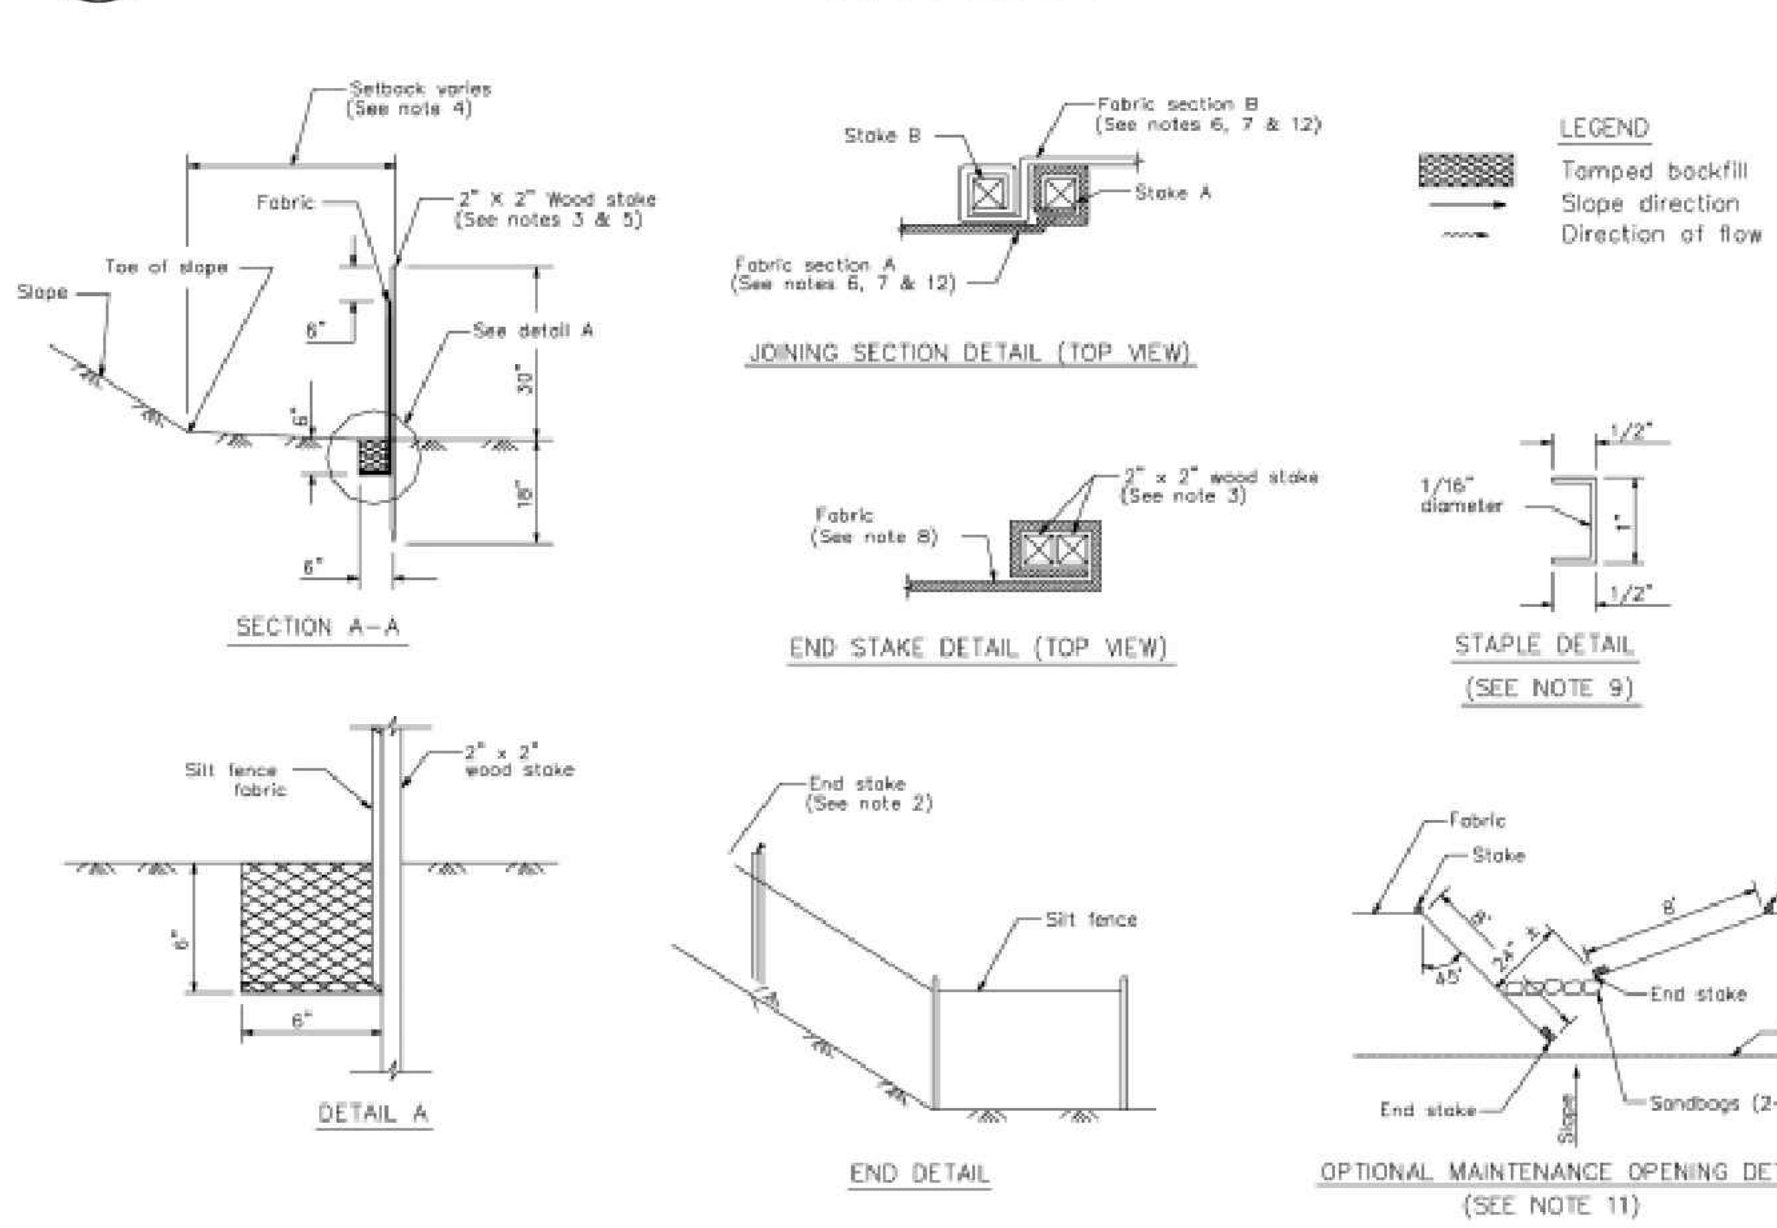

STANDARD BEST MANAGEMENT PRACTICE NOTES

- Solid and Demolition Waste Management:** Provide designated waste collection areas and containers on site away from streets, gutters, storm drains, and waterways, and arrange for regular disposal. Waste containers must be watertight and covered at all times except when waste is deposited. Refer to Erosion & Sediment Control Field Manual, 4th Edition (page C-3) or latest.
- Hazardous Waste Management:** Provide proper handling and disposal of hazardous wastes by a licensed hazardous waste material hauler. Hazardous wastes shall be stored and properly labeled in sealed containers constructed of suitable materials. Refer to Erosion & Sediment Control Field Manual, 4th Edition (pages C-5 to C-6) or latest.
- Spill Prevention and Control:** Provide proper storage areas for liquid and solid materials, including chemicals and hazardous substances, away from streets, gutters, storm drains, and waterways. Spill control materials must be kept on site where readily accessible. Spills must be cleaned up immediately and contaminated soil disposed properly. Refer to Erosion & Sediment Control Field Manual, 4th Edition (pages C-7 to C-8, C-13 to C-14) or latest.
- Vehicle and Construction Equipment Service and Storage:** An area shall be designated for the maintenance, where on-site maintenance is required, and storage of equipment that is protected from stormwater run-on and runoff. Measures shall be provided to capture any waste oils, lubricants, or other potential pollutants and these wastes shall be properly disposed of off site. Fueling and major maintenance/repair, and washing shall be conducted off-site whenever feasible. Refer to Erosion & Sediment Control Field Manual, 4th Edition (page C-9) or latest.
- Material Delivery, Handling and Storage:** In general, materials should not be stockpiled on site. Where temporary stockpiles are necessary and approved by the County, they shall be covered with secured plastic sheeting or tarp and located in designated areas near construction entrances and away from drainage paths and waterways. Barriers shall be provided around storage areas where materials are potentially in contact with runoff. Refer to Erosion & Sediment Control Field Manual, 4th Edition (pages C-11 to C-12) or latest.
- Handling and Disposal of Concrete and Cement:** When concrete trucks and equipment are washed on-site, concrete wastewater shall be contained in designated containers or in a temporary lined and watertight pit where wasted concrete can harden for later removal. If possible have concrete contractor remove concrete wash water from site. In no case shall fresh concrete be washed into the road right-of-way. Refer to Erosion & Sediment Control Field Manual, 4th Edition (pages C-15 to C-16) or latest.
- Pavement Construction Management:** Prevent or reduce the discharge of pollutants from paving operations, using measures to prevent run-on and runoff pollution and properly disposing of wastes. Avoid paving in the wet season and reschedule paving when rain is in the forecast. Residue from saw-cutting shall be vacuumed for proper disposal. Refer to Erosion & Sediment Control Field Manual, 4th Edition (pages C-17 to C-18) or latest.
- Contaminated Soil and Water Management:** Inspections to identify contaminated soils should occur prior to construction and at regular intervals during construction. Remediating contaminated soil should occur promptly after identification and be specific to the contaminant identified, which may include hazardous waste removal. Refer to Erosion & Sediment Control Field Manual, 4th Edition (pages C-19 to C-20) or latest.
- Sanitary/Septic Water Management:** Temporary sanitary facilities should be located away from drainage paths, waterways, and traffic areas. Only licensed sanitary and septic waste haulers should be used. Secondary containment should be provided for all sanitary facilities. Refer to Erosion & Sediment Control Field Manual, 4th Edition (page C-21) or latest.
- Inspection & Maintenance:** Areas of material and equipment storage sites and temporary sanitary facilities must be inspected weekly. Problem areas shall be identified and appropriate additional and/or alternative control measures implemented immediately, within 24 hours of the problem being identified.

STANDARD EROSION CONTROL NOTES

- Sediment Control Management:**
 - Tracking Prevention & Clean Up:** Activities shall be organized and measures taken as needed to prevent or minimize tracking of soil onto the public street system. A gravel or proprietary device construction entrance/exit is required for all sites. Clean up of tracked material shall be provided by means of a street sweeper prior to an approaching rain event, or at least once at the end of each workday that material is tracked, or, more frequently as determined by the County Inspector. Refer to Erosion & Sediment Control Field Manual, 4th Edition (pages B-31 to B-33) or latest.
 - Storm Drain Inlet and Catch Basin Inlet Protection:** All inlets within the vicinity of the project and within the project limits shall be protected with gravel bags placed around inlets or other inlet protection. At locations where exposed soils are present, staked fiber rolls or staked silt fences can be used. Inlet filters are not allowed due to clogging and subsequent flooding. Refer to Erosion & Sediment Control Field Manual, 4th Edition (pages B-49 to B-51) or latest.
 - Storm Water Runoff:** No storm water runoff shall be allowed to drain in to the existing and/or proposed underground storm drain system or other above ground watercourses until appropriate erosion control measures are fully installed.
 - Dust Control:** The contractor shall provide dust control in graded areas as required by providing wet suppression or chemical stabilization of exposed soils, providing for rapid clean up of sediments deposited on paved roads, furnishing construction road entrances and vehicle wash down areas, and limiting the amount of areas disturbed by clearing and earth moving operations by scheduling these activities in phases.
 - Stockpiling:** Excavated soils shall not be placed in streets or on paved areas. Borrow and temporary stockpiles shall be protected with appropriate erosion control measures (tarps, straw bales, silt fences, etc.) to ensure silt does not leave the site or enter the storm drain system or neighboring watercourse.
- Erosion Control:** During the rainy season, all disturbed areas must include an effective combination of erosion and sediment control. It is required that temporary erosion control measures are applied to all disturbed soil areas prior to a rain event. During the non-rainy season, erosion control measures must be applied sufficient to control wind erosion at the site.
- Inspection & Maintenance:** Disturbed areas of the Project's site, locations where vehicles enter or exit the site, and all erosion and sediment controls that are identified as part of the Erosion Control Plans must be inspected by the Contractor before, during, and after storm events, and at least weekly during seasonal wet periods. Problem areas shall be identified and appropriate additional and/or alternative control measures implemented immediately, within 24 hours of the problem being identified.
- Project Completion:** Prior to project completion and signoff by the County Inspector, all disturbed areas shall be reseeded, planted, or landscaped to minimize the potential for erosion on the subject site.
- It shall be the Owner's/Contractor's responsibility to maintain control of the entire construction operation and to keep the entire site in compliance with the erosion control plan.
- Erosion and sediment control best management practices shall be operable year round or until vegetation is fully established on landscaped surfaces.

Project Information

Best Management Practices and Erosion Control Details Sheet 1 County of Santa Clara




BMP-1



BUILD ON.
SANDIS.NET

DATE: 11/27/2023
SCALE: N.T.S.
PROJECT No.: 222518.A

DATE: NOVEMBER 27, 2023
NATHAN DICKINSON
R.C.E. No. 79716, EXPIRES 9-30-24











No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST

FIELD HOCKEY FIELD BASE REPAIR
AND REPLACEMENT
STANFORD CALIFORNIA

EROSION CONTROL DETAILS

SHEET
C-7.1

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.

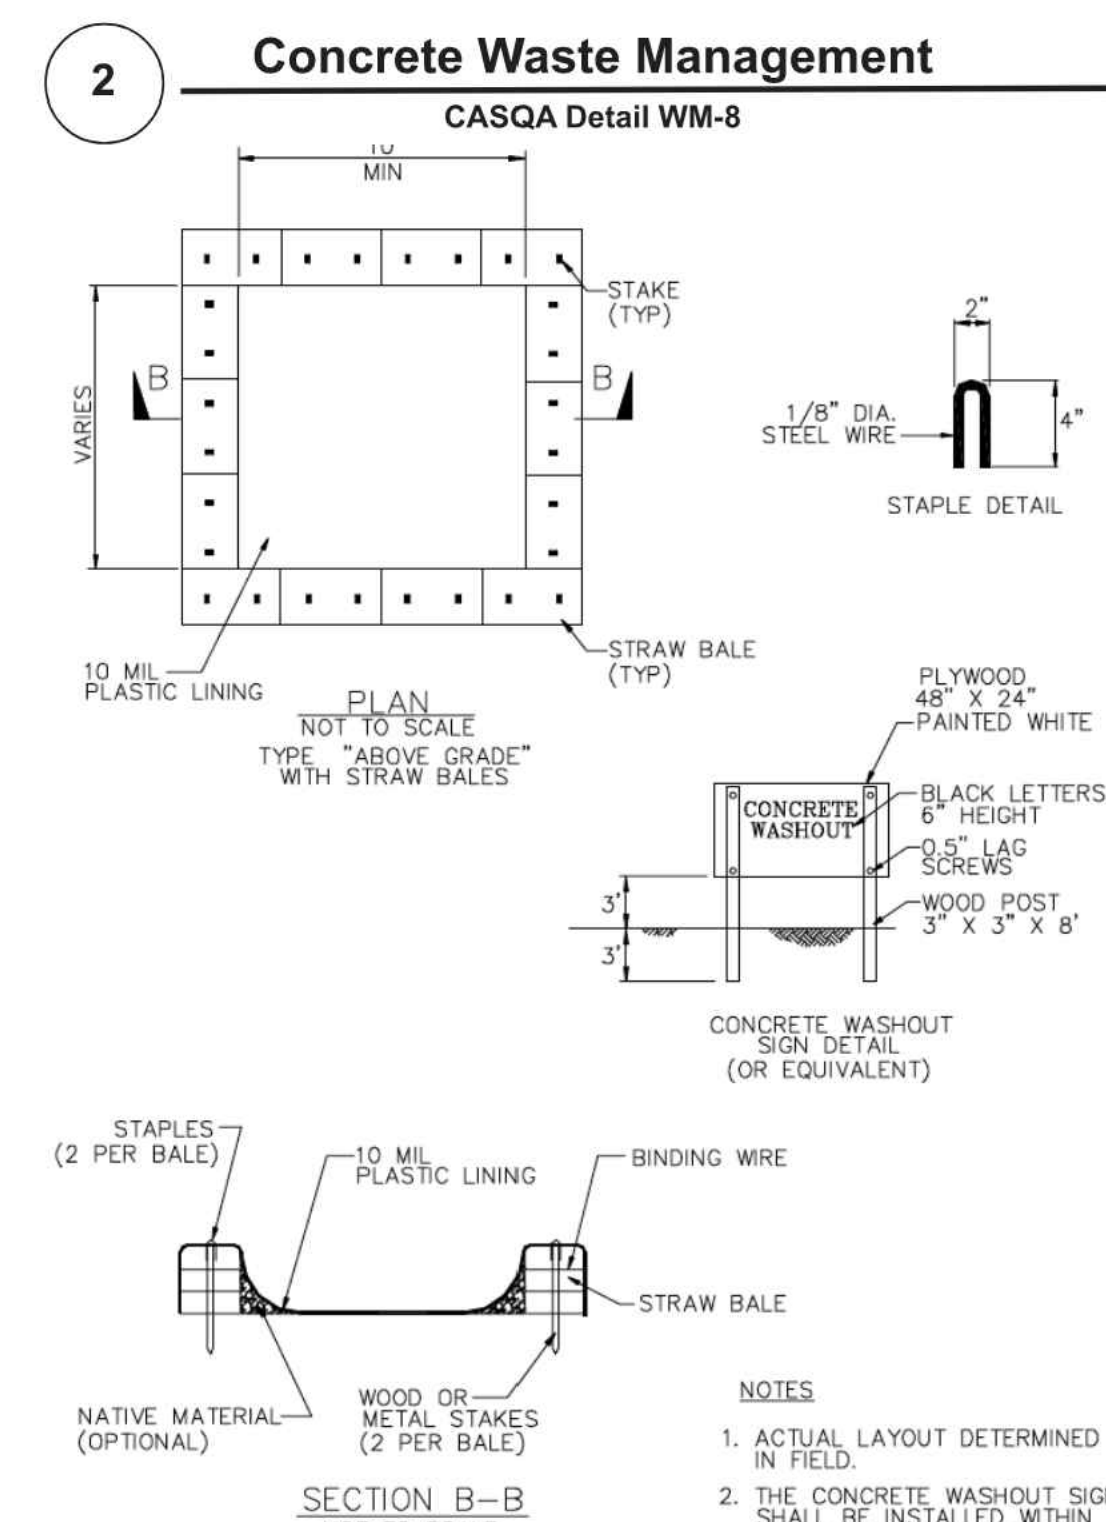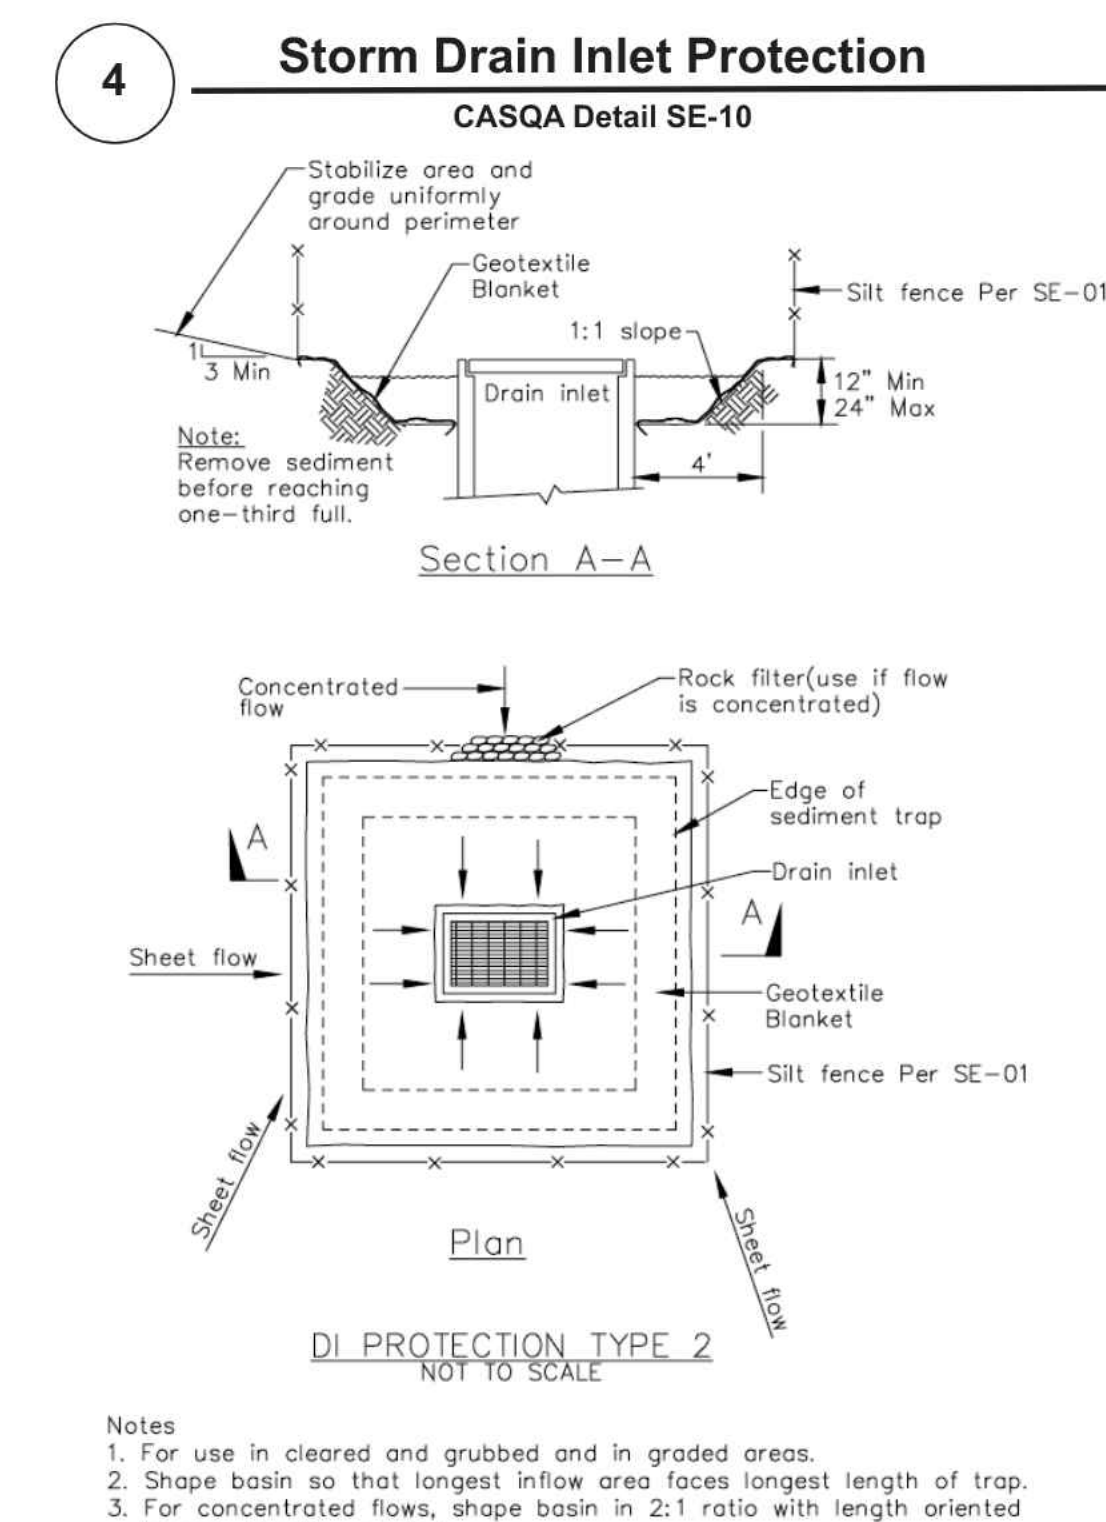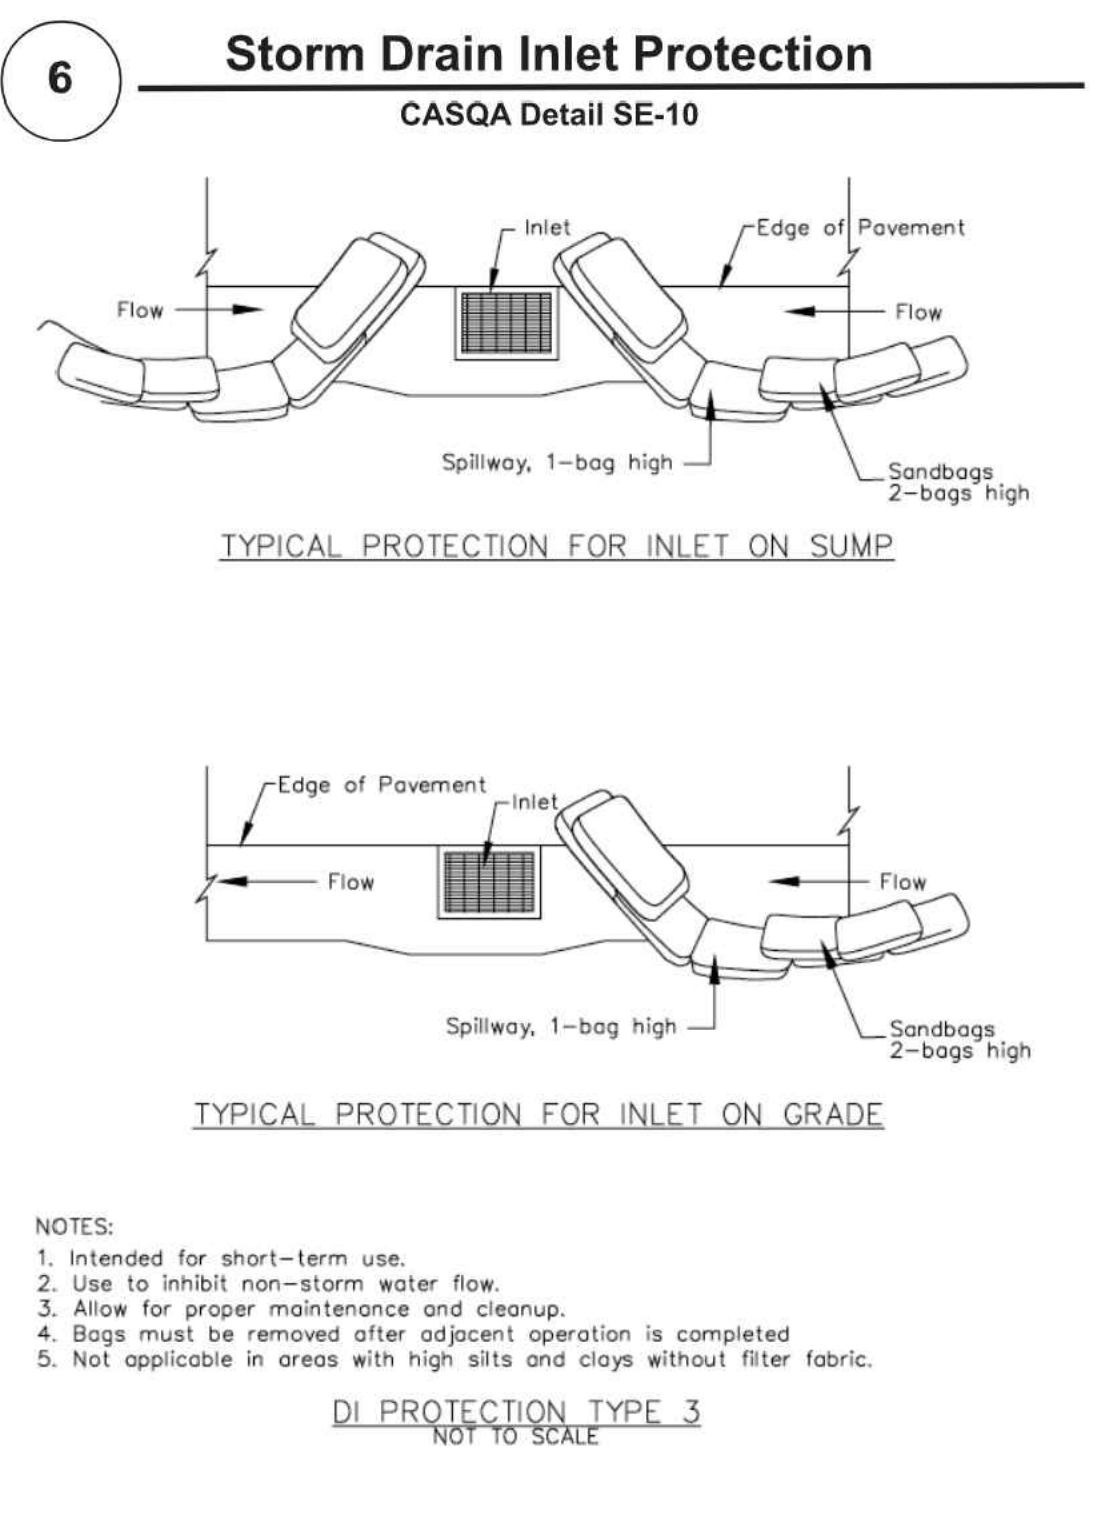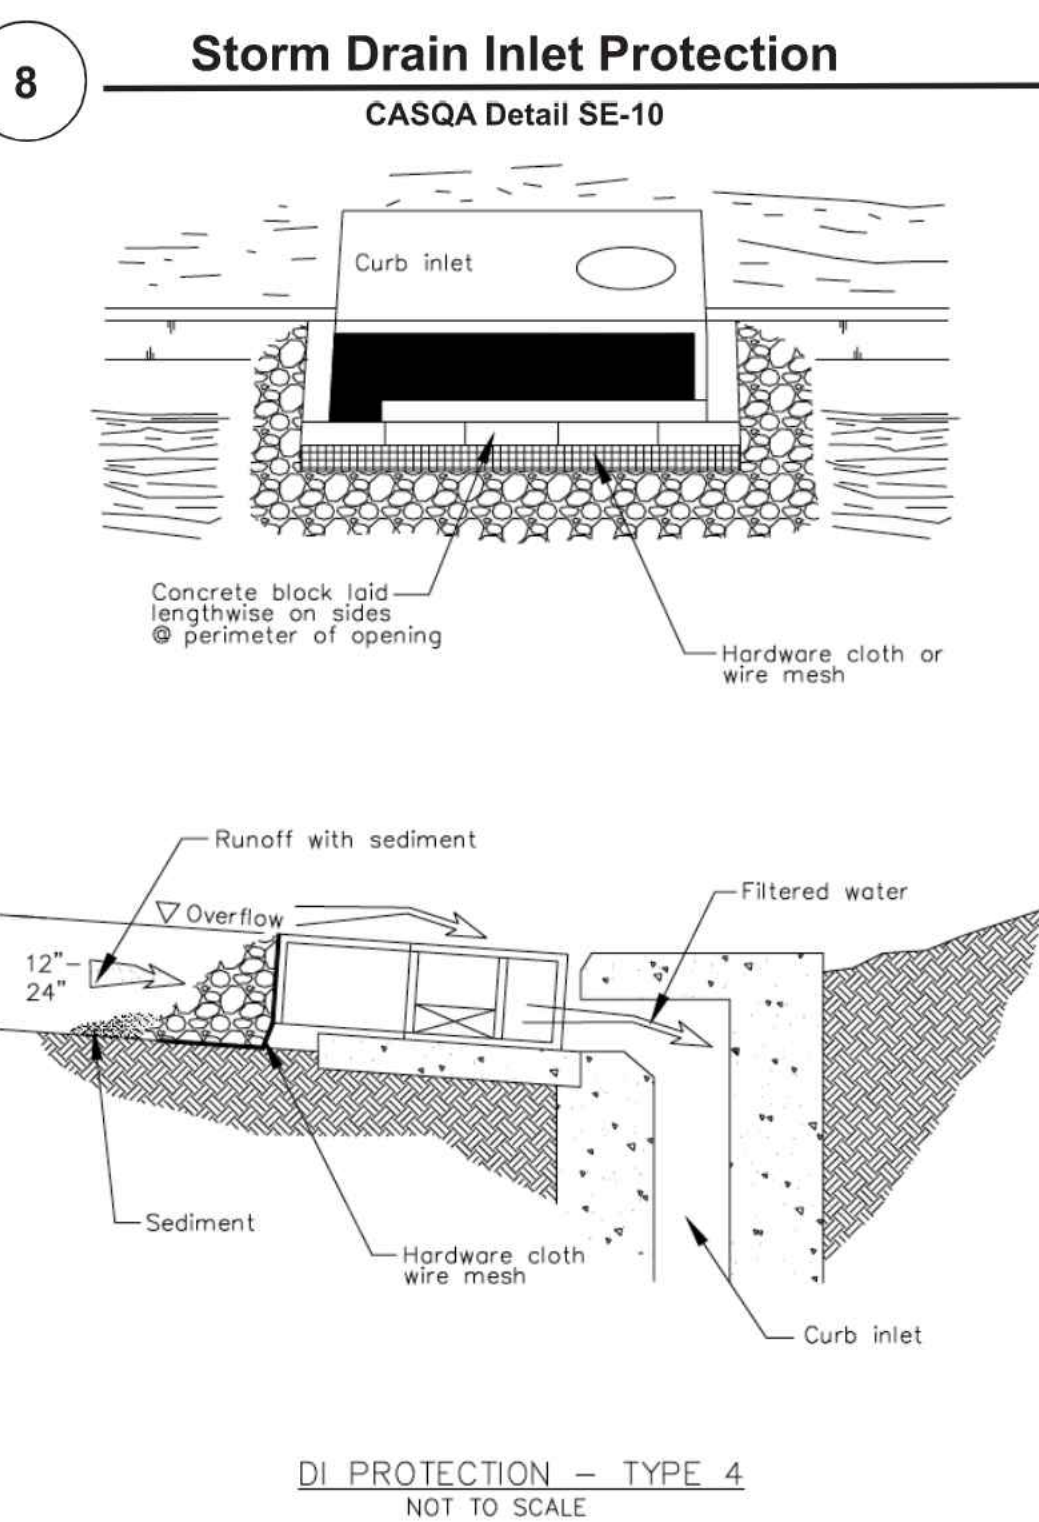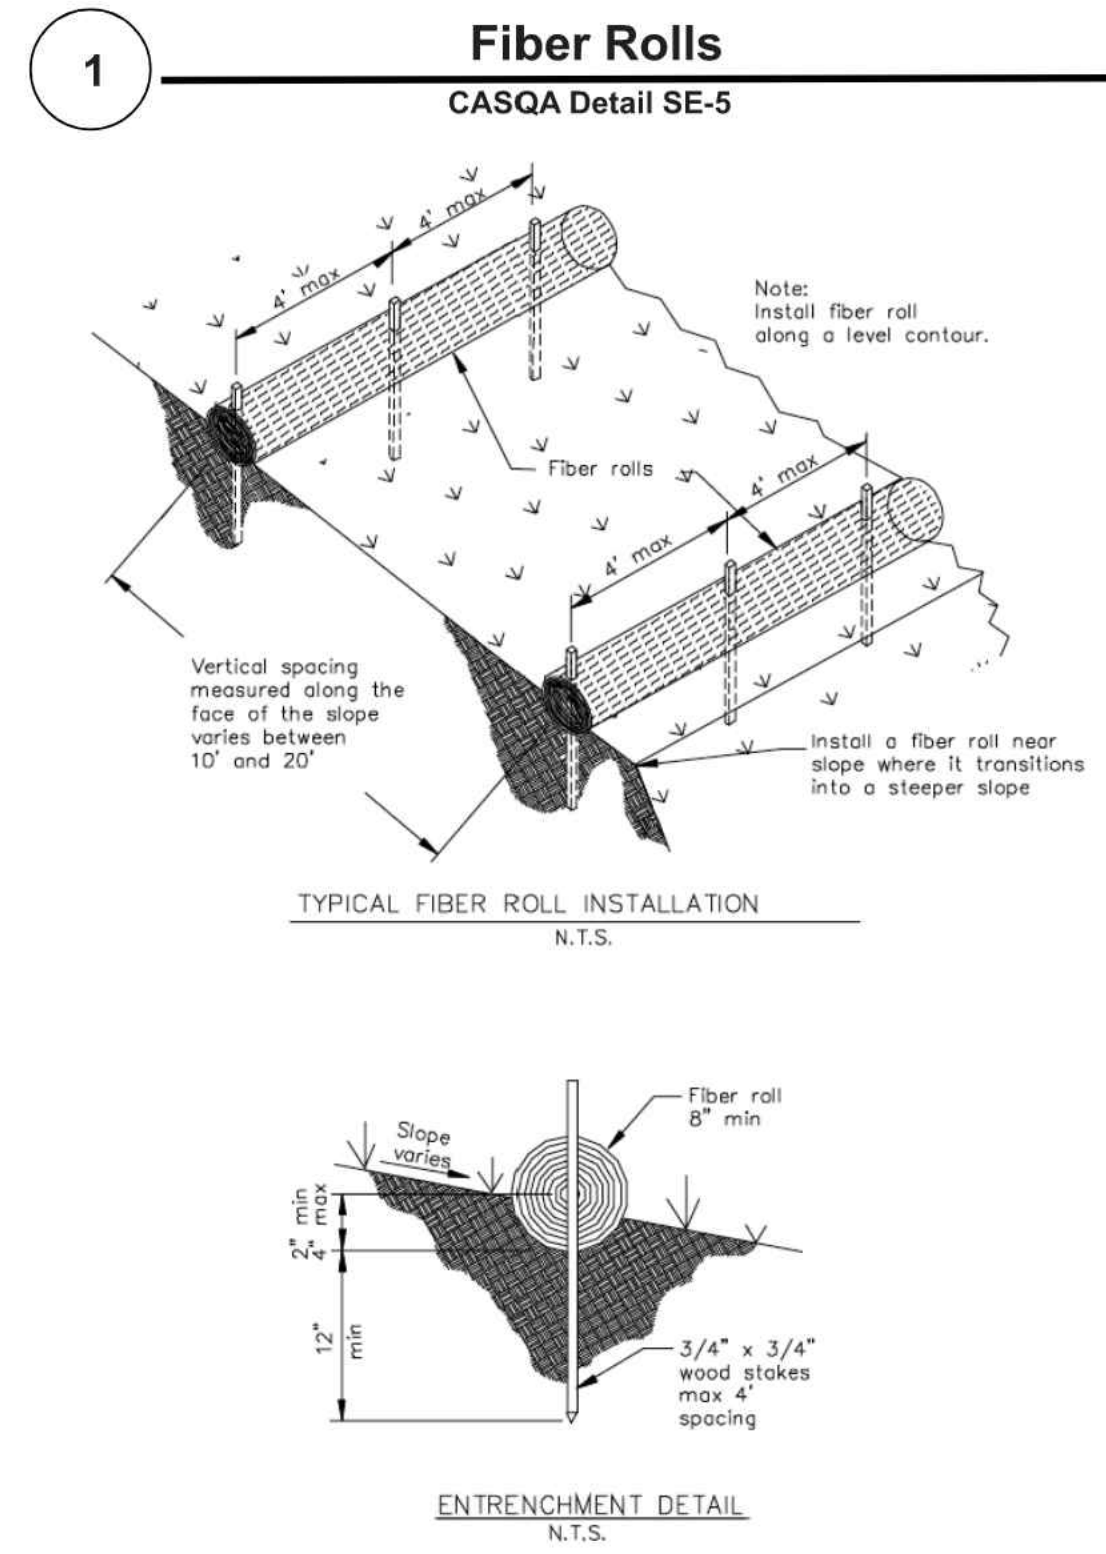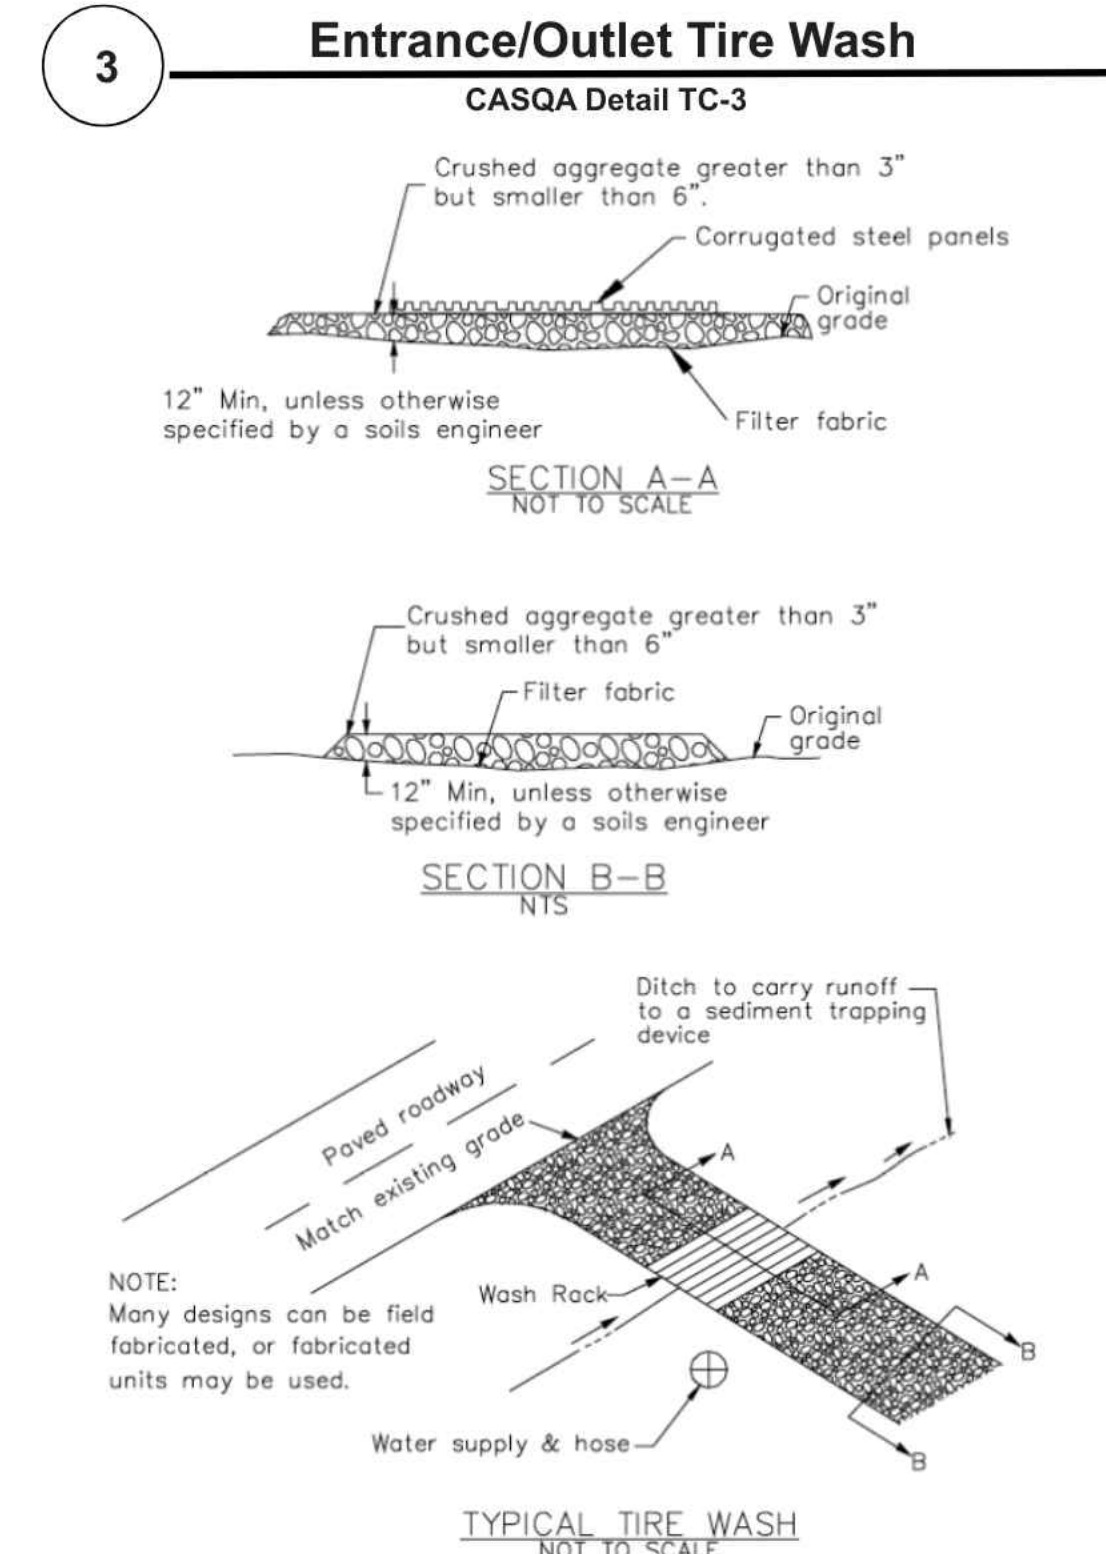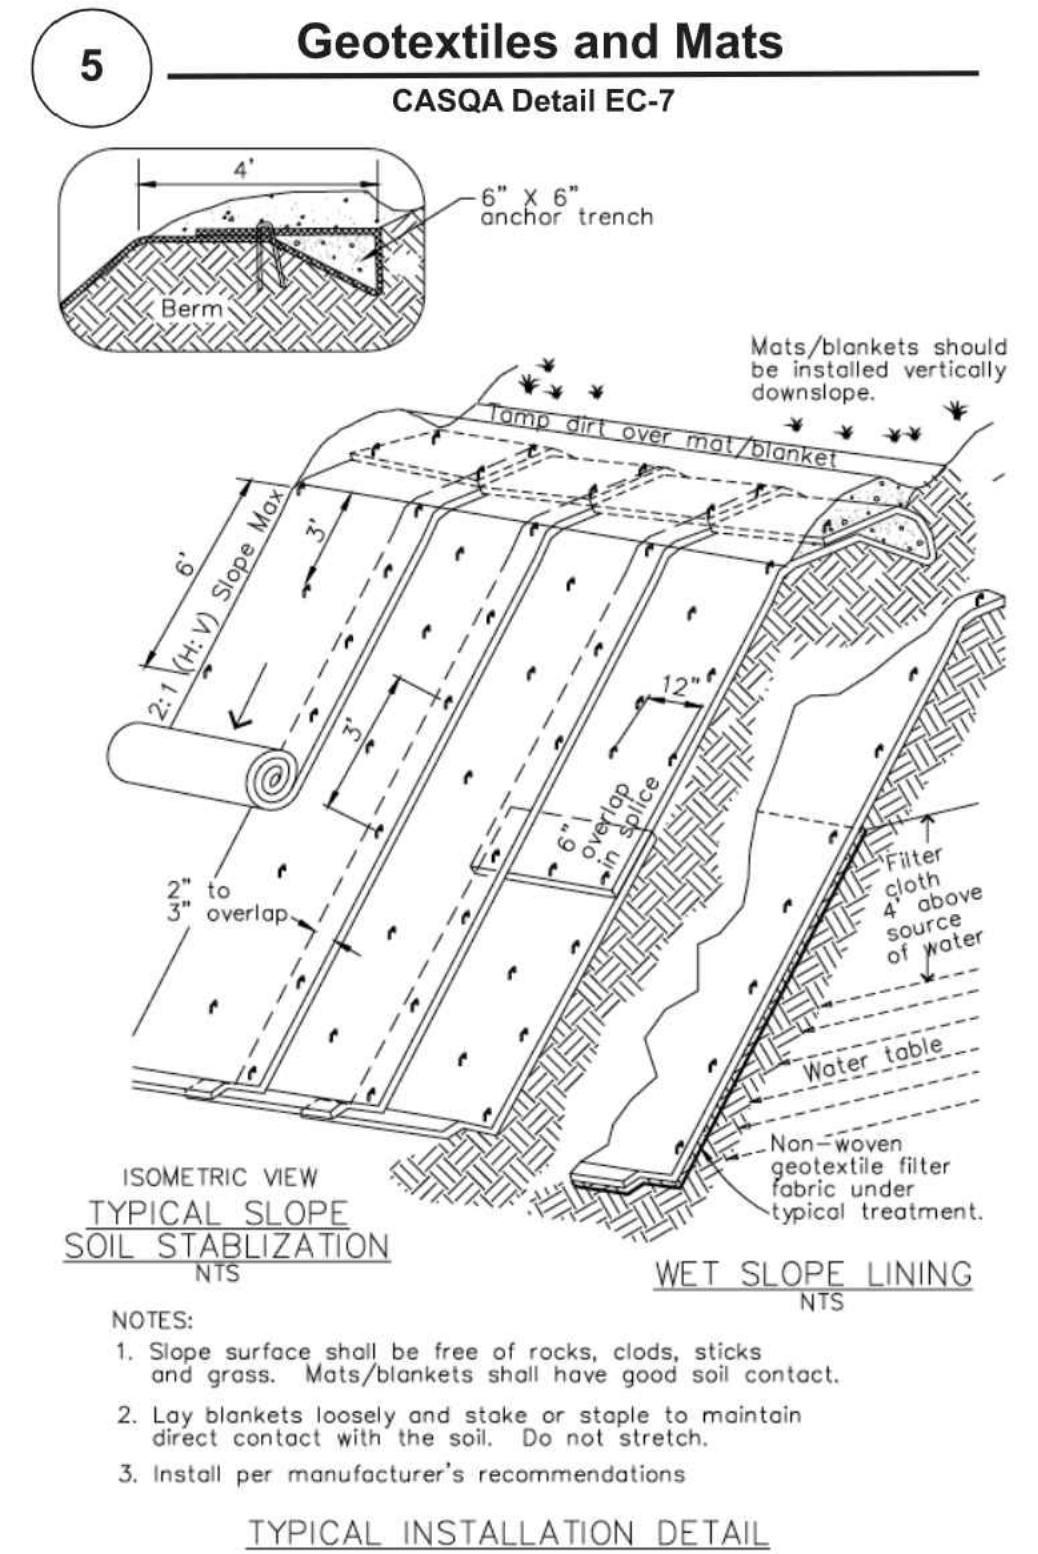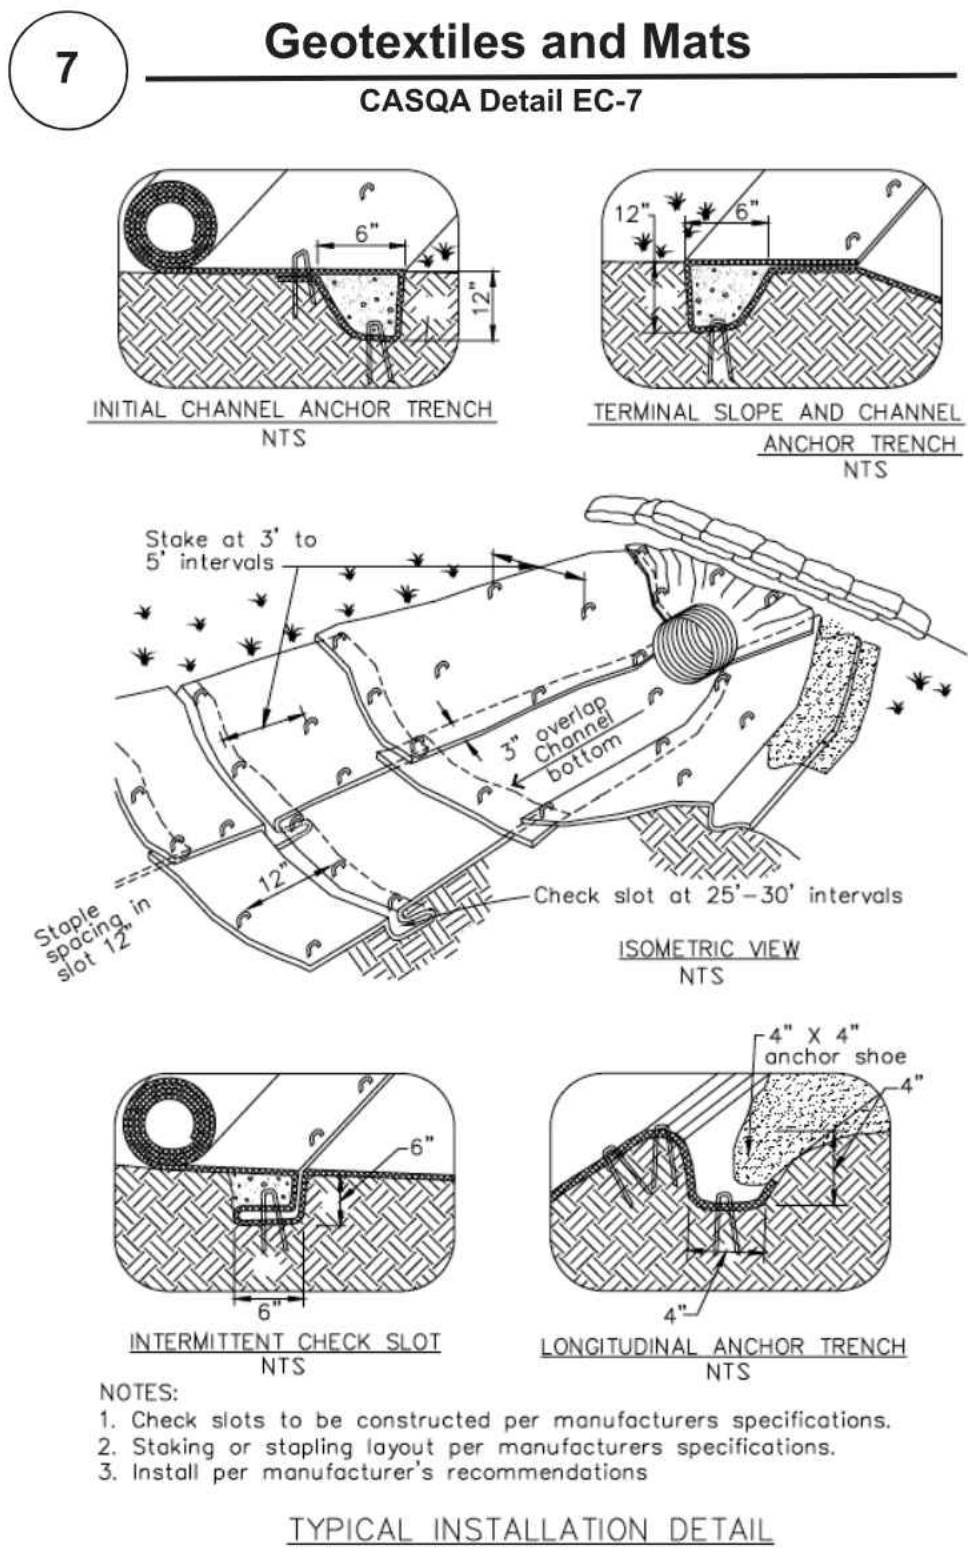

Project Information

Best Management Practices and Erosion Control Details Sheet 2
County of Santa Clara




BMP-2



BUILD ON.
SANDIS.NET

DATE: 11/27/2023
SCALE: N.T.S.
PROJECT No.: 222518.A

DATE: NOVEMBER 27, 2023
NATHAN DICKINSON
R.C.E. NO. 79716, EXPIRES 9-30-24






No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST

FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT
STANFORD CALIFORNIA

EROSION CONTROL DETAILS

SHEET
C-7.2

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.

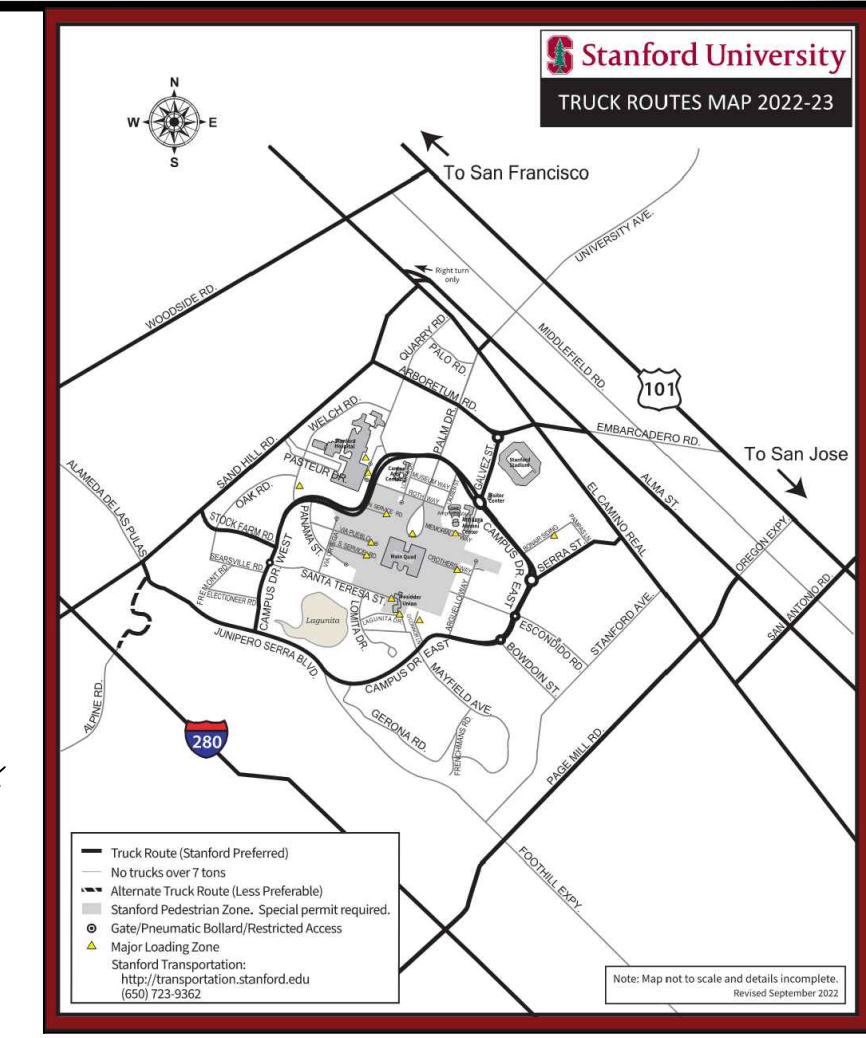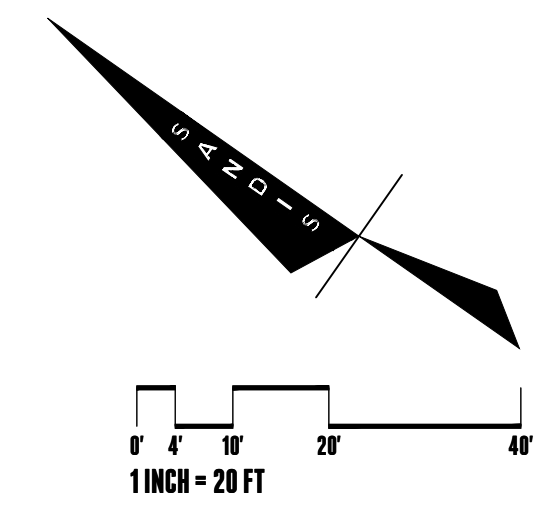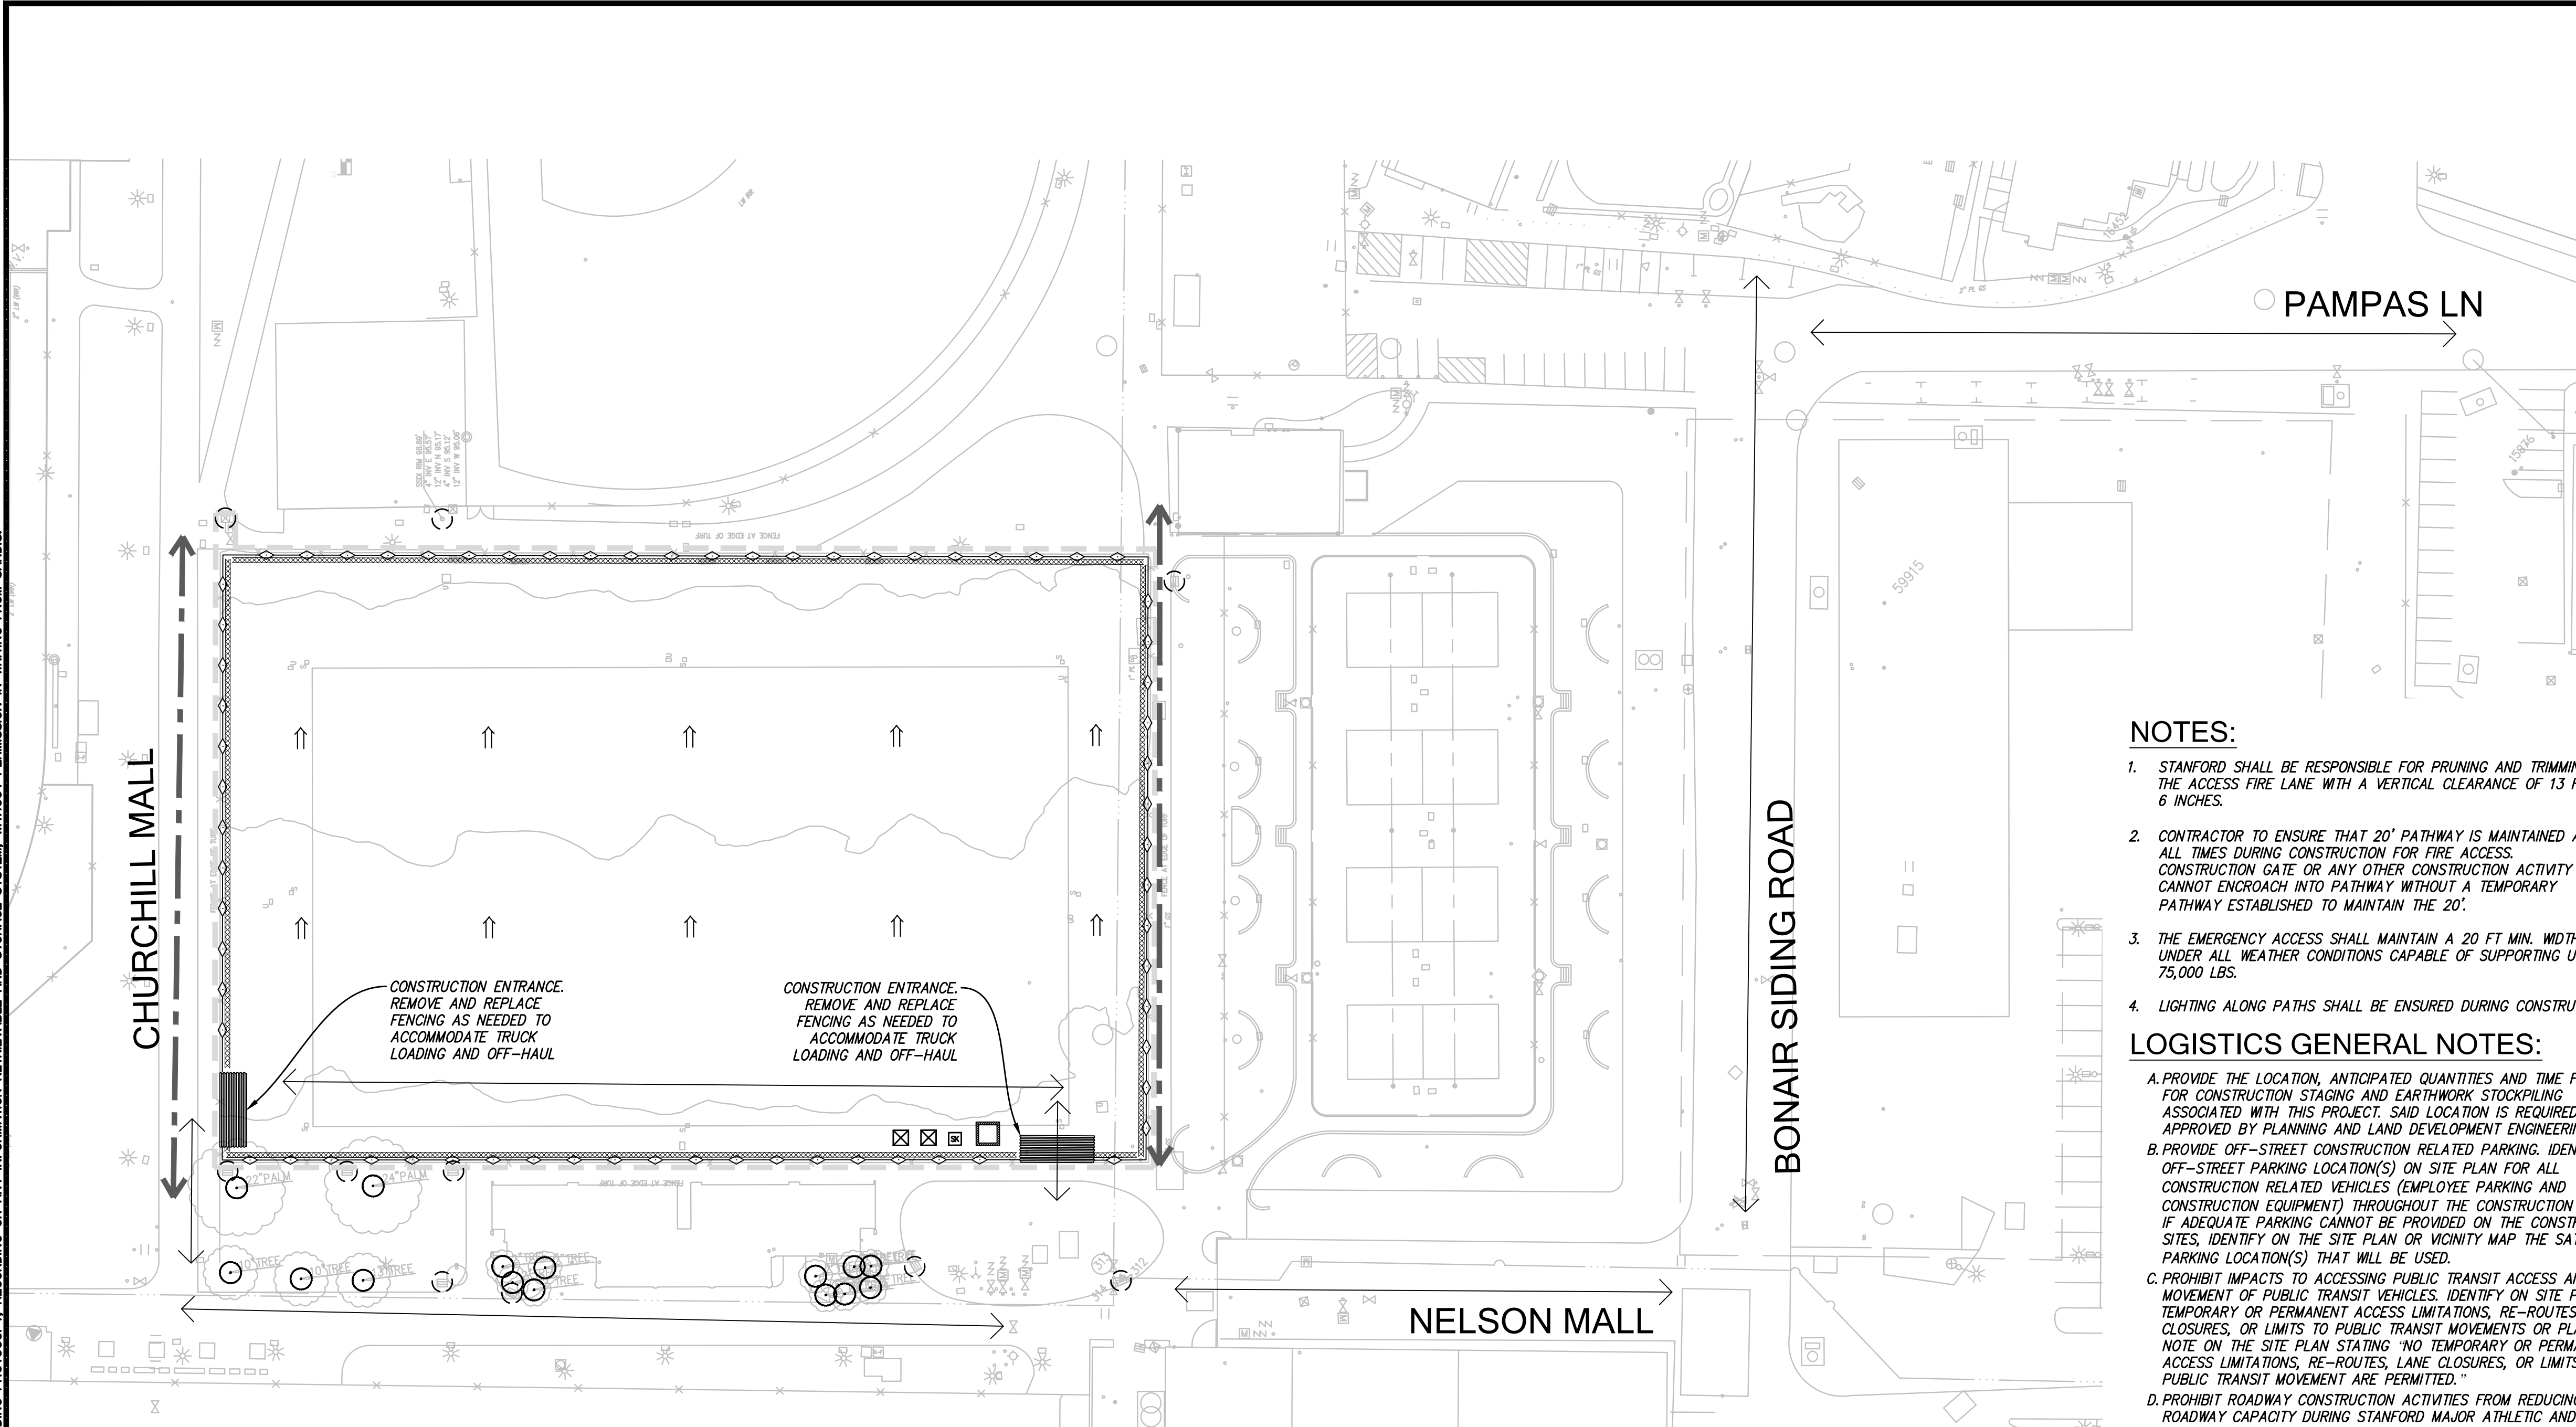

- LEGEND**
- CONSTRUCTION/FIRE TRUCK ACCESS ROUTES
 - TEMPORARY CONSTRUCTION FENCE / LIMIT OF WORK
 - PORTABLE RESTROOM
 - SPILL KIT
 - PEDESTRIAN CROSSING

NOTES:

1. STANFORD SHALL BE RESPONSIBLE FOR PRUNING AND TRIMMING THE ACCESS FIRE LANE WITH A VERTICAL CLEARANCE OF 13 FEET 6 INCHES.
2. CONTRACTOR TO ENSURE THAT 20' PATHWAY IS MAINTAINED AT ALL TIMES DURING CONSTRUCTION FOR FIRE ACCESS. CONSTRUCTION GATE OR ANY OTHER CONSTRUCTION ACTIVITY CANNOT ENCROACH INTO PATHWAY WITHOUT A TEMPORARY PATHWAY ESTABLISHED TO MAINTAIN THE 20'.
3. THE EMERGENCY ACCESS SHALL MAINTAIN A 20 FT MIN. WIDTH UNDER ALL WEATHER CONDITIONS CAPABLE OF SUPPORTING UP TO 75,000 LBS.
4. LIGHTING ALONG PATHS SHALL BE ENSURED DURING CONSTRUCTION.

CONSTRUCTION NOTES:

1. THE BAY AREA QUALITY MANAGEMENT DISTRICT (BAAQMD) HAS IDENTIFIED A SET OF FEASIBLE PMO CONTROL MEASURES FOR ALL CONSTRUCTION ACTIVITIES. THESE CONTROL MEASURES, AS PREVIOUSLY REQUIRED IN THE PROGRAM EIR, SHALL BE ADHERED TO DURING ALL CONSTRUCTION ACTIVITIES. (MITIGATION MEASURE AQ.1)
 - A. WATER ALL ACTIVE CONSTRUCTION AREA AT LEAST TWICE DAILY.
 - B. COVER ALL TRUCKS HAULING SOIL, SAND AND OTHER LOOSE MATERIALS OR REQUIRE ALL TRUCKS TO MAINTAIN AT LEAST TWO FEET OF FREEBOARD.
 - C. PAVE, APPLY WATER THREE TIMES DAILY, OR APPLY (NON-TOXIC) SOIL STABILIZERS ON ALL UNPAVED ACCESS ROADS, PARKING AREAS AND STAGING AREAS AT CONSTRUCTION SITES.
 - D. SWEEP DAILY (WITH WATER SWEEPERS) ALL PAVED ACCESS ROADS, PARKING AREAS, AND STAGING AREAS AT CONSTRUCTION SITES.
 - E. SWEEP STREETS DAILY (WITH WATER SWEEPERS) IF VISIBLE SOIL MATERIALS CARRIED ONTO ADJACENT PUBLIC STREETS.
 - F. HYDROSEED OR APPLY (NON-TOXIC) SOIL STABILIZERS TO INACTIVE CONSTRUCTION AREAS (PREVIOUSLY GRADED AREAS INACTIVE FOR TEN DAYS OR MORE).
 - G. ENCLOSE, COVER, WATER TWICE DAILY OR APPLY (NON-TOXIC) SOIL BINDERS TO EXPOSED STOCKPILES (DIRT, SAND).
 - H. LIMIT TRAFFIC SPEEDS ON UNPAVED ROADS TO 15 MPH.
 - I. INSTALL FIBER ROLLS, SAND BAGS OR OTHER EROSION CONTROL MEASURES TO PREVENT SILT RUNOFF TO PUBLIC ROADWAYS.
 - J. REPLANT VEGETATION IN DISTURBED AREAS AS QUICKLY AS POSSIBLE.
 - K. INSTALL WHEEL WASHERS FOR ALL EXITING TRUCKS, OR WASH OFF THE TIRES OF TRACKS OF ALL TRUCKS AND EQUIPMENT LEAVING THE SITE.
 - L. SUSPEND EXCAVATION AND GRADING ACTIVITY WHEN WINDS (INSTANTANEOUS GUSTS) EXCEED 25 MPH.

LOGISTICS GENERAL NOTES:

- A. PROVIDE THE LOCATION, ANTICIPATED QUANTITIES AND TIME FRAME FOR CONSTRUCTION STAGING AND EARTHWORK STOCKPILING ASSOCIATED WITH THIS PROJECT. SAID LOCATION IS REQUIRED TO BE APPROVED BY PLANNING AND LAND DEVELOPMENT ENGINEERING.
- B. PROVIDE OFF-STREET CONSTRUCTION RELATED PARKING. IDENTIFY OFF-STREET PARKING LOCATION(S) ON SITE PLAN FOR ALL CONSTRUCTION RELATED VEHICLES (EMPLOYEE PARKING AND CONSTRUCTION EQUIPMENT) THROUGHOUT THE CONSTRUCTION PERIOD. 2. IF ADEQUATE PARKING CANNOT BE PROVIDED ON THE CONSTRUCTION SITES, IDENTIFY ON THE SITE PLAN OR VICINITY MAP THE SATELLITE PARKING LOCATION(S) THAT WILL BE USED.
- C. PROHIBIT IMPACTS TO ACCESSING PUBLIC TRANSIT ACCESS AND MOVEMENT OF PUBLIC TRANSIT VEHICLES. IDENTIFY ON SITE PLAN ALL 3. TEMPORARY OR PERMANENT ACCESS LIMITATIONS, RE-ROUTES, LANE CLOSURES, OR LIMITS TO PUBLIC TRANSIT MOVEMENTS OR PLACE A NOTE ON THE SITE PLAN STATING "NO TEMPORARY OR PERMANENT ACCESS LIMITATIONS, RE-ROUTES, LANE CLOSURES, OR LIMITS TO PUBLIC TRANSIT MOVEMENT ARE PERMITTED."
- D. PROHIBIT ROADWAY CONSTRUCTION ACTIVITIES FROM REDUCING ROADWAY CAPACITY DURING STANFORD MAJOR ATHLETIC AND SPECIAL EVENTS. STANFORD SHALL NOT LIMIT ROADWAY CAPACITY DURING SPECIAL EVENTS OR DURING MAJOR ATHLETIC EVENTS, WHICH ATTRACT A LARGE NUMBER OF VISITORS TO THE CAMPUS.
- E. PROVIDE WRITTEN NOTIFICATION TO STANFORD POLICE AND PALO ALTO FIRE DEPARTMENT REGARDING CONSTRUCTION LOCATION AND CONSTRUCTION DATES. INCLUDE IN THE NOTICES ALTERNATE EVACUATION AND EMERGENCY ROUTE DESIGNATIONS TO MAINTAIN RESPONSE TIMES DURING CONSTRUCTION PERIODS, IF APPLICABLE. PROVIDE ONE COPY OF THE NOTICES TO THE COUNTY.
- F. PROVIDE WRITTEN NOTIFICATION TO ALL CONTRACTORS AND SUBCONTRACTORS REGARDING APPROPRIATE ROUTES AND WEIGHT LIMITS AND SPEED LIMITS FOR LOCAL ROADS USED TO ACCESS CONSTRUCTION SITES. PROVIDE ONE COPY OF THE NOTICES TO THE COUNTY PLANNING OFFICE.
- G. PROVIDE NOTIFICATION TO THE CITIES OF PALO ALTO AND MENLO PARK OF THE CONSTRUCTION SCHEDULE AND INCLUDE A COPY OF THE SANTA CLARA COUNTY APPROVED CONSTRUCTION AND TRAFFIC MANAGEMENT PLAN. PROVIDE ONE COPY OF THE NOTICES TO THE COUNTY PLANNING OFFICE.

4. NOISE CONTROL

CONSTRUCTION PRACTICES SHALL COMPLY WITH THE REQUIREMENTS OF THE COUNTY OF SANTA CLARA NOISE CONTROL ORDINANCE AND ARE TO BE MONITORED BY THE GENERAL CONTRACTOR THROUGHOUT THE CONSTRUCTION PROCESS. THE SUP REQUIRES THE FOLLOWING MEASURES TO REDUCE OPERATIONAL NOISE DURING CONSTRUCTION.

 - A. ALL OPERATIONAL NOISE SOURCES SHALL COMPLY WITH THE COUNTY NOISE ORDINANCE.
 - B. FOR CONSTRUCTION ACTIVITIES THAT WOULD AFFECT SENSITIVE NOISE RECEPTORS OFF-CAMPUS OR IN AREAS DESIGNATED CAMPUS RESIDENTIAL IN THE COMMUNITY PLAN, THE CONTRACTOR SHALL GIVE ADVANCED REGULAR NOTIFICATION OF CONSTRUCTION ACTIVITY SCHEDULED TO THE POTENTIALLY AFFECTED RESIDENTS.
5. CONTRACTOR TO PROVIDE A MINIMUM OF ONE 2-A-20-B-C PORTABLE FIRE EXTINGUISHER WITHIN 30 FEET OF THE LOCATION WHERE HOT WORK IS PERFORMED, IN ACCORDANCE WITH CFC 2604.2.6. ADDITIONALLY STRUCTURES UNDER CONSTRUCTION, ALTERATION OR DEMOLITION SHALL BE PROVIDED WITH NO LESS THAN ONE APPROVED PORTABLE FIRE EXTINGUISHER SIZED FOR NOT LESS THAN ORDINARY HAZARD AT EACH STAIRWAY ON ALL FLOOR LEVELS WHERE COMBUSTIBLE MATERIALS HAVE ACCUMULATED, IN EVERY STORAGE/CONSTRUCTION SHED, AND WHERE SPECIAL HAZARDS EXIST INCLUDING, BUT NOT LIMITED TO, THE STORAGE AND USE OF FLAMMABLE AND COMBUSTIBLE LIQUIDS IN ACCORDANCE WITH CFC 1415.1.
6. CONTRACTOR SHALL RESTORE ALL AREAS ADJACENT TO THE SITE THAT HAVE BEEN IMPACTED BY CONSTRUCTION OF THIS PROJECT. AREAS IMPACTED BY CONSTRUCTION MAY INCLUDE AREAS AT THE EDGE OF SITES AND BEYOND THE LIMIT OF WORK SHOWN ON THE PROJECT PLANS.
7. CONSTRUCTION PARKING SHALL BE LOCATED IN THE STADIUM PARKING LOT.
8. CONSTRUCTION FENCE WILL BE ADJUSTED AS NEEDED DURING CONSTRUCTION TO FACILITATE INSTALLATION OF IMPROVEMENTS. FENCE LOCATION WILL BE COORDINATED WITH STANFORD TO MAINTAIN PEDESTRIAN CIRCULATION.
9. COLONY TO PROVIDE CY OF EXCAVATED SOIL.

SANDIS

BUILD ON.
SANDIS.NET

DATE: 11/27/2023
SCALE: 1"=20'

PROJECT No.: 222518.A

DATE: NOVEMBER 27, 2023

NATHAN DICKINSON
R.C.E. No. 79716, EXPIRES 9-30-24

No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST



FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT

STANFORD CALIFORNIA

CONSTRUCTION SITE LOGISTICS AND SAFETY PLAN

SHEET
C-8.0

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM INCLUDING PHOTOCOPY, RECORDING OR ANY INFORMATION RETRIEVABLE AND STORAGE SYSTEM, WITHOUT PERMISSION IN WRITING FROM SANDIS.

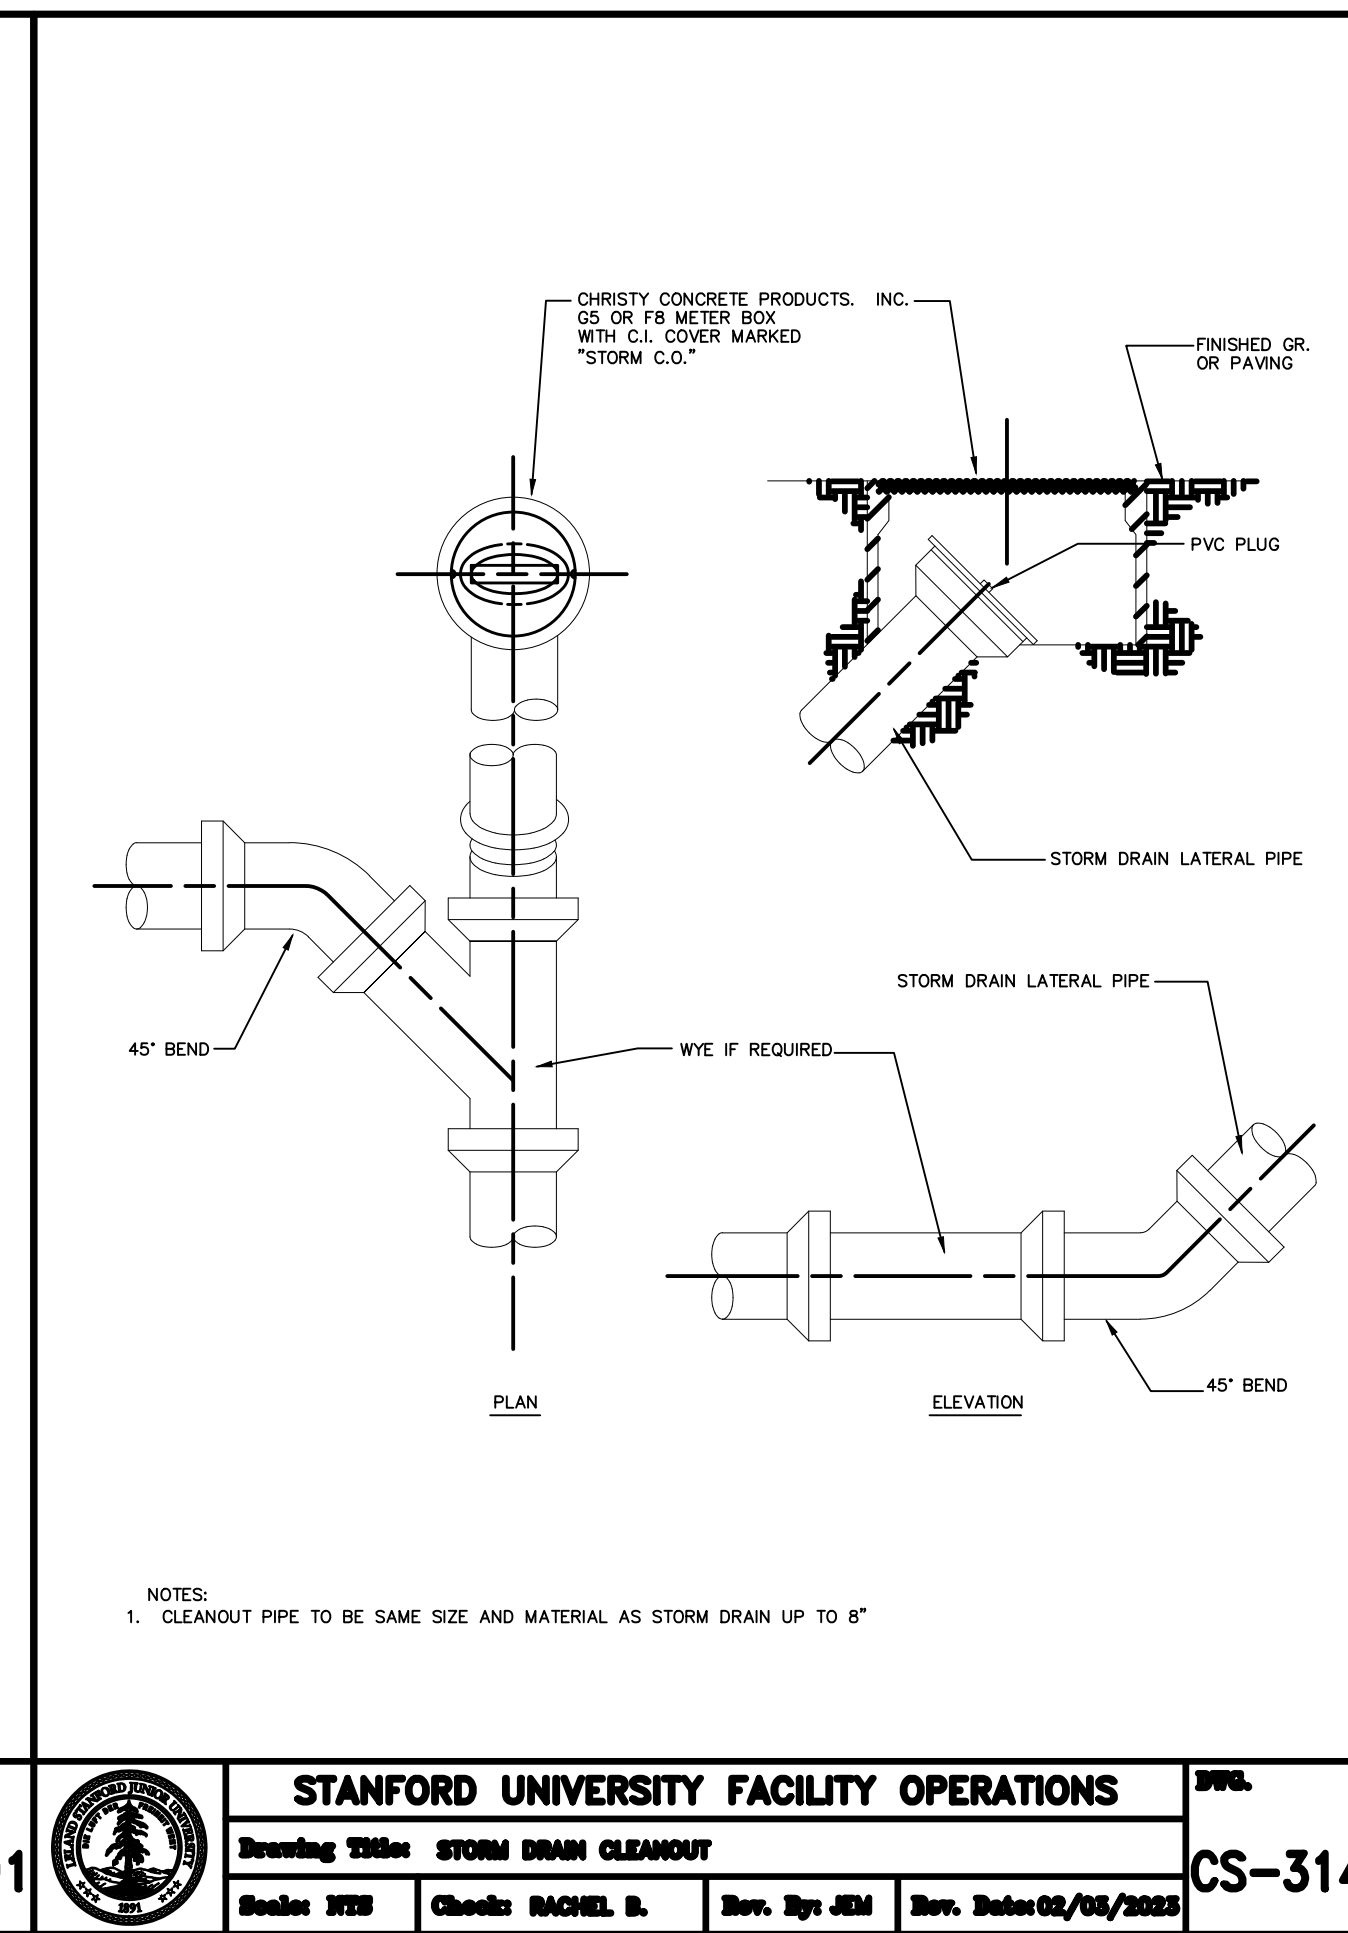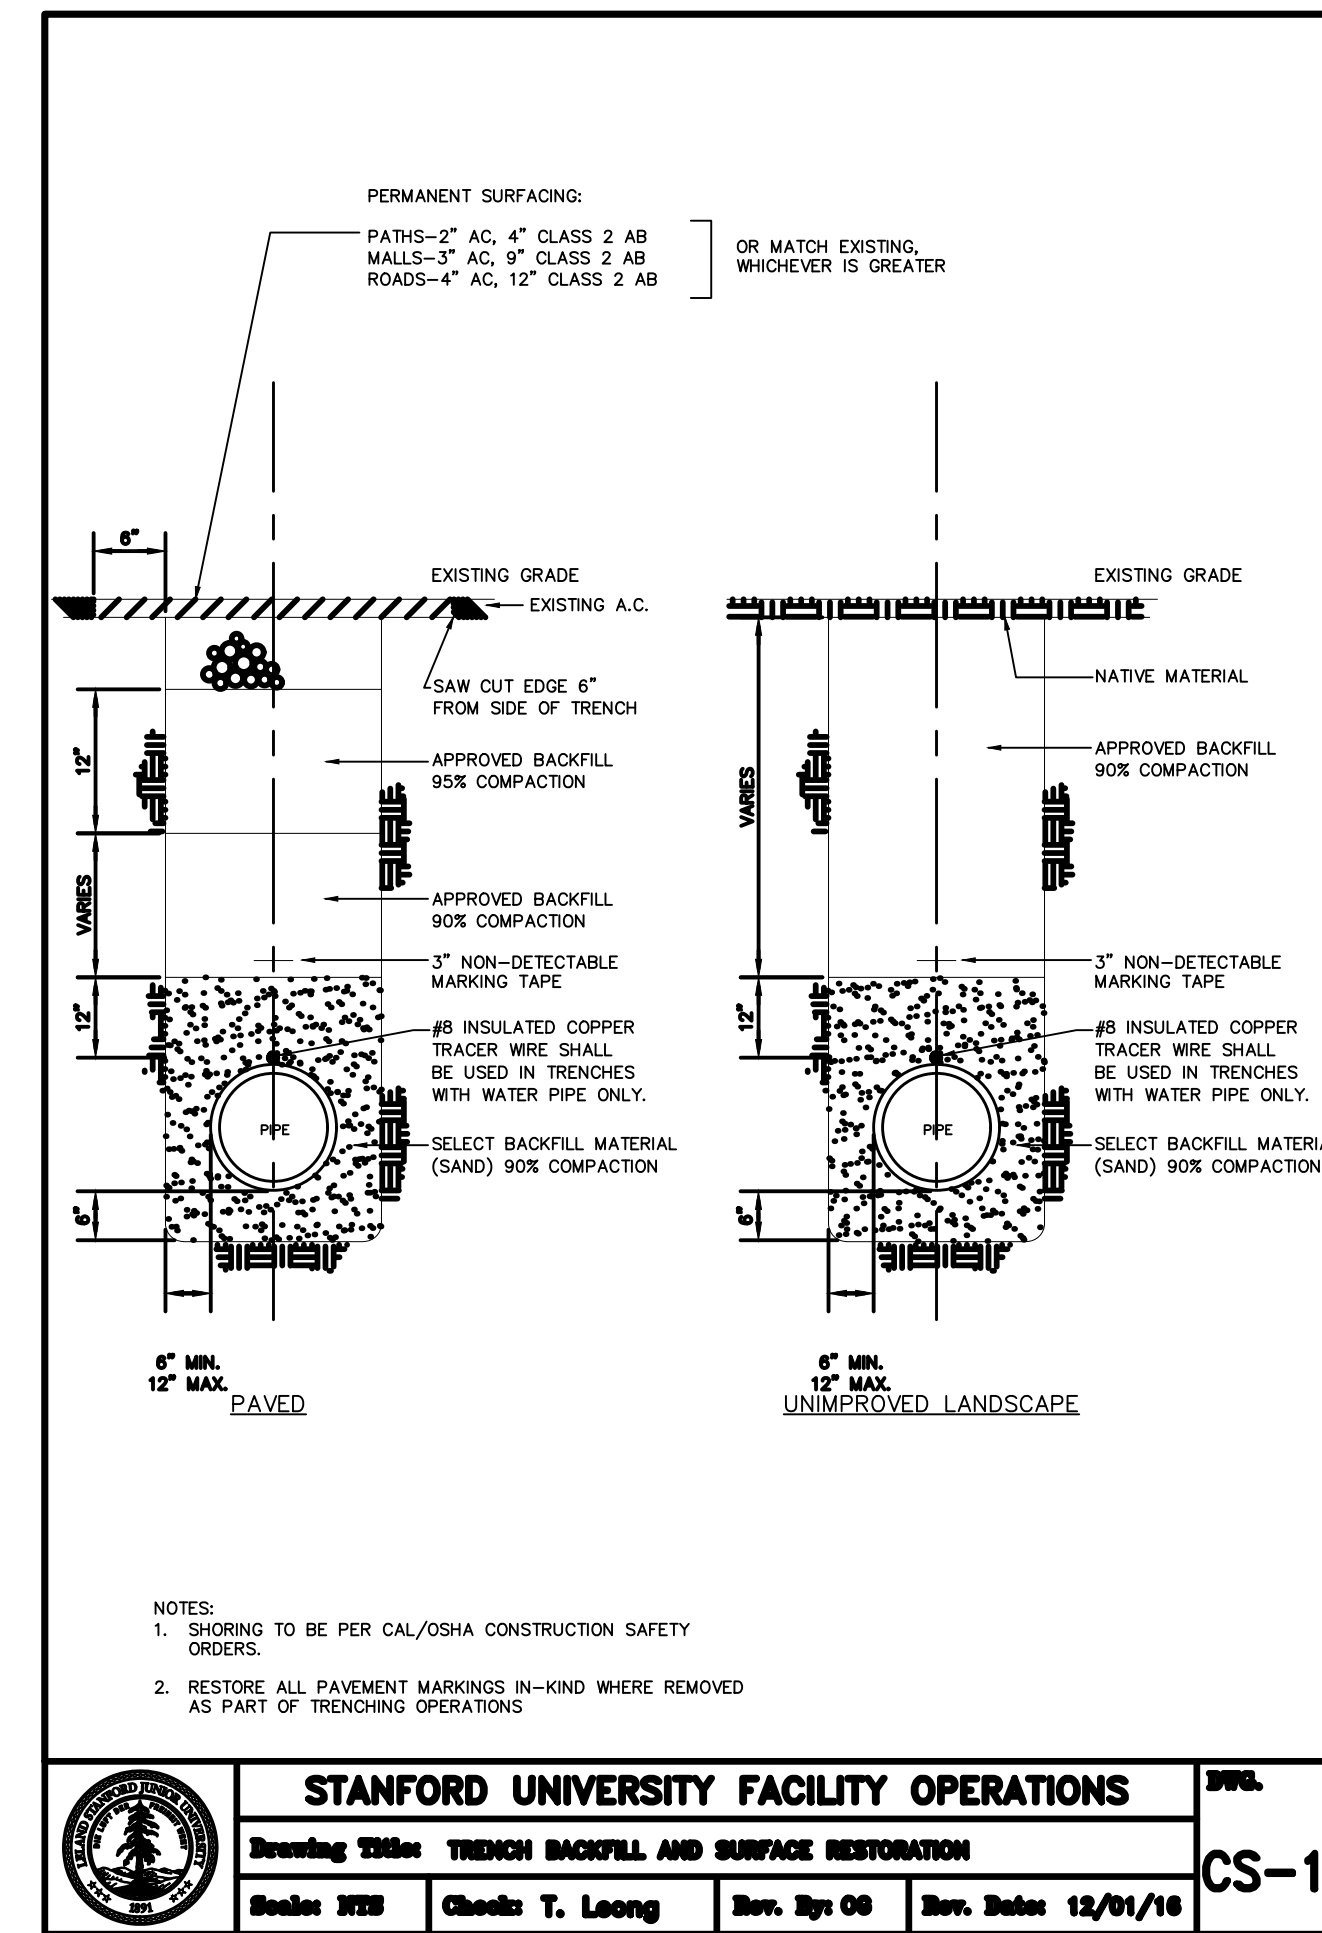

	STANFORD UNIVERSITY FACILITY OPERATIONS				CS-191
	Drawing Title: TRENCH BACKFILL AND SURFACE RESTORATION				
	Author: WES	Checker: T. Loong	Rev. By: GG	Rev. Date: 12/01/18	

	STANFORD UNIVERSITY FACILITY OPERATIONS				CS-314
	Drawing Title: STORM DRAIN CLEANOUT				
	Author: WES	Checker: MACHEL B.	Rev. By: JEM	Rev. Date: 02/05/2025	

ADS, Inc. Drainage Handbook

Specifications • 1-22

ADS ADVANEDGE® PIPE SPECIFICATION

Scope
This specification describes 12- and 18-inch (300 and 450 mm) ADS AdvanEDGE oblong corrugated pipe for use in subsurface drainage applications.


Product Requirements
ADS AdvanEDGE shall have annular interior and exterior corrugations.
• 12- and 18-inch (300 to 450 mm) shall meet ASTM D7001.

ADS AdvanEDGE outside dimensions shall be 1.5" thick by 12.5" wide or 1.5" thick by 18.5" wide. AdvanEDGE shall have internal bracing adjoining each long wall to prevent crushing under typical loading. AdvanEDGE shall be made available with or without an external geotextile wrap. When geotextile is provided, product shall meet the requirements of Class B Geocomposite as defined in ASTM D7001.

Material Properties
All pipe and fittings shall be made of polyethylene with a minimum cell classification of 424420C as defined and described in the latest version of ASTM D3350.

Perforations	12 (300)	18 (450)
Nominal Pipe Size in (mm)	12 (300)	18 (450)
Slot Length (avg.) in (mm)	1.125 (29)	1.125 (29)
Slot Width (avg.) in (mm)	0.125 (3.2)	0.125 (3.2)
Water Inlet Area (approx.) in ² /ft	15	25

Filter Fabric	Test Method	Minimum Average Roll Values
Fabric Properties		
Grab Tensile Strength (lb.)	ASTM D4632	112
Grab Tensile Strength (kN)		
Grab Elongation (%)	ASTM D4632	50
Grab Elongation (mm)		
Grab Tear (lb.)	ASTM D4633	40
Grab Tear (kN)		
Puncture (lb.)	ASTM D4633	40
Puncture (kN)	ASTM D4633	18
ADS U.S. Sieve Size	ASTM D4751	60
UV Resistance	ASTM D4355	50



© ADS, Inc., March 2020

AdvanEDGE® Drain Pipe

AdvanEDGE drain pipe provides the dimensional stability and field-proven structural strength for quick, effective subsurface drainage. The distinguishing performance feature of panel pipe is its ability to rapidly collect and remove water. Compared to 4" (100 mm) round pipe at an equal length of 12" (300 mm), panel pipe has twice the soil contact area and will drain a given quantity of water in 60% of the time.
AdvanEDGE is a perforated panel-shaped plastic core pipe available with either geotextile for soil filtration or without geotextile. AdvanEDGE is truly a pipe. It is not round, of course, but its panel-shaped core fully encloses the waterway. Lateral pillars maintain the core opening, resulting in a series of oval-shaped channels providing superior strength and relatively few projections into the waterway. The slim 1.5" (38 mm) profile permits a narrow trench and faster installation. The design of the invert permits significantly higher flow velocity at lower head.

- Applications**
- Highway edge drains
 - Athletic turf drainage
 - Building foundations and retaining walls
 - Waste management curtain drains
- Features**
- 12" (300 mm) oblong diameter
 - 100' (30 m) length available
 - Fast installation times
 - Manufactured from high-density polyethylene resin, which provides long-term durability
- Benefits**
- Can be installed vertically in narrow trenches or flat directly on a prepared subgrade
 - Invert design permits significantly higher flow velocity at lower head
 - Structural superiority confirmed by state field performance tests of edge drains



FLAT PANEL DRAIN PIPING 1

AdvanEDGE Pipe Specifications

Scope
This specification describes 12" (300 mm) AdvanEDGE oblong corrugated pipe for use in subsurface drainage applications.

Product Requirements
AdvanEDGE shall have annular interior and exterior corrugations.
• 12" (300 mm) pipe shall meet ASTM D7001

AdvanEDGE outside dimensions shall be 1.5" (38 mm) thick by 12.5" (317 mm) wide. AdvanEDGE shall have internal bracing adjoining each long wall to prevent crushing under typical loading. AdvanEDGE shall be made available with or without an external geotextile wrap. When geotextile is provided, product shall meet the requirements of Class B Geocomposite as defined in ASTM D7001.

Material Properties
All pipe and fittings shall be made of polyethylene with a minimum cell classification of 424420C as defined and described in ASTM D3350.

AdvanEDGE Perforations	12 (300)
Nominal Pipe Size in (mm)	12 (300)
Slot Length Average in (mm)	1.125 (29)
Slot Width Average in (mm)	0.125 (3.2)
Water Inlet Area (approximate) in ² /ft (cm ² /m)	15 (318)

AdvanEDGE Geotextile Wrap	Test Method	Minimum Average Roll Values
Fabric Properties		
Grab Tensile Strength (lb) (kg)	ASTM D4632	112 (51)
Grab Elongation (%)	ASTM D4632	50
Grab Tear (lb) (kg)	ASTM D4633	40 (18)
Puncture (lb) (kg)	ASTM D4633	40 (18)
Permeability (sec)	ASTM D4491	0.5
ADS U.S. Sieve Size (mm)	ASTM D4751	60 (2.5)
UV Resistance	ASTM D4355	50

* Weakest principle direction

ADS
800-821-6710



BUILD ON.
SANDIS.NET

DATE: 11/27/2023	DATE: NOVEMBER 27, 2023
SCALE: N.T.S.	
PROJECT No.: 222518.A	NATHAN DICKINSON R.C.E. NO. 79716, EXPIRES 9-30-24

No.	REVISION	DATE	BY
1	GRADING PERMIT SET	11/27/23	ST

FIELD HOCKEY FIELD BASE REPAIR AND REPLACEMENT
STANFORD CALIFORNIA

CONSTRUCTION DETAILS

SHEET **C-9.0**
OF 13 SHEETS